



11052-74

Gypsum-alumina expanding cement

11052—74

01.01.76

,
 (—).
 ,
 ,
 ,
 ,
 ,
 ,
 (10), 24
 ,

1.
 1.1. ()
 1:3 ((40X40X160))
 ,
 ,
 (280 / 3). 28
 1.2. 10
 — 4
 1 %
 ,
 ,
 1% °

1.3.			28
1.4.		008 , 6613	-
	90%		
1.5.		(40 40	-
160)	,		
,	3		
	0,7%.		0,1%
3.6.		(S0 ₃)	
	17%.		
1.7	,		-
	,	1:2 ()	-
		150 ,	24
	,		
		1,0 (10).	
2.			
2.1.			-
2.2.			
2.3.		300	.
		300	
2.4.			-
2.5.			-
	,		
	,		
2.6.			-
	,		
2.7.		20	.
2.8.		1	-
	300		
1	15		
2.9.			
	,		

2

3—5

1.

2.10.

3.

3.1.

310.4

-6

(24±2)

3.2.

310.3

(24±2)

 $(20\pm2)^\circ$

27

3.3.

3.3.1.

(40X40X160)

310.3.

(),

6

1500

15

3.3.2.

1

0,01
(20±2) ,
0,01
(72±4)

3.3.3.

2,


3

1,
4,

3.3.4.

0,01

160

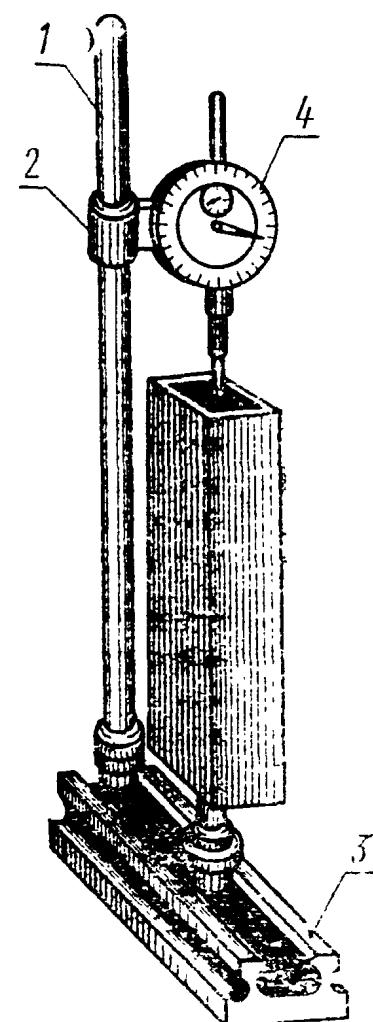

3.3.5.

1

3.3.6.

()

$$= -\frac{1}{2} h \quad 100,$$

U —*I₂* —

15%.

3.4.

3.4.1.

150

1:2

0,3.

310.4.

6

(72±4)

155

150

(,),

1 (10),

(20±2)^o ;

60%.

2

4

(2).

0,1 (1),

0,2

(2)

0,2

2

1,0 (10)

4.

4.1.

4.2.

2226.

4.3.

4.4.

4.5.

4.6.

5.

5.1.

5.2. — 2

1.

, 3. (),
 , . . , . .

2.

17.12.74 241

3. 11052—64

4.

()

,	,
310.3—76.	3.2, 3.3.1
310.4—81	3.1, 3.4.1
2226—75	4.2
6613—86	1.4

5. (1989).

. 30.10.89 . . 12.01.90 0,5 . . . 0,5 0,39 . . .
 . 4000 . 3

« » , 123557,
 , . . 3. , 256. . 2049