

11530-93

,

1

2
1993 .

21

:

3
2 1994 . 160

1 11530—93
1995 .

4 11530-76

5 . 2006 .

© , 1995
© , 2006

Rail joint bolts.
Specifications

11530-93

45.080
12 9600

1995-01—01

38, 43, 50, 65, 75,


16018.

1


1.1

1.

Исполнение 1

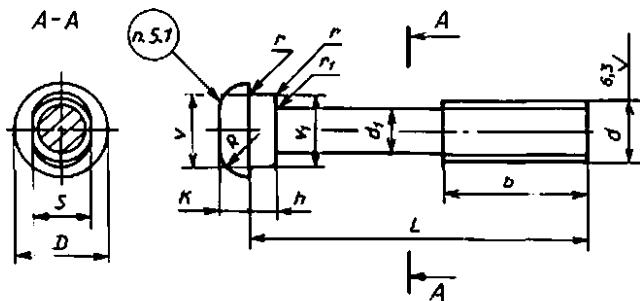

Исполнение 2

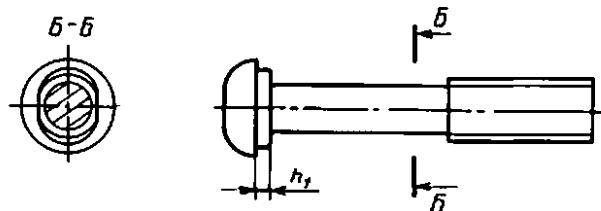

= ': di * </ .rfcp —

<i>d</i>	22	24	27	
<i>D</i> (. . . ± 1.25)	37	40	46	
(. . . ± 0.9)	13	14	17	
,		2,0		
<i>V</i>	. -1,0	31	33	38
		30	32	37
5 (. . . -2.1)		22	24	27
<i>h</i>	. -1.8		12	
*1			6	
			1 2	
"			3	
<i>b</i> (. . . +6)		56	66	
.		2,5	3.0	
<i>L</i>	1	135	150	130: 160
(. . . +6)	2	140	140; 160	150; 180

, 1, , *d* = 24 , ,
 8g, 150 , 8.8, 35:
 24-8§* 150.88.35 11530-93
 . 2, 160 , 10.9 40 :
 2M24-8gx 160.109.40 11530-93

2

2.1

1759.0.

2.2

8.8 1759.4 35

10.9

1759.4 40

8.8 10.9.

2.3

24705.

2.4

8g —

16093,

8h.

2.5

1,5

1.5 ,

2.6

— 1759.1.

2.7.

— 1759.2.

2.8

11532.

2.9

16018.

22

2.10

10.9

« ».

2.11

2.12. — 18160.

3

3.1 — 17769

3.2

1759.4.

3.3

— 5 , — 8

4

4.1

4.2 — 1759.1.

4.3 — 1759.2.

4.4

4.5 — 9454 . 6.6 1497 . 6.2 1759.4.

4.6

(),

2.

2

	. ()	
	8.8	10.9
22	252000 (25700)	315000 (32100)
24	293000 (29900)	367000 (37400)
27	381000 (38800)	477000 (48600)

5

()

1000 ,

3

22 135	448
24 150	585
27 130	696
27 160	818
2 22 140	449
2 24 140	522
2 24 160	592
2 27 150	750
2 27 180	872
<hr/>	
7850 / \	,

,	
1497-84	4.4
1759.0-87	2.1
1759.1-82	2.6, 4.2
1759.2-82	2.7, 4.3
1759.4-87	2.2, 3.2, 4.4, 4.5
9454-78	4.5
11532—93	2.9
16018-79	, 2.9
16093-2004	2.4
17769-83	3.1
18160-72	2.12
24705-2004	2.3

24.07.2006. 60 4/«.
.. . 0,93. - . 0,45. 53 . 513. 3091.
« » . 123995 , „ 4.
www.gostinfo.ru info@gostinfo.ru
« »
« * — . « » , » , 105062 , „ 6.