



13552—81

,

3

13552—8

Driving toothed chains.
Specifications

13552—68

41 7319

1981 . .	1471	20
		<u>01,01,82</u>
1986 . .	19.12.86 4138	01.01.92

1.

1.1.

1 —

2 —

1.2.




. 1 2 . 1.

* (1987 .)
1986 . (3—87).² 1.

©

, 1987




Тип 1

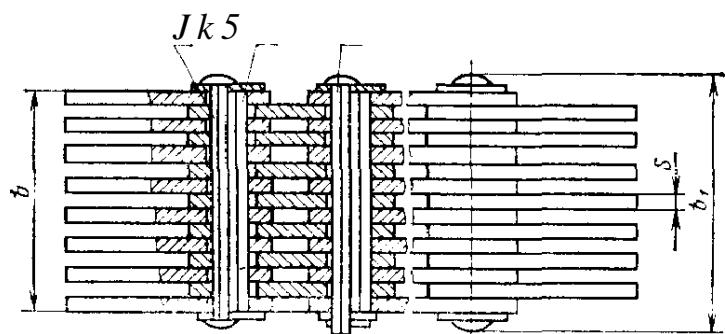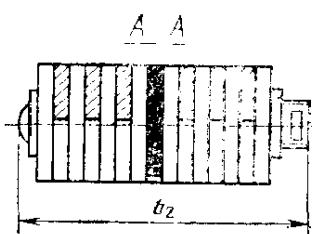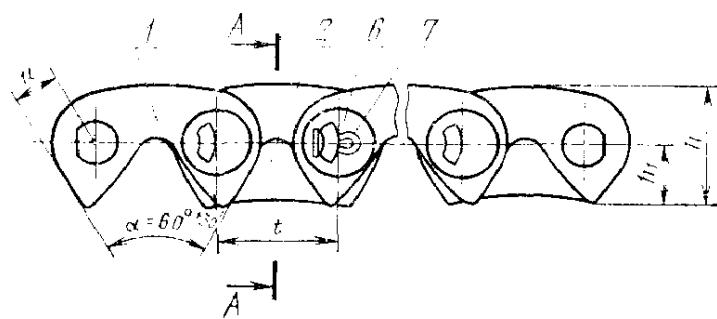

1—
4— ; 2—
; 5— ; 3—
; 4— ; 6—
; 7— ;

.1

2

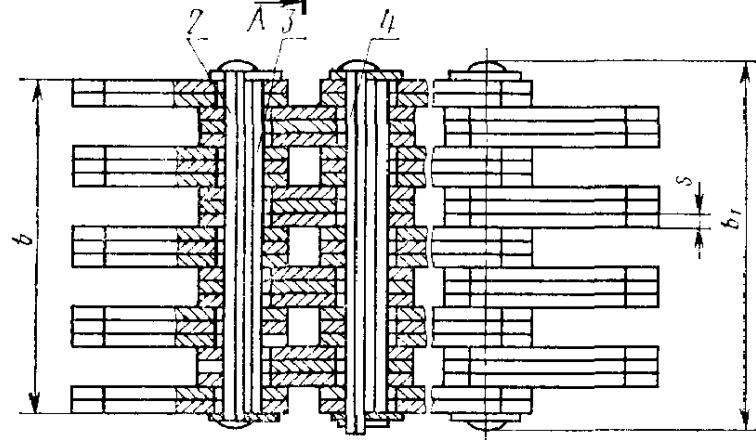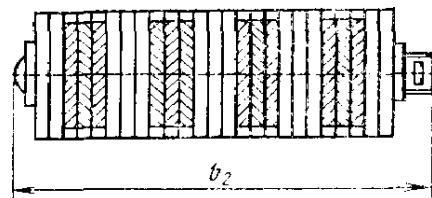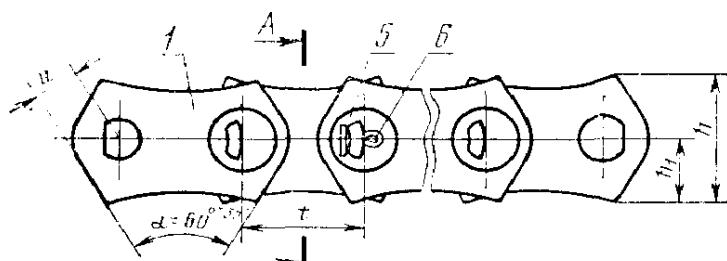

1—
; 2—
; 5— ; 3—
; 6— ; 4—

.2

	<i>t</i>	<i>ft.</i>			<i>h</i>	<i>hi</i>	<i>s</i>		<i>, (),</i>	<i>l</i>
-1-12,7-26-22,5		22,5	28,5	31,5				26(2600)	1,31	
-1-12,7-31-28,5		28,5	34,5	37,5				31(3100)	1,60	
-1-12,7-36-34,5	12,7	34,5	40,5	43,5	13,4	7,0	1,5	36(3600)	2,00	
-1-12,7-42-40,5		40,5	46,5	49,5				42(4200)	2,31	
-1-12,7-49-46,5		46,5	52,5	55,5				49(4900)	2,70	
-1-12,7-56-52,5		52,5	38,5	61,5				56(5600)	3,00	
-1-15,875-41-30		30,0	38,0	41,0				41(4100)	2,21	
-1-15,875-50-38		38,0	46,0	49,0				50(5000)	2,71	
-1-15,875-58-46	15,875	46,0	54,0	57,0	16,7	8,7	2,0	58(5800)	3,30	
-1-15,875-69-54		54,0	62,0	65,0				69(6900)	3,90	
-1-15,875-80-62		62,0	70,0	73,0				80(8000)	4,41	
-1-15,875-91-70		70,0	78,0	81,0				91(9100)	5,00	
-1-19,05-74-45		45,0	54,0	56,0				74(7400)	3,90	
-1-19,05-89-57		57,0	66,0	68,0				89(8900)	4,90	
-1-19,05-105-69	19,(15)	69,0	78,0	80,0	20,1	10,5	3,0	105(10500)	5,91	
-1-19,05-124-81		81,0	90,0	92,0				124(12400)	7,00	
-1-19,05-143-93		93,0	102,0	104,0				143(14300)	8,00	
-2-25,4-101-57		57,0	66,0	68,0				101(10100)	8,40	
-2-25,4-132-75		75,0	84,0	86,0	7	13,35	3,0	132(13200)	10,80	
-2-25,4-164-93		93,0	102,0	104,0				164(16400)	13,20	
-2-25,4-196-111		111,0	120,0	122,0				196(19600)	15,40	
-2-31,75-166-75		75,0	85,0	88,0				166(16600)	14,35	
-2-31,75-206-93		93,0	103,0	106,0	89,1	16,70	3,0	206(20600)	16,55	
-2-31,75-246-111		111,0	121,0	124,0				246(24600)	18,80	
-2-31,75-286-129		129,0	139,0	142,0				286(28600)	21,00	

$$\begin{array}{r}
 1 \quad t - 19,05 \\
 74 \quad = 45 \\
 -1 - 19,05 - 74 - 45 \quad 13552 - 81
 \end{array}$$

2.

2.1.

,

2.2.

,

2.3.

,

1.

(

)

,

2.

t	12,7	15,875	19,05	25,4	31,75
	0,20—0,40	0,25—0,45	0,30—0,50	0,40—0,60	0,50—0,70

2.4.

,

2.5.

not 9.306—85.

2.6.

,

3.

t	12,7; 15,875	19,05; 25,4	31,75
	0 —0,048	0 —0,058	0 —0,070

2.7.

0,15

.

2.8.

2.9. *
 1 49 29 2 25,4 37 ,
 31,75 , 0,25%.

2.10. -
 , 19,05 — 54 12,7 — 80 , 15,875 — 64
 32 , , , , , 31,75 —

2.11. ?

4.

4

-1 —12,7—26—22,5 -1 —15,875—41—30 -1 —19,05—74—45 -2 —25,4—101—45 -2 —31,75—166—75	250 470 940 2000 4300	160 300 600 1250 2700

11 5%.

(, . 1).

3.

3.1.

3.2.

1.2; 2.3—2.9, 5.1.
500

3.3.

2.4; 2.5; 5.1 —
 (); 2.8 — ;
 . 2.6; 2.7 — (8)
).
 3.4.

3.5.

3.6.

, 3.2; 3.4 4.2—4.4.6.
 3.7.

27.502—83 — 27.401—84
 6 = 0,2 =0,8

(, . 1).

4.

4.1.

10

4.2. , 2.7
 , 1%
 882—75. 0,15 8026—75

4.3.

13576—81 17 (1)
 22 (2).

«

4.4. (. 2.9)

, 8.051—81.

,

1%

,

4.5.

4.6.

(, . 1).

5. , ,

5.1.

5.2. — 9.014—78.

5.3.

10198—78,
(515—77)

; ;

, ,

,

5.4.

, ; ;

; ;

; ;

5.5.

, — 15150—69.

6.

6.1.

6.2.

— 12

(

1).

							, %
]	-	-1	()	-	-	
	x	FT CQ					
-1 -12,7—26—22,5	90	23	46	2500	0,35(35)	250	5,1
-1 —15,875—41—30	90	23	46	1850	0,60(60)	350	3,8
-1—19,05—74—45	90	23	46	1400	1,20(120)	470	2,6
-2—25,4—101—57	76	22	44	900	2,00(200)	600	1,5
-2—31,75—166—75	76	22	44	650	3,00(300)	800	

1.

7

2.
3.

1

. 28.05.87 . . 09.11.87 0,75 . . 0,75 . . 0,52 . .
6000 3 . .
« . . » . .
. . 123840, . .
. . 3. . .
. . , . . 12/14. . 2874.

11

s

mol
cd

rad
sr

	Hz		c^i
	N		- -2
		" "	* - "2
	J	2 "	~2
	W	2 •	* "3
	V	2 -	* "3
	F	~? -1 • € 4	2
		2 -	* "3 * " *
	S	~2 *	— 3 - *
	Wb	2 * * -2 "1	
		-2	-1
		2 -	- -2 * ~ " *
	1		
	!	"2 •	*
	Bq		1
	Gy	2 *	"
	Sv	2 *	- *