

13976-74*

Caps for tube connections on external cone
Construction and dimensions

13976-68

10 1974 . 2124

01.07.75

1985 .

1.
2.
. 1 2 .. (1988) 5 1, 2,
1980 , 1986 (3-81, 5-86)




0240/ (V)

ftzWj V /)



1

2

1

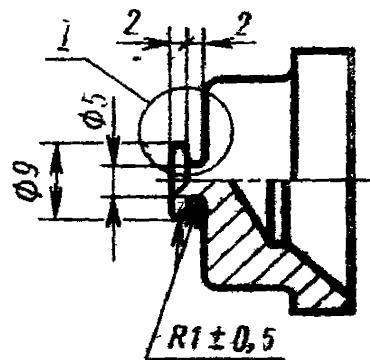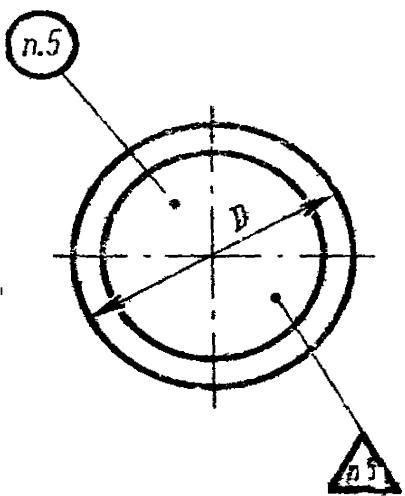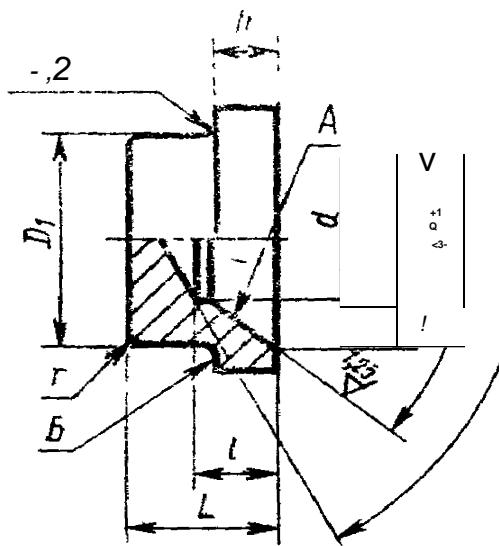

22

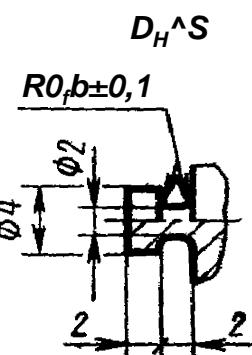

.3

.2

*5 5*3 «	—		D	D	h	1	L	±0,5	100	—	—	
						—			—	—	—	
3		1,5	5	6,5	4,0	3,0	5,0	7,0		—	0,08	
4		2,0	7	8,5	5,0	4,0	5,5	8,0		—	0,08	
6		3,0	9	10,5	7,0		6,0			0,12	0,33	
8		5,0	10	12,5	9,0		4,5	9,0		0,17	0,47	
10		7,0	12	14,5	11,0		5,5			0,26	0,72	
12		9,0	15	17,8	14,0	4,0	5,0			0,46	1,28	
14		12,0	17	19,8	16,0		5,0	5,5	0,0	0,54	1,51	
i6		13,0	20.	21,8	,18,0			6,0	12,0	0,68	1,89	
18		15,0 ¹	23	24,8	20,0	6,0	7,0	14,0		0,94	2,62	
20		17,0	26	27,8	22,0	6,5	8,0	15,0		1,24	3,46	
22		19,0	28		24,0	7,5	13,0	16,0		1,35	3,77	
25		22,0	27;	30,0	27,0	5,5	10,0	14,0		1,84	4,58	
28		23,0		36,0	30,0	8,0	13,0	17,0		2,36	6,58	
30		26,0		34	32,0	6,0				2,46	6,87	
32			27,0		39,0	34,0	7,5		11.0	15,0		
34				40	42,0	36,0	8,5	14,0	18,0		2,66	7,42
36		30,0		43	45,0	38,0			7,5	12,5	3,00	8,37
38		32,0				40,0					3,39	9,46
											3,63	10,15

1

 $D_H = 12$

13976—74

, 12 18 9 :

1—12—13

13976—74

, 45:

1—12—22

13976—74

, 13 11 2 2 :

1—12—

13976—74

