



14791-79

22 1979

71

14791-79

Sealing non-hardening building mastic.
Specifications

14791—69,
5.2129—73

57 7541

22 1979 . 71

01.01.1981 .

50 70° ,
10—30 10%.

1.

1.1.

1.2.

		1
/ 2	,	
	-	0,10—0,15
	, %,	45
	, %,	0,2
	,	7—11
	70° (-	0,4
) ,	,	7—11
	-	1,0
	50° , %,	2,0
		7,0

1

1982 .

50°

1.3.

1

1.4.

2.

2.1.

2.2.

3%,

3

2.3.

70°

2.4.

50°

2.5.

2.6.

3.

3.1.

18

$20 \pm 2^\circ$

3.2.

(

).

3.3.

$20 \pm 2^\circ$

3

3.4.

,

10%.

3.5.

,

3.5.1.

7762—74,

,

. 1.

:
1,0%;
 $1 \pm 0,5$ $10 \pm 2,0$ / .

1,0%.



0,1

3.5.2.

. 2.

200

50X50X25

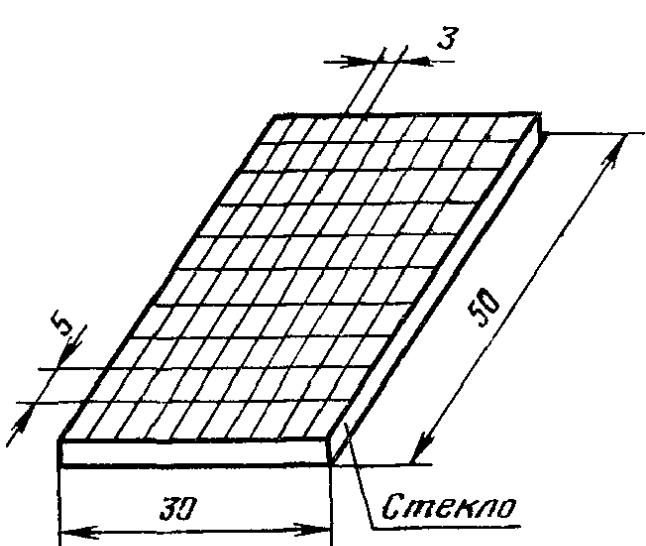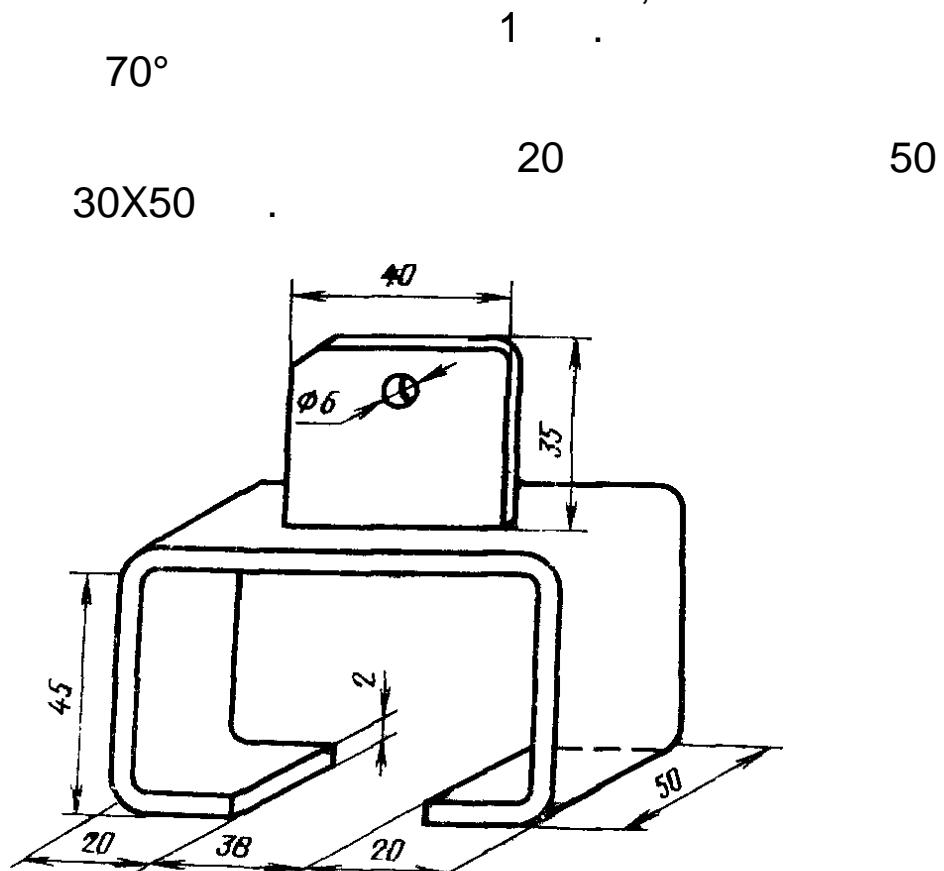

30x50X20

3.5.3.

(;)
 ».

« — ».

0,1 .

Rp / 2

S'

—
 5 — , ; ,
 2 , %

$$8 = \frac{Ah}{h} \cdot 100,$$

h — ,
 h — , .

, ,
 , 3 , .

(. 2) ,

10%

3.6.

3.6.1. (10) 70°
 0,001 .
 50X50 ,
 24 0,001
 $20 \pm 2^\circ$.

3.6.2.

W %

|P=£=£«. 100,

go —
Si —

, ; , ;

3.7.

150

5346—78,

70°

,

3

20±2°

3.8.


70°

(

)

3.8.1.

. 3.

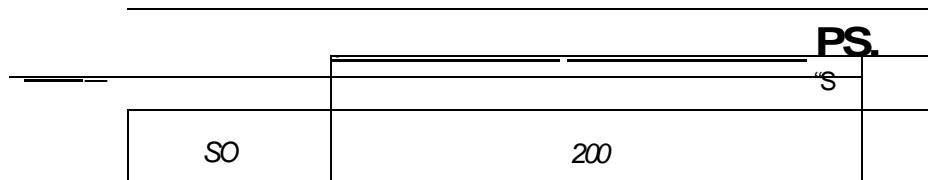

. 3

1,4

1,0 —

1

70° ,

20±2°

3

3.8.2.

70°

24 .

24

1,0 ,

40X40X60

3.9.

50°

3.9.1.

3.5.1,
 $\pm 0,5$ /

10±

3.5.2.

1

50°

15

7%

50°

»

3.10.

3.10.1.

3.11.

20 5 ,

1

1982 «

25 ,
12026—76. $\pm 5^\circ$

4

100±

73.

4.

4.1.

60x30

500

40

10354—

30—50

150

50
4.2.

14192—77.

*

4.3.

4.4.

1.9—67.

4.5.

4.6.

4.7.

5.

5.1.

5.2.

$20 \pm 2^\circ$

24

6.

6.1.

6.2.

6.3.

03.08.79	,	01.10.79	0 , 75	. 0,66	.	.	.	16000	3	.
«	»			.	123557,	,	,	256»	.	2094