



15960-79

8-91
3 .

15960—79

Friction flexible asbestos materials
and products of them. Specifications

25 7163, 25 7134

01.07.80
01.01.95

(), (,)

200 °C.

,

· (, . . 4).

1.

1.1.

. 1.

1.2.

. 2.

1.3.

. 3.

©

, 1979

()

, 1992

,

	-		
-1	8—45—62	25 7163 5200	1,5 , (15 / σ^2)
-2	6 —10 6 —56	25 7163 2600 25 7163 2600	2,5 , (25 / σ^2)
-3	6—147 —59	25 7163 4400	, 0,8 (8 / σ^2)

2

.	.	5,010,4	,0±0,4	8,0±0,6	10,0±0,6
50		4	4	4	—
55		4	4	4	4
60		4	4	4	4
65		4	4	4	4
70		4"	4	4	4
80		+	4	4	4
90		4	4	4	4
100		—	4	4	4
120		—	4	4	4
140		—	—	4	4
160		—	—	4	4

(, . 4).

3

	,					

25 7134 2617	56	$\pm 1,5$	5,0	$\pm 0,4$	250,0	$\pm 3,0$
25 7134 2623	70	41,0	5,0	$\pm 0,4$	107,7	$\pm 2,0$
25 7134 2628	90	$\overline{-2,0}$	5,0	$\pm 0,4$	113,5	$\pm 2,0$
25 7134 2633	90	$\pm 0,5$	5,0	$\pm 0,5$	823,0	$\pm 3,0$
25 7134 2817	56	$\pm 1,5$	5,0	$\pm 0,4$	250,0	$\pm 3,0$

	,					
	.	:	.	:	.	.
25 7134 2823	70	4-1,0 —2,0	5.0	±0,4	107,7	±2,0
25 7134 2828	90	+0,5 -2,0	5.0	±0,4	113,5	±2,0
25 7134 2833	90	±1,5	5.0	±0,3	823,0	±3,0
25 7134 4402	20	±1,0	4,0	+0,4 —0,2	127,5	±4,0
25 7134 4403	20	±1,0	4,0	+0,4 —0,2	184,0	±4,0
25 7134 4405	22	±1,0	4,0	+0,4 —0,2	129,0	±4,0
25 7134 4406	25	±1,0	4,0	+0,4 —0,2	1.84,0	±4,0
25 7134 4407	29	±1,0	4,0	+0,4 -0,2	124,0	±4,0
25 7134 4408	29	±1,0	4,0	+0,4 -0,2	152,0	±4,0
25 7134 4409	29	±1,0	4,0	+0,4 -0,2	148,0	±4,0
25 7134 4411	31	±1,0	5.0	+0,4 —0,2	172,0	±2,5
25 7134 4412	30	±1,0	5.0	+0,4 -0,2	198,0	±4,0

5

90

:

-1 5x90

15960—79

-2

5 ,

56 ,

-2 5 x 56 x 250 :
, . 1, 4).

15960—79

2.

2.1.

,

(

, . 4).

.4

15960—79

2-2.

2.3. (8000 , . 4).

2.4.

2.5. 7

.4.

.4.

4

1

0,5 1
- 1 1 2

0,5 2

1,0 2

1,0 1
0,5 1
- . 1

0,5 2

:

1.

2.

(2.6.

, . 2, 3, 4).

(2.7.

, . 2, 3).

.5.

2.8.

0,5

3.

3.1.

500 ' 2
10000 .,

5

	-1	2	-
1.	20 15 :	0,40—0,60	0,39—0,54
2.	20 15 , , :	0,08	0,17
3.	, %,	0,5	1,5
4.	,	0,5	2,0
%,			1,1

:

— ;
— ;
— ;
— ;
— ;
— ;
— ;
— ;
— ;

3.2.

— 100 %;


3.1; 3.2. (, , , 4).
3.3.

4.

4.1.

4.2. -1 , 0,1 166—89.
 0,1 (166—89).

4.3. ,
 11358—89 25—100 , 25—60 . 4.2. 0,1

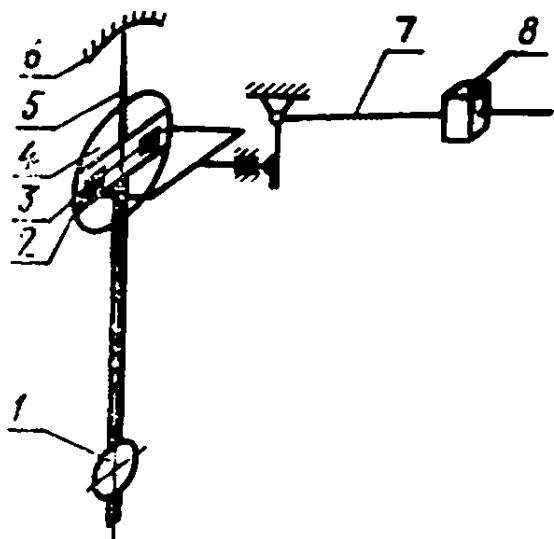

*f— ; 4— ; 2— ; — ; 8— ; 7— ; s— ; 3— **

4.5.1.

-77

0,5

22X27 . 4.4

. 4.5.2, , , .
 (4.5.2.
 :
)

(-1 4-2 15 1412—85)
 -3 (20 1050—88).

(0,100±0,002) .

3443—87: — (4—); (1— 4); (43— 90);
 (2- 5); —(>70); (1,0— 1,6).
) 170—190;

) 0,27±0,02 (2,7±0,2 / 2);
) 7,0—7,5 / ;
) 100—120 °C.

100—120 °C 5 45 ,
 10

([) .

$\hat{NR},^l$

4 — ; , - (10
 /? — , 321 ;
 .

, . 2.6. ±5 %.
 (, . 1, 4).

4.5.3.

$11,6 \pm 1,0$ - (1,16±0,10₂ -).

25

6507—

90.

,

2.6.

(4.6.

, . 4).

30X60

±10%.

±1

. 4.4

0,01 , ' 4 -63/ 1 20 °C. 2874—82
10541—78.

, (X)

 $X = \sim -100,$

m —\—

, ; , .

,

,

. 2.6.

±2 %.

(4.7.

180°

, . 2, 4).

40

,

5. , ,

5.1. — , 27513—87.

. 5. (, . 4).

6.

6.1.

(, . 2).

		-1	-2	-3
		2,00-2,15	2,10-2,25	2,10—2,20
	45	0,44	0,40	
(1050—88),	—	0,12	0,50	
	—			

. 10

15960—79

1.

., . . , . ; , . . ; . . , . . , . . ;

2.

28.05.79

1920

3.

15960—70

4.

-

.	» ,
166—89	4.1, 4.2
427—75	4.3
1050—88	4.5.2,
1412—85	4.5.2
2874—82	4.6
3443—87	4.5.2
6507—90	4.5.3
7502—89	4.3
10541—78	4.6
11358—89	4.3
27513—87	5.1
5.	01.01.95
27.03.89	727
6.	(1992 .) 1981 ., 1992 . (10—81, 1—84; 2—87, 6—89) 1983 ., 1, 2, 3, 4, 1986 .,

.22.07.92. . . .04.00.92. , 0,75, , .- , 0,75.

.. 0,69. .1362 .. , 123557, , ,
`` * .. 3. , 256. , 1705