

16017-79



2006

16017-79

Inserted bolts for rail track fastenings.
Design and dimensions. Technical requirements

16017—70

MKC 45.080
12 9700

26	1979 .	1547
		<u>01.01.81</u>
03.06.92	523	

) (), ()

16018—79,


(, . 1, 4).

1.

1.1.


(2006 .)
1985 ., 1990 ., 1992 .(1, 2, 3, 4,
8—81, 2—86, 10—90, 8—92). 1981 .,

© , 1979
© , 2006

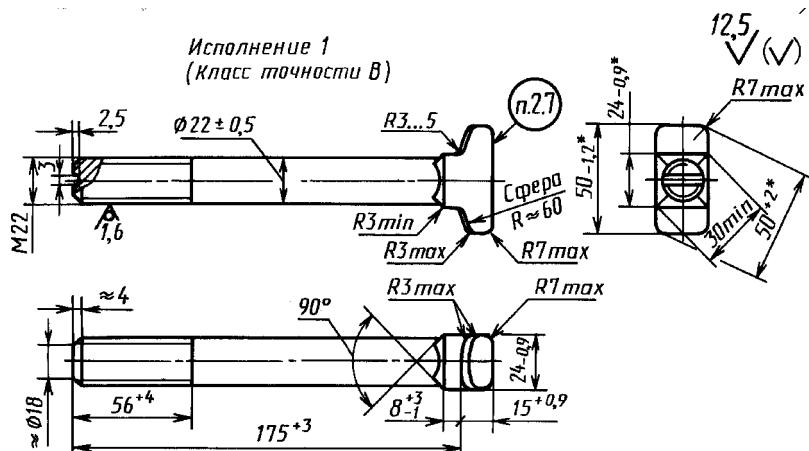


() 2



25 ✓(✓)

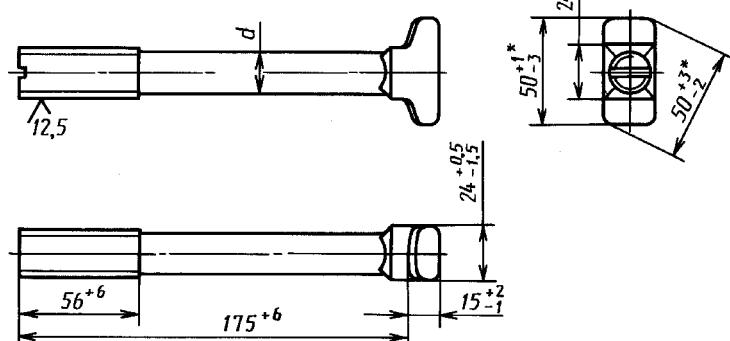

() 3

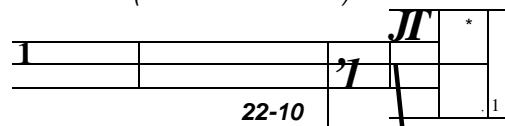

JJ * 1

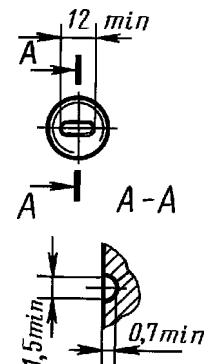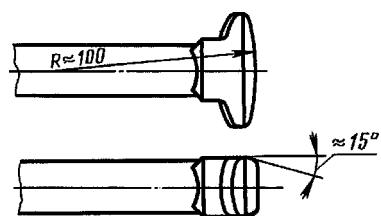

$d \ll d_{cp}$, $d_{cp} -$

*

1, $d = 22$, , , , , , ,
 3.6, , , , , , , ,
 :
 M22—8gx 175.36. .0115 16017-79.
 , , 2,
 2 M22—8gx 175.36. 16017-79.
 (, . 2, 3). 145 225
 1.2.
 40 84 10 , , :
 4 — 60 ;
 6 » » » .60 .
 1.3.
 (, . 3).
 2.
 2.1.
 1759.0—87 , , ,
 2.2. 1759.4—87. 3.6, 4.8 5.8
 2.1, 2.2. (, . 3).
 2.3.
 9—18 — 9.301—86.
 (, . 1).
 2.4. — 24705—2004. 8g 16093—2004.
 2.4. 1,0 25
 (, . 2).
 2.5.
 0,9 .
 2.6.
 5° 2
 (, . 3).
 2.7.
 (, .).
 0,5 .
 2.8. 1000 (, .):
 635 — 1 3;
 591 — 2.
 :
 1. 1, 2 3,
 2. 1000 10
 25.7 — 1 3;
 29.8 — 2.
 2.9. — 17769—83.
 2.10. — 1759.0—87.
 1759.4—87.

1759.1-82. — 1759.2—82.
(, . 2, 3). — 9.302—88.
2.11. (, . 2). — 18160—72.
2.12. — 16018—79.
2.13.
2.14.
2.15.

25.01.2006. 14.02.2006. 60 84 Vs-
0,93. - 0,40. 69 . 99. 2457.

« » , 123995 , „ 4.
www.gostinfo.ru info@gostinfo.ru
« »
« » — « » , 105062 , „ 6