


16040-70*

Semispherical solderable sleeves for tube connections on internal cone.
Construction and dimensions

5 1970
 839 01.01.71

1.

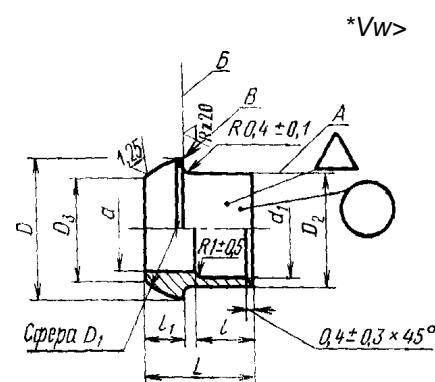

* (1987 .)
 1980 ,
 1, 2,
 1986 .
 (3—81, 5-86).

			<i>D</i>	Σi		<i>d</i> ₂		<i>I</i>			
<i>d</i>	MI	100
	11	All	$\pm 0,2$	$\pm 0,4$	
6	4	6	11,5	11,5		8,5	5,5	6	6,5	15	0,60
8	6	8	13,5	13,5		10,5	7,5				0,80
10	8	10	15,5	15,5	+0,2 -0,1	12,5	9,5	8	$\pm 0,2$	7,0	18
12	10	12	17,5	17,5		14,5	11,5			7,5	1,18
14	12	14	19,5	19,5		16,5	13,5	10		8,0	1,41
16	14	16	21,5	21,5		18,5	15,5				1,49
18	16	18	24,0	24,5		21,0	17,5				1,84
20	18	20	27,5	28,0		23,0	21,5				2,72
22	20	22	30,0	30,5		25,0	23,0	8,5			3,06
24	22	24	30,5	31,0		27,0	23,5		12		3,18
25	23	25	32,5	33,0		28,0	25,0				3,74
28	26	28	35,5	36,0	$\pm 0,2$	31,0	28,0	14	$\pm 0,4$		4,22
30	28	30	36,5	38,0		33,0	29,5				4,49
32	30	32	39,0	41,0		35,0	32,0	9,0			5,47
34	32	34	42,0	44,0		37,0	34,0				6,76
36	34	36	45,0	47,0		39,0	37,5	26			7,24
38	36	38	45,5			41,0	38,0				8,84

(
2. : , 25 12 18 9 (18 9).
3.
4.

D_x —

— 0,05

(
5. , — 2).

16078—70.

D_H 18

25:

18—023 16040—70

, 12 18 9 :

18—012 16040—70

,

: 18—023 16040—70

18—012 16040—70