


Spherical head stoppers for tube connections on internal cone.
Construction and dimensions

16076-70*

839

5 1970 .
01,01.71

1.

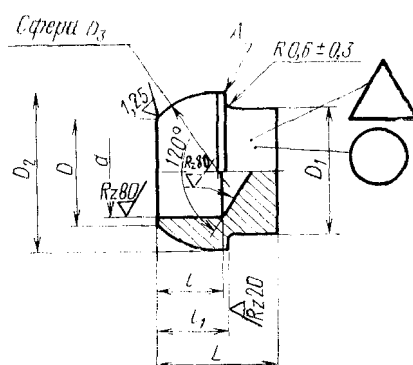

* (1987 .) 1,
1980 . (3--81).

							1	ii	i L	
	L_T	D					+0,4	$\pm 0,2$	$\pm 0,4$	100
6	4	5,5	8	11,5	11,5		8,0	6,5		0,42
8	6	7,5	10	13,5	13,5			12		0,70
10	8	9,5	12	15,5	15,5	0,2	7,0	7,0		0,92
12	10	11,5	14	17,5	17,5	-0,1		7,5		1,28
14	12	13,5	16	19,5	19,5			8,0	13	1,56
10	14	15,5	18	21,5	21,5		6,5			1,76
18	16	17,5	20	24,0	24,5					2,70
20	18	21,5	22	27,5	28,0		6,0			3,66
22	20	23,0	24	30,0	30,5		5,0	8,5		4,54
24	22	23,5	26	30,5	31,0		4,5			4,70
25	23	25,0	27	32,5	33,0	$\pm 0,2$				5,36
28	26	28,0	30	35,5	36,0		3,5			6,50
30	28	29,5	32	36,5	38,0		3,0			7,30
32	30	32,0	34	39,0	41,0		2,5			8,70
34	32	34,0	36	42,0	44,0		2,0	9,0		10,10
36	34	37,5	38	45,0	47,0		1,5			11,80
38	36	38,0	40	45,5			1,0			15,50

(1).

2. : 45, 12 18 9 (18 9).

3. : 15. . / — 45; . —

12 18 9 .

4. . — 16078—70.

5. — 16078—70.

 $D_H 16$

45:

16—022 16076~70

12 18 9 :

16—012 16076—70

:

16-022 16076—70

16-012 16076—70