


16077-70

Tapered stoppers for tube connections on internal cone.  
Construction and dimensions

839

5      1970  
01.01.71

1.

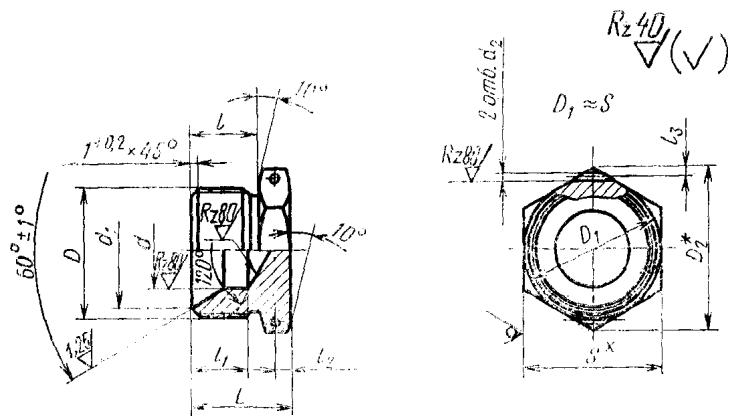

1987 .

	d	d\l	$d_2$ -0,12 — 0,06	D	D <sub>s</sub>	5	* 1, 1	! <sub>is</sub>	1 <sub>L</sub>	100				
							1, 1							
							±0,4	±0,2	±0,4					
6	4	11,0	1,5	MI 4 X 1,5	19,6	17	13	2,5	18	1,94				
8	6	13,0		16 1,5						2,76				
10	8	15,0		MI 8 X 1,5						3,54				
12	10	17,0		M20XU5	25,4	22	15	2,0	21	4,64				
14	12	19,0		22 1,5	27,7	24				5,10				
16	14	21,0		24 X1,5	31,2	27				5,65				
18	16	24,0		27 1,5	34,6	30				6,93				
20	18	27,0		M30x1,5	36,9	32	16	3,0	22	8,68				
22	20	29,0		1,5	41,6	36				11,30				
24	22			36 1,5						13,20				
25	23	32,0	2,0	39 1,5	47,3	41	17	4,0	25	12,90				
28	26	35,0		42 1,5						15,80				
30	28	35,5		45 1,5	53,1	46				17,40				
32	30	38,0		48 1,5						21,90				
34	32	38,0		38	57,7	50				24,40				
36	34	44,0		40	27,60									
38	36			42	28,90									

2. : 45, 12 18 9 ( 18 9 ), 13 11 2 2 (1 12 2 ).  
 3. — 16078—70.

D<sub>H</sub> 16

45:

16—022 16077—70

, 12 18 9 :

16—012 16077—70

, 13 11 2 2 :

16—011 16077—70

,

16—022 16077—70

16—012 16077—70

16—011 16077—70