

16587-71

Safety valves, control valves and pressure regulators.
Face-to-face lengths

MKC 23.060

110 27 1971
01.07.73


1.
16 320 / * 1 2 D_y 6 200 ,
64 / D_y 15 400 ,
200 .

16 / 2 D_y 25

3250—81

PC 2377—70.

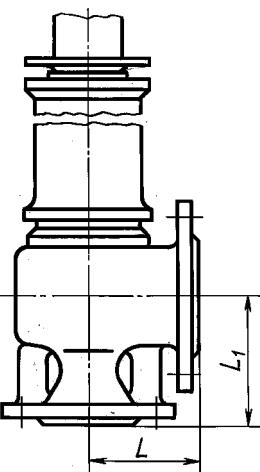).
(
2.
3).



Черт. 1

1, 2, 3 1978 1982 1983
(6-78, 2-83, 3-84).

Dy									
			, / ²						
	16 25	16 40		64, 100 160		16		40	
	<i>L</i>	<i>L</i>		<i>L</i>		<i>L</i>		<i>L</i>	
25	100	100	120	105	125	—	—	—	—
40	100	115	145	130	150	—	—	—	—
50	125	130	155, 140***	145	160	100	125	130	140
80	155	150	175, 150***	165	195	—	—	150	150
100	175	160, 135***	200, 180***	195*	225*	—	—	—	—
150	200	205	245, 230***	—	—	—	—	—	—
200	—	280**	320**	—	—	—	—	—	—

* 64 100 / ²** 16 / ²


(3. , . 2).

320 / ²

.2 .2.4

2

Dy			
		<i>L</i>	
6	15	70	75
10	25	100	100
15	32	120	110
25	40	155	135
32	50	170	150

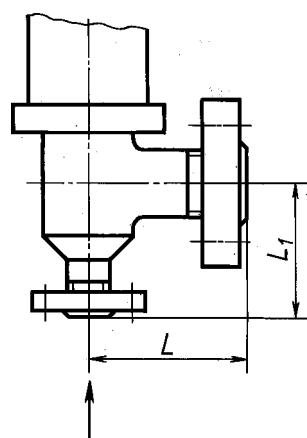


.2

4.

.3 .3.

.3

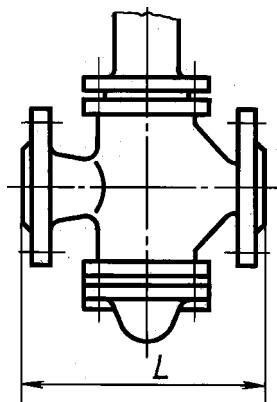16587-71



.3

Dy	L			Dy	L			
	, / ²				, / ²			
	16	40	64		16	40	64	
15	—	130	180	80	310	310	380	
20	—	150	190	100	350	350	430	
25	160	160	210	125	400	400	500	
32	180	180	240	150	480	480	550	
40	200	200	260	200	600	600	650	
50	230	230	300	250	—	730	780	
65	290	290	340	300	—	850	900	
				400	—	1100	—	



5.

,










.4.




4

L 1



64

L L_1 

Исполнение уплотнительных поверхностей фланцев	Строительные длины L и L_1	
	регулирующих клапанов и регуляторов давления	предохранительных клапанов
Под прокладку овального сечения		
Под линзовую прокладку	—	

5

6.

.5.

7.

200	$\pm 1,0$						
.200 300	$\pm 1,5$	320	/ 2 (. 2	. 2)	—	7-
» 300 » 400	$\pm 2,0$						
» 400 » 500	$\pm 2,5$		8.			—	254—76.
» 500 » 600	$\pm 3,0$		9.			—	356—80.
» 600 » 900	$\pm 3,5$		10.				
» 900 » 1200	$\pm 4,0$		12815—80	16	(160 / 2),		
			9399-81	32	(320 / 2).		
			(, . 2).		

16587-71

3250-81

4 6 16587-71
(, . 3).

2 3 3250-81.