



**17426—72**

17426—72

Metallic tubing for waveguides.  
General specification

11/1 1972 . 87


1/1 1975 .

153-^1.


## 1.

## 1.1.


- ( . 1)  $2:1;$
- ( . 2)  $2,5:1;$
- ( . 3);
- ( . 4);
- ( . 5);
- ( . 6).

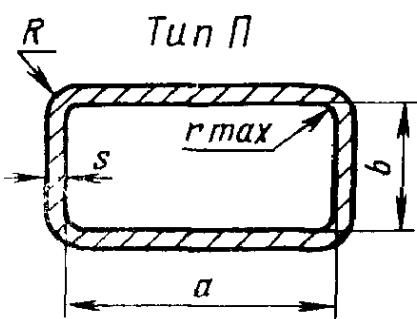


. 1

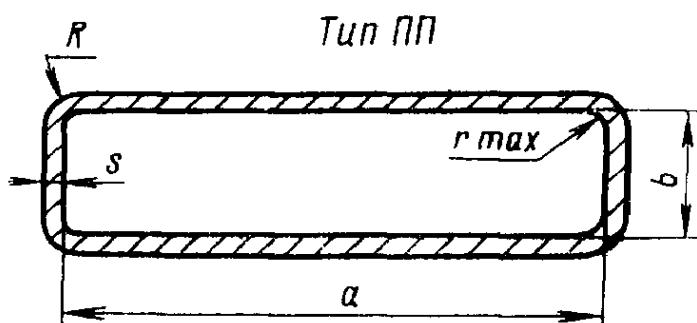


. 2

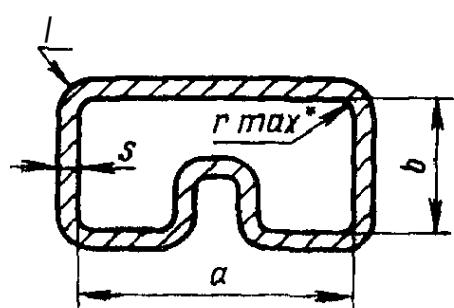


Черт. 3

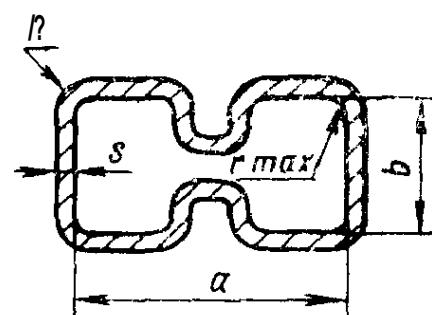

Черт. 4

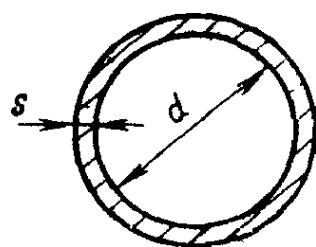

.5

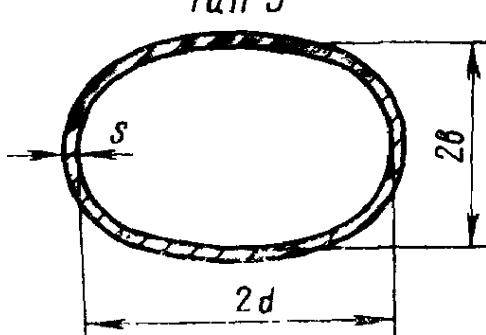

Черт. 6

1/500,  
1/1000.

1.2.

1/1500-

, 10-

2.

2.1.

2.4.  $(\quad, \quad)$ ,  $\quad$ ,  $(\quad, \quad)$ .

2.5.  10%  5%

2.6. ,  
0,009 ,  
10- 100 1  
100 .

, 50  
0,035 , 0,0175

2.7.

$\Delta \text{min} \sim 0,5\text{s}$ ,  
 $= \Delta t_{\text{uin}} "i 0" \gg 5\text{s}$ ,

i  $\Delta$   
2.8.

2.9.

3

3.

3.1.

3.2.

2.26, , , ; 2.4; 2.5 2.2 ; 2.3; 2.6; 2.7,  
5%,

3.3.

2%

3.4.

3.5.

( 12 ) ,

3.6.

3.3.

3.7.

4

4.

4.1.

$25 \pm 10^\circ$  ( $298 \pm 10$  );  
 $65 \pm 15\%$ ;  
 $750 \pm 30$  (100000 = 4000 /  $^2$ ).

24

4.2.

( . 2.2) ; ( 1 )  
),

 $\pm 2\%$ .

4.3.

( . 2.2 ; 2.7)

4.4.

( . 2.2 )

4.5.

<sup>TM</sup>

( . 2.2 )

1,1;

0; —0,1

1,1;

0; 4-0.1

 $3^*10^{-4}$ 

0,2

4.6.

2.3

4.7.

10356—63.

4.8.

( . 2.4)

10- 50-

4.9.

( . 2.5)

4.10. ( . 2.6)

1

4.11. 2.8

150 ,

5. , , ,

5.1.

; ;

5.2. 1908—66 30 -2

5.3. 5725—51 ,

5.4. 9569—65 80

8828—61. 5725—51.

5.5. ;

; ;

5.6. 58x25 2991—69.

5.7. 28,5 12,6 — 5 , — 10

5.8.

5.9. , ,

,

6.

6.1.

,

5

6.2.

19/1 1972 . . . . . 6/111 1972 . 0,625 , . . . 8000  
-22,  
, 256. . 90<sup>3</sup>