

18901-73

Steel wire ropes. Locked conveying wire rope with two layers
of Z-wire and type TK core. Dimensions


12 5100, 12 5200

01.01.75

1.

^

1+6+12 1+6+12+18.

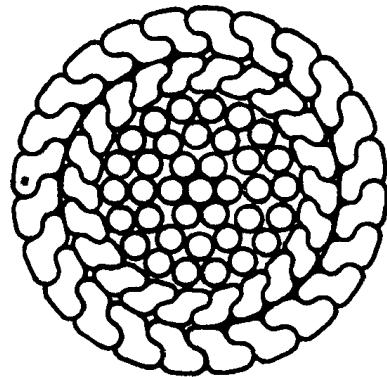

2.

								2	100	, / ^() , / ^(2) , / ^(2) ,						
		1-			2-											
		3	1	2	3	2	1			1	2	3	1	2		
38,5	3,3	19	5	1?	17,50	6	20	27,15	1003,01	858,15	1175 (120000)	1270 (130000)	1370 (140000)	1470 (150000)	1570 (160000)	
40,5	3,7	19	5	18	17,50	6	21	27,15	1089,44	931,89	1275 (130500)	1385 (141500)	1490 (152500)	1595 (163000)	1705 (174000)	
42,5	4,1	19	5	19	19,25	6	22	27,15	1213,89	1038,#	1425 (145500)	15# (157500)	1660 (169500)	1780 (182000)	1900 (194000)	
45,0	4,6	19	5	21	17,50	6	23	28,40	1336,#	1142,72	1565 (160000)	1700 (173500)	1830 (187000)	1960 (200000)	2090 (213500)	
47,0	3,6	37	5	22	19,25	6	25	27,15	1478,89	1264,56	1730 (177000)	1880 (192000)	2025 (207000)	2170 (221500)	2315 (236500)	
51,0	4,1	37	5	25	19,40	6	26	28,#	1711,89	1463,53	2005 (205000)	2180 (222500)	2345 (239500)	2510 (256500)	2680 (273500)	
54,0	4,3	37	6	20	30,60	6	26	30,80	1950,11	1667,91	2290 (234000)	2480 (253500)	2675 (273000)	2865 (292500)	3055 (312000)	

1. (, . 2).

2.

3.

, 1370 / ^(2) (140 / ^(2))

01.01.91.

45,0 , |,

1080 / ^(2) (110 / ^(2)):

(, , 1,2).

3. , , ,
— 1889.

1.

2.

15.06.73 1484

3.

4.

18899-73

3

5

(4-94)

6.

1989 .(6-85, 3-90) (1998 .) 1,2, 1985 ..