

80°


Rhombic throw-away (indexable) carbide shims
with 80° included angle.
Design and dimensions

19078—80

77.160
19 6000

01.01.82

(
1. . . . 1).

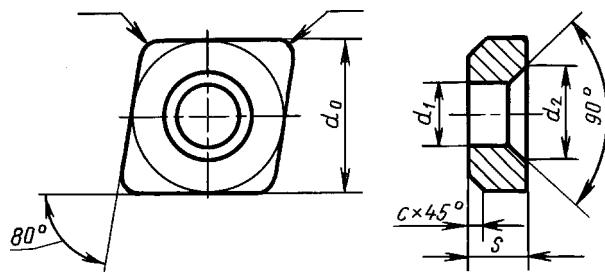

			<i>d_o</i>	<i>s</i>		4,	<i>d₂</i>		
731-0803	OCN-0803		8	7,7	3,18	0,4	3,18	5,5	0,5
731-0903	OCN-0903		9,7	9,3		3,81	6,5		2,15
731-1203	OCN-1203		12,9	12,5	4,76	1,2	5,16	8,5	0,8
731-1204	OCN-1204		16,1	15,6		1,6	6,35	10,5	3,15
731-1604	OCN-1604		19,3	18,8			7,93	12,5	5,80
731-1904	OCN-1904								8,53
									13,40
									19,30

(. . . . 1).

15, *s* = 3,18 , *I* = 8,1 :

19 6527 0432 0803

2. — 19042.
3. — 19086.

.2 19078—80

1.

2.

19.06.80 2912

3. 19078—73

4. -

,	
19042—80	2
19086—80	3

5. 29.12.90 3623

6. 1, 1990 .(4—91)