



2,5 (25 | ²)

19500—74, 19501—74, 11823—74

19500-741,6 (16 / cm^2)**Malleable iron checklift screwed and flanged valves
for $P_{\text{nom}} 1,6 \text{ MPa}$ (16 kgf/sq-cm)**11815—66,
11816—66,
11819—66,
11*820—66,
11822—66,
11560—65

13 1974 . 408

01.01.1976 .
01.01.1981 .

D_y 15, 20, 25, 32, 40 50 ()
 80, 100 150 ()
 1,6 D_y 25, 32, 40, 50, 65,

1. ,

1.1. . I.

1.2. ,

. 1.

1977 .

©

, 1977


/ a |

				»			,
	°	*		KIUHIIHJ.X	: 1 >		•
1	15. 20. 25. .12. 40. 50					.323	50
2	65. 80	1 ln	-		7:138—77		
3	15. 20. 25. 32. 40. 50	-				, 4 8	225
4	65. 80	-		0118 86 1412-70	-4 10007—72 -63. 59-1. 80-3 1 1 15527—70		
5	25. 32. 40. 50					323	50
6	65. 80. 100. 150	*			7338—77		
7	25. 32. 40. 50					, 498	225
8	65. 80. 100. 150	-			-4 10007—72 -6.3. 59 1. 80-3 15527-70		

1.3.
.1—4

.2.

1 3

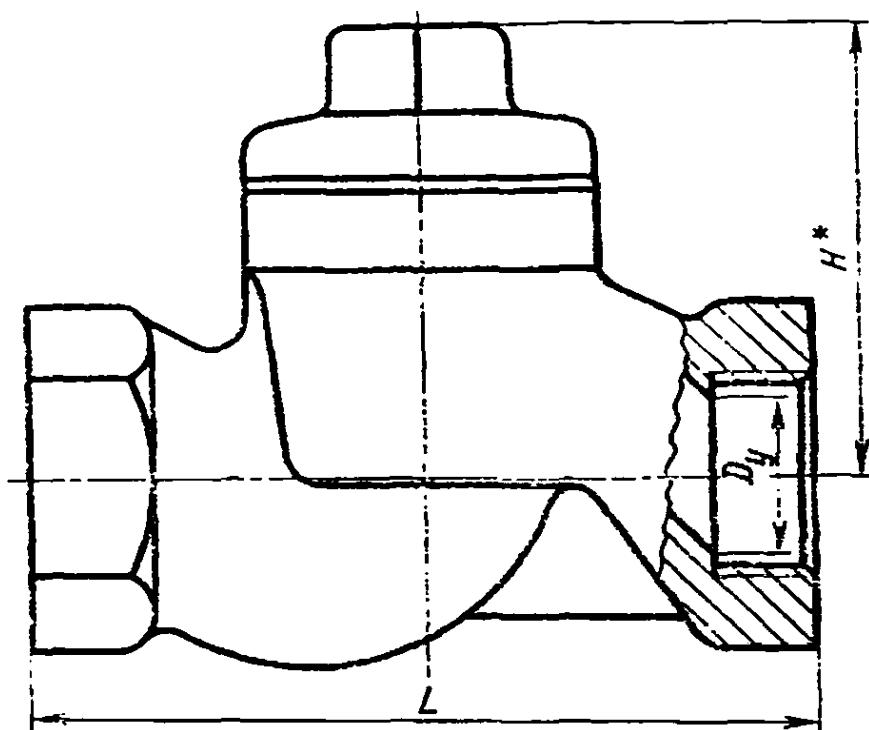


*

.1

.4

19500—74


2 4

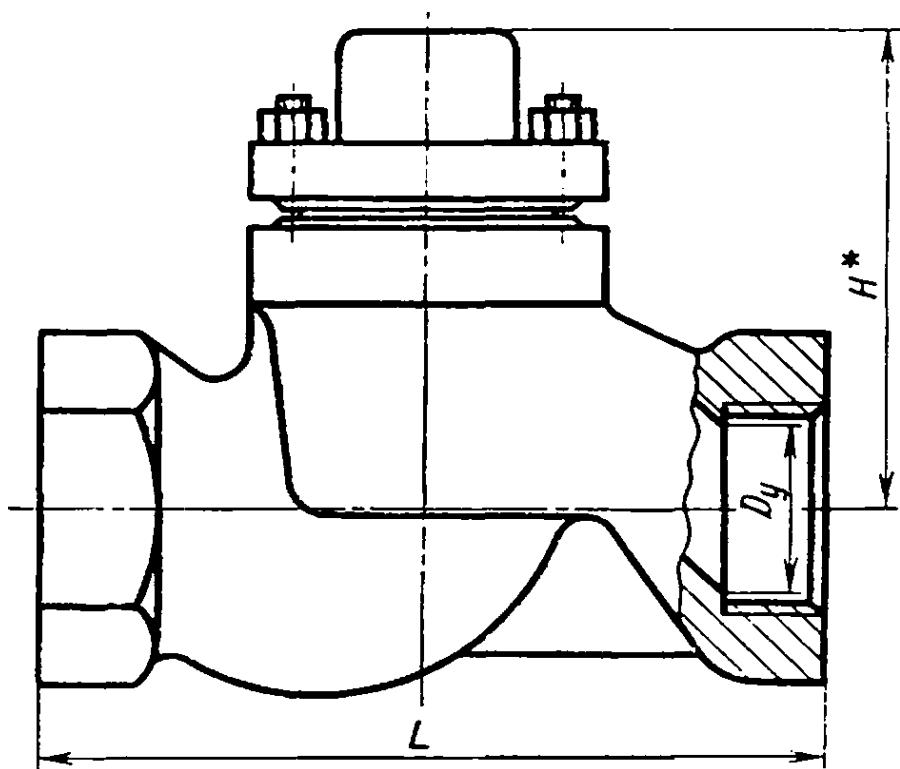


.2

4

5 7

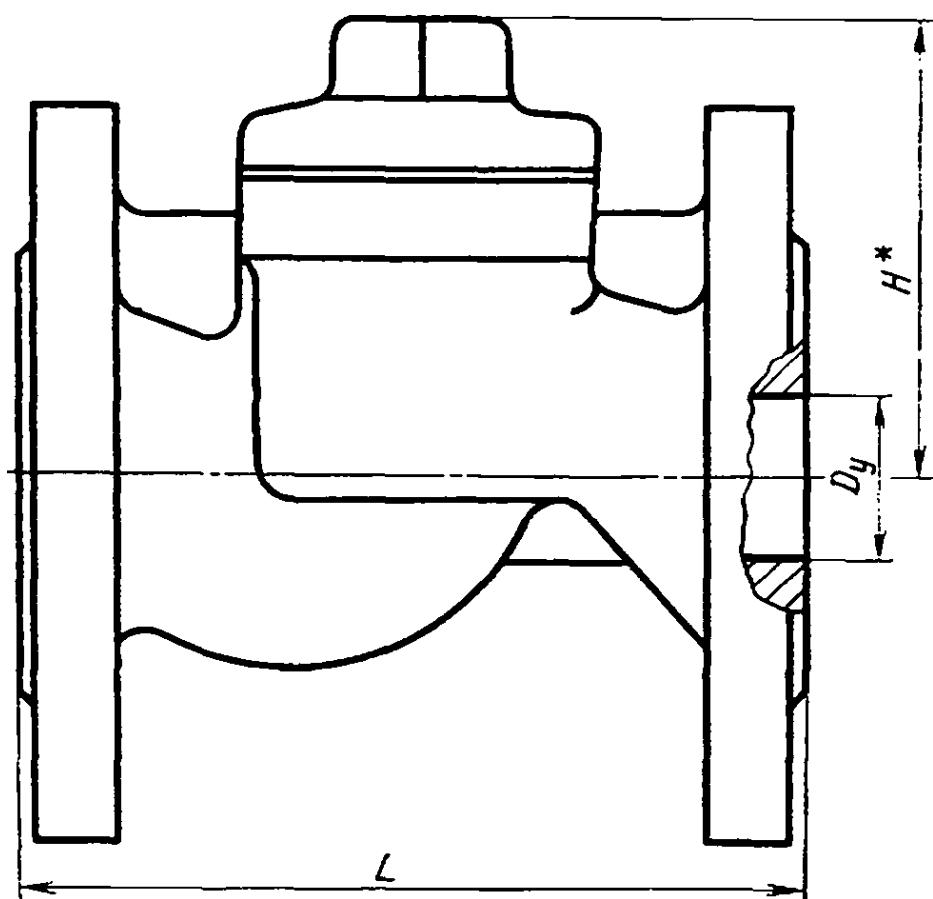

.3

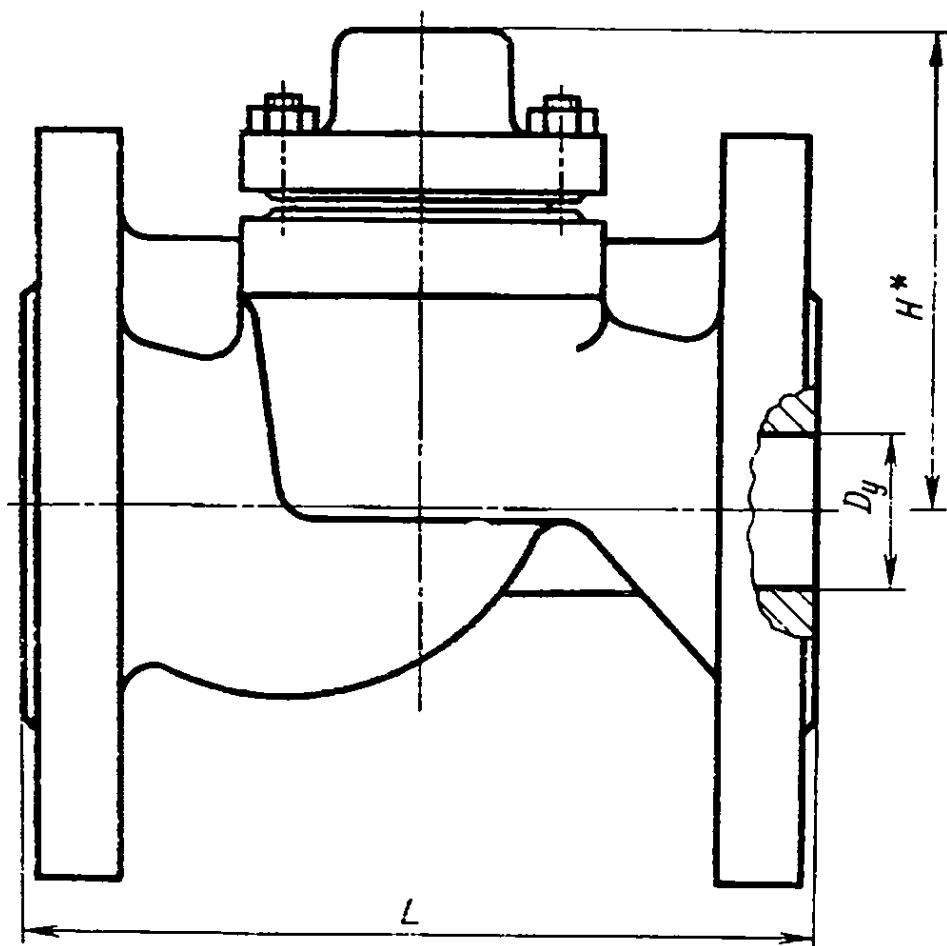Исполнения 6 и 8

*

.4

.1—4

2

		<i>L</i>		,
1 3	15	90	55	0.58
7 3	20	100	65	0.86
1 3	25	120	70	1.40
5 7				3.30
1 3	32	140	75	2.40
5 7				5.20
/ 3	40	170	95	3.50
5 7				7.00

. 2

		<i>L</i>		,
<i>1 3</i>	50	200	105	5,00
<i>5 7</i>				9,40
<i>2 4</i>	65	260	140	13,00
<i>6 8</i>		290		18,00
<i>2 4</i>	80	290	155	16,50
<i>6 8</i>		310		23,50
<i>6 8</i>	100	350	175	35,50
<i>6 8</i>	150	480	230	74,00

2.

2.1.

11823—74.

2.2.

$$\begin{array}{r}
 & & 5 & 5000 \\
 & - & - & \\
 - & & 1300 & .
 \end{array}$$

3.

3.1.

— 11823—74.

4.

4.1.

— 11823—74.

5.

, ,

5.

4666—75.

—

5.2.

11823—74. ,

—

6.

6.1.

—

6.2.

— 24

7338—77
7666—75

7338—65,
7666—65.

. 06.09.77. , d . 17.12.77. 1.25 . . 0.89 6000. 5 .
« » , , -22. , . 12/14. . 4159 » . 3.

	4	19500—74 1,6 (16 / 2)	17.01.83
212			<u>01.07.83</u>
10007—80.	1.2.	1. : : 10007—72	
	2.2	: «2>, 2.	
			(. . 96)

(19500
— 5000 5 .
— 5, 6, 7
8 — 5, 6, 7
6000 2 2.4: <2.4.
12.2.063—81».
(5 1983 .)