



20720-81

20720-81*

Cam disk couplings. Basic parameters. Overall and connecting dimensions

20720—75

41 7115

16

1981 . 1358

01.01.82

**1986 .
827**

28.03.86

01.01.90

1.

16

16000 -

4 -1

300

300 , 2 -1 —

30'

4

**1—3,
15150—69.
, . . 1).**

:

**(
2.
1 —**

12080—66;

**2 —
12081—72.**

1 2

**:
1—
2 —**

.

**(1986 .)
1986 . (7—86). I,**

©

, 1986

2—2801

. 2

20720—81

3.

,

4.

—

,

5.

23360—78

10748—79.

—

2—

6.
12081—72.

7.

8908—81.

(

, . . 1).

9.

3:
1
—

1,

250—32—I.1-

20720—81

,

1,


—2:

—
250—32—I.1—32—I.2—
20720—81


(

, . . 1).

1, 1 2

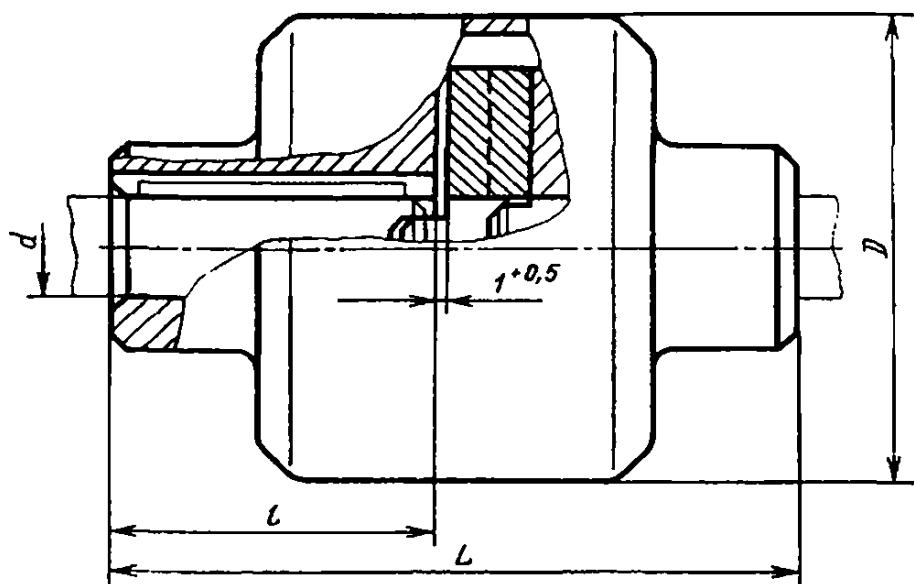

2, 1 2

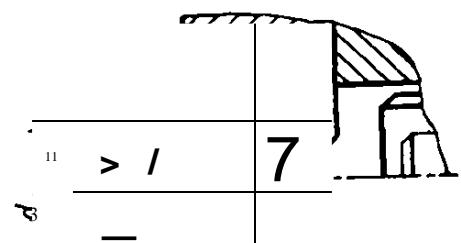

2*

	<i>d</i>	4	<i>d</i>	4	D.	<i>L</i> ,	1	<i>h</i>	W				
						<i>li</i>	<i>i</i>						
	? 9	? 119											
	1-	2-				1		3	4	3			
16,1)	16	—	100	—	—	75	—	28	—	18	0,6	1,38	
	18	—										1,36	
31,5	16	—	100	—	—	90	—	36	—	24	0,6	1,57	
	18	—										1,54	
	—	19										1,52	
	20	—										1,48	
	22	—										1,44	
	20	—										1,30	
63,0	22	—	100	—	—	105	—	42	—	26	1.0	1,28	
	—	24										1,24	
	25	—										1,29	
	28	—										1,22	
	25	—										6,30	
125	28	—	185	140	80	58	60	38				6,20	
	30	—										6,90	
	32	—										7,40	

	<i>d</i>	rf»	<i>d</i>	4i	<i>D.</i>	
• •	• •					
	7	9	7			
	1-		2-			
125	35		—		140	
	36		—			
250	32		—		170	
	35		—			
	36		—			
	—		38			
	40		—			
	—		42			
400	45		—		170	
	—		38			
	40		—			
	—		42			
	45		—			
	—		48			
	50		—			
	53					

»

<i>L,</i>							
<i>l; 2</i>	1	2				*	,
1	8	i	2	1	2		
185	140	80	58	60	38	1.0	7,20 7,10 10,90 10,65 10,60 10,40
245	190		82	84	56	1.6	.10 10,90 10,45
185	140	80	58	60	38		11,00
245	190		82	84	56	2.0	11,70 11,45 11,10 10,65 10,45 10,20

20720—41 . 5

<i>d</i>	<i>d₁</i>	<i>d</i>	<i>d₁</i>	<i>D</i> , не более
Пред. откл.				
H7	H9	H7	H9	
1-й ряд		2-й ряд		
		45	—	
		—	48	
		50	—	
		—	53	
		55	—	
		—	56	
		60	—	
		63	—	
		50	—	
		—	53	
		55	—	
		—	56	
		60	—	
		63	—	
		—	65	
		70	—	
630				
1000				
210				

<i>L,</i>	<i>I</i>	<i>l</i>					
<hr/>							
»...»							
<hr/>							
1	2	1	2	1			
245	190		82	84	56	2,0	31,00 30,50 31,70 29,60 29,00 28,80
305	235	140	105	107	72		31,20 30,55
245	190		82	84	56	2,6	31,70 29,60 29,00 28,80
305	235	140	105	107	72		31,20 30,55 30,15 28,90

	d		d	,	
			.	.	.
	7	>19	?	9	
	1-		2-		
1000	71				210
1600	60		—		250
	63		—		
	—		65		
	70		—		
	71		—		
	—		75		
	80		—		
	—		85		
2500	70		—		290
	71		—		
	—		75		
	80		—		
	—		85		
	00		—		
			95		

<i>L</i>		<i>I</i>				» , « .	2,6 3,0	28,65 48,75 47,46 48,35 47,20 47,00 39,90 42,00 41,25 53,38 52.95 51.95 56,60 55.70 52.95 51,00			
I: 2		1.		2							
I	2	1	2	1	2						
305	235	140	105	107	72						
360	280	170	130	132	92						
305	235		105	107	72						
360	280	170	130	132	92						

20729—«1

Номинальный крутящий момент M_{kp} , Н·м	d	d_1	d	d_1	D , не более	
	Пред. откл.					
	H7	H9	H17	H9		
		1-й ряд		2-й ряд		
2500	100	—	—	—	290	
	80	—	—	—	—	
	—	—	85	—	—	
	90	—	—	—	—	
4000	—	95	—	—	310	
	100	—	—	—	—	
	—	105	—	—	—	
	110	—	—	—	—	
6300	100	—	—	—	—	
	—	105	—	—	—	
	110	—	—	—	—	
	—	120	—	—	—	
	125	—	—	—	—	
	—	130	—	—	—	
	140	—	—	—	—	
	—	—	—	—	—	

<i>L,</i>		1		/			
1:	21	11		2		,	.
1	S	1	2	1	2		
440	350	210	165	167	122		55,28
360	280	170	130	132	92		56,60 55,70 52,95 51,00
440	350	210	165	167	122	3,6	55,30 53,28 52,28 125,48 123,46 121,40 115,45 112,20
550	450	250	200	202	152		122,50 114,20

. 1-
. (, . . 1),

Af. 4.