



21353—75

Latex films.
Method for determination of tear resistance

21353.75*

2509

15 1975 . 3896

01.01.77


1985 .

15.08.85 2670

01.01.91

1.

1.1.

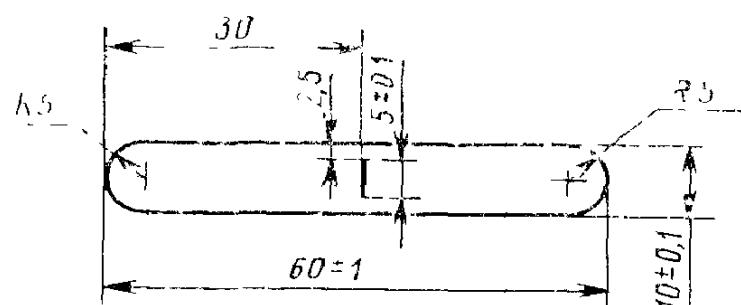

1.2.

(30±0,5)

(1986 .)
1985 . (II-85). 1,

©

, 1987

1.3.

2,0

1.4.

1.5.

1.6.

2.

2.1.

10 90%

1,0%

(500±50) / ;
 11358—74,
 0,78 1,96 (80—200). 0,01

3.

3.1.

269—66.

3.2.

30

6

3.3.

(15ih0,5)

0,5

4.4.1.
 $(27\pm2)^\circ$

20±2,

23±2

4.2.

0,01

4.3.

4.4.

5.

5.1.

$$(F) \quad / \quad (\quad / \quad)$$

$$F = \frac{P}{b}$$

5.2.

10%,

20

10%,

5.3.

15%.

5.2, 5.3. (

5.4.

)

)

)

)

)


)

)

)


. 4

21353—75

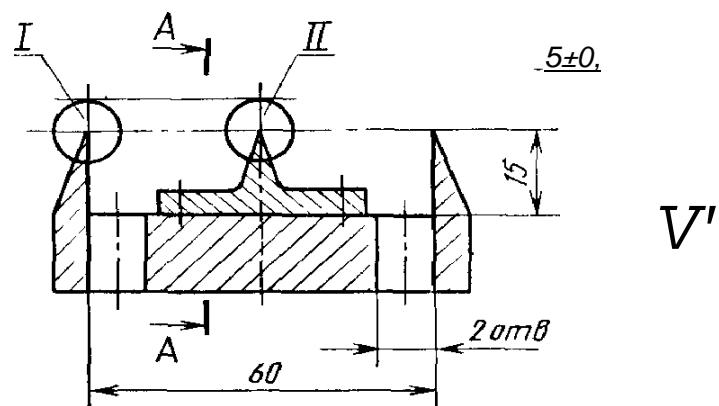

»

§3

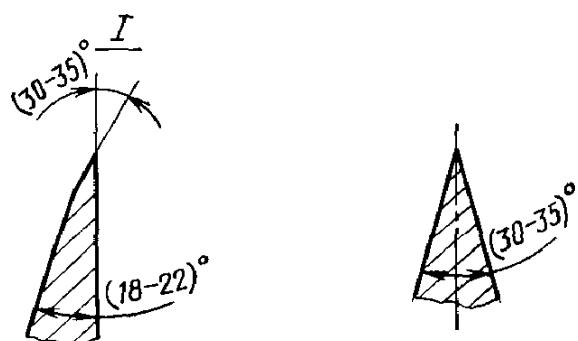

(, , 1).

04.11.86 , 26.12.86 0,5
6000 . . 0,5 . . 0,23 . .
« » , . 3. 123840,
. , . , 12/14. . 5127.