

21880-94

21880-94

1
()

2
() 17 1994 .

:

3 21880-86

1
() 15.05.96

:

4 1 1995 .
4 1994 . 18—6

5 (2002 .) 1, 1996 . (3—97)

© , 1995
© , 2002

,

II

Thermoinsulating mineral wool broached mats. Specifications

1995—01—01

1

(—) (—),

700 ° . , 180
 3.1, 4.1, 4.2.1—4.2.5, 5—8,
 (, . 1).

2**3**

3.1 75, 100, 125.

3.2 , 1.

1

		, (°)
MI, 1 2, 2 3, 4, 4 5, 5	,	973 (700) 973 (700) 723 (450) 353 (80) 333 (60)

(, . 1).

3.3

2.

2

	1000 6000 500, 1000 40, 50, 60, 70, 80, 100, 120	500 +30; -20 ±20 +5; -4

1
2

3.4

, , , , 1 — , , ,

MI, 100, 1000, 500, 60 , : MI-100-1000.500.60 21880-94

, 2, 125, 1000, 500, 60 , : 2-125-1000.500.60-2 21880-94

60 , : 1, 100, 1000, 500, : 1-100-1000.500.60 21880-94

60 , : 2, 125, 1000, 500, : 2-125-1000.500.60-2 21880-94

(, . 1).

4

4.1

4.2

4.2.1

, — , , (, . 1). —

2

4.2.2

3.

3

,	100 120 70 170
—	,

4.2.3

10 %

4.2.4

4.

4

	75	100	125
, / (298±5)	85 0,046	. 85 110 0,044	. 110 135 0,044
, /((398±5)	—	0,065	0,064
, : (573±5)	—	0,150	0,130
, %>, , %, , %	55 70 80 2	40 75 100 2	30 80 120 2
, % , %	2	2	2

1
2

(573±5)

MII 2.

4

5.

	75	100	125
(298±5)	0,048	0,048	0,048
(398±5)	—	0,078	0,076
(573±5)	—	0,185	0,150
, %,	30	25	20
, %,	70	80	90

(4.2.5 , , . 1).

40° , 1,5 / 3 (0,4 2/3).

4.3

4.3.1

4640.

4.3.2

4.4

4.4.1

25880

4.4.2

15846.

4.4.3

24597.

().

4.4.4

9078

22831

-0,5 ,

9570,

26381

:

4.4.5

3282,

3560,

6009

503,

-5

13843,

25951,

20477,

,

,

4.4.6

25880

4.4.7

» 14192.

«

« »

12.4.028,

66.1
6.2
6.3
,

6.4

6.5

6.6

26281

()

26281

77.1
17177.

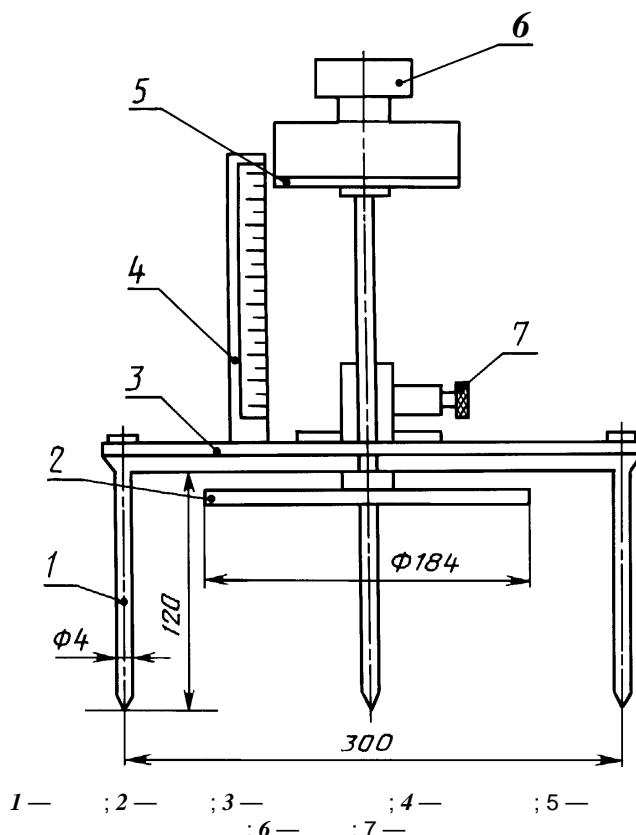
7.2

427

7.3
7076

7.4

7.4.1

(1).
7.4.21
 (150 ± 10)
1

200

1 —

$$\begin{array}{ccccccccc}
 & 2 & & 1, & & 2 & & & 7. \\
 & & & & & & & , & \\
 7 & & & & & & & & 3. \\
 & (500\pm 5) & . & 5 & & & 0 & & 4 \\
 & 5. & & & & & & 5 & \\
 () & 6, & & & & 2 & & (2000\pm 20) & . \\
 5 & & & & & & & , & \\
 2 & 4 & & . & 7. & 15 & & & (500\pm 5) \\
 & & & & & & & & \\
 & 2. & & & & & & & \\
 7.4.3 & () & & & & & & &
 \end{array}$$

$$= \text{H}_\infty^{\circ} \text{--HI} \quad 100, \quad (1)$$

$$\frac{1}{\sqrt{-}} \quad () \quad (500 \pm 5) \quad , \quad ; \\ \quad (2000 \pm 20) \quad ,$$

$$\equiv 1 \quad . \quad (2)$$

$$_2 - \quad \quad \quad (500 \pm 5) \quad , \\ (2000 \pm 20) \quad , \quad .$$

7.5
7.5.1

20 /
1%

40 100 ,
352 427.

(100±3) , , , , (600±10) ,
 50 , , , , 100—150

7.5.3

7.6 , , , [1] ().

[2] ().

8.1
25880
8.2
2 .
8.3 —
8.4 — 12
8.5

()

12.4.028—76 — 1 « ».

427—75

503—81

3282—74

3560—73

4640—93

6009—74

7076—99

9078—84

9570—84

13843—78

14192—96

15846—79

17177—94

20477—86

22831—77

3,2

1200 x 1600

1200 1800

24597—81

25880—83

25951-83

26281-84

26381-84

()

,

20—0,5, 25—0,6 12-1,2, 10-1,0 25-0,6, 12,5-0,5 - - -150 ,	13603-89 5336-80 3826-82 14-4-907-78 14-4-1191-82 14-198-91-81 14-4-714-76 19170-2001 6-11-231-76 6-11-118-75 6-19-368-87 6-11-454-77 6-11-196-76 6-11-523-82 6-11-570-83 6-11-99-75 6-11-381-81 7376-89 7933-89 — 2228-81 8828-89 8273-75 7377-85 13-0248643-798-89 62-11262-86

()

,

0,5—1,0 , -6, -6	3282-74 29231-91 17308-88 8325-93 6-11-594-84 6-48-23-89

()

- [1] 1492—76 «
»,. 1976 .
[2] «
»,. 1980 .

21880-94

662.998:666.189.2:006.354

91.100.60

15

5762

02354 14.07.2000. 26.12.2002. . . . 1,40. - . . 1,10

3388. . 13.

, 107076, , ., 14.
<http://www.standards.ru> e-mail: info@standards.ru