



**23250-78**

\*

, . . . ( ); . . .

14

**1978 . 130**

Building materials. Method of  
specific heat determination

**23250—78**

14      1978 . Ns 130

01.01. 1979 .

20      100° .

1.

1.1.

1° ,

1.2. / ( - ° )

/ ( - ) .

1.3.

1.4.

1.5.

1°

1.6.

©

, 1979

1.7.

$20 \pm 2^\circ$

2.

2.1.

1,

:

250

37—45

3—5  
0,7

70

15—20

500—1000

,

;

;

$5^\circ$

$0,01^\circ$

$0,01^\circ$  ;

( 2).

25—27

3

859—78

3

2

25


;

0,2—0,3

1790—77


;

22261—76,

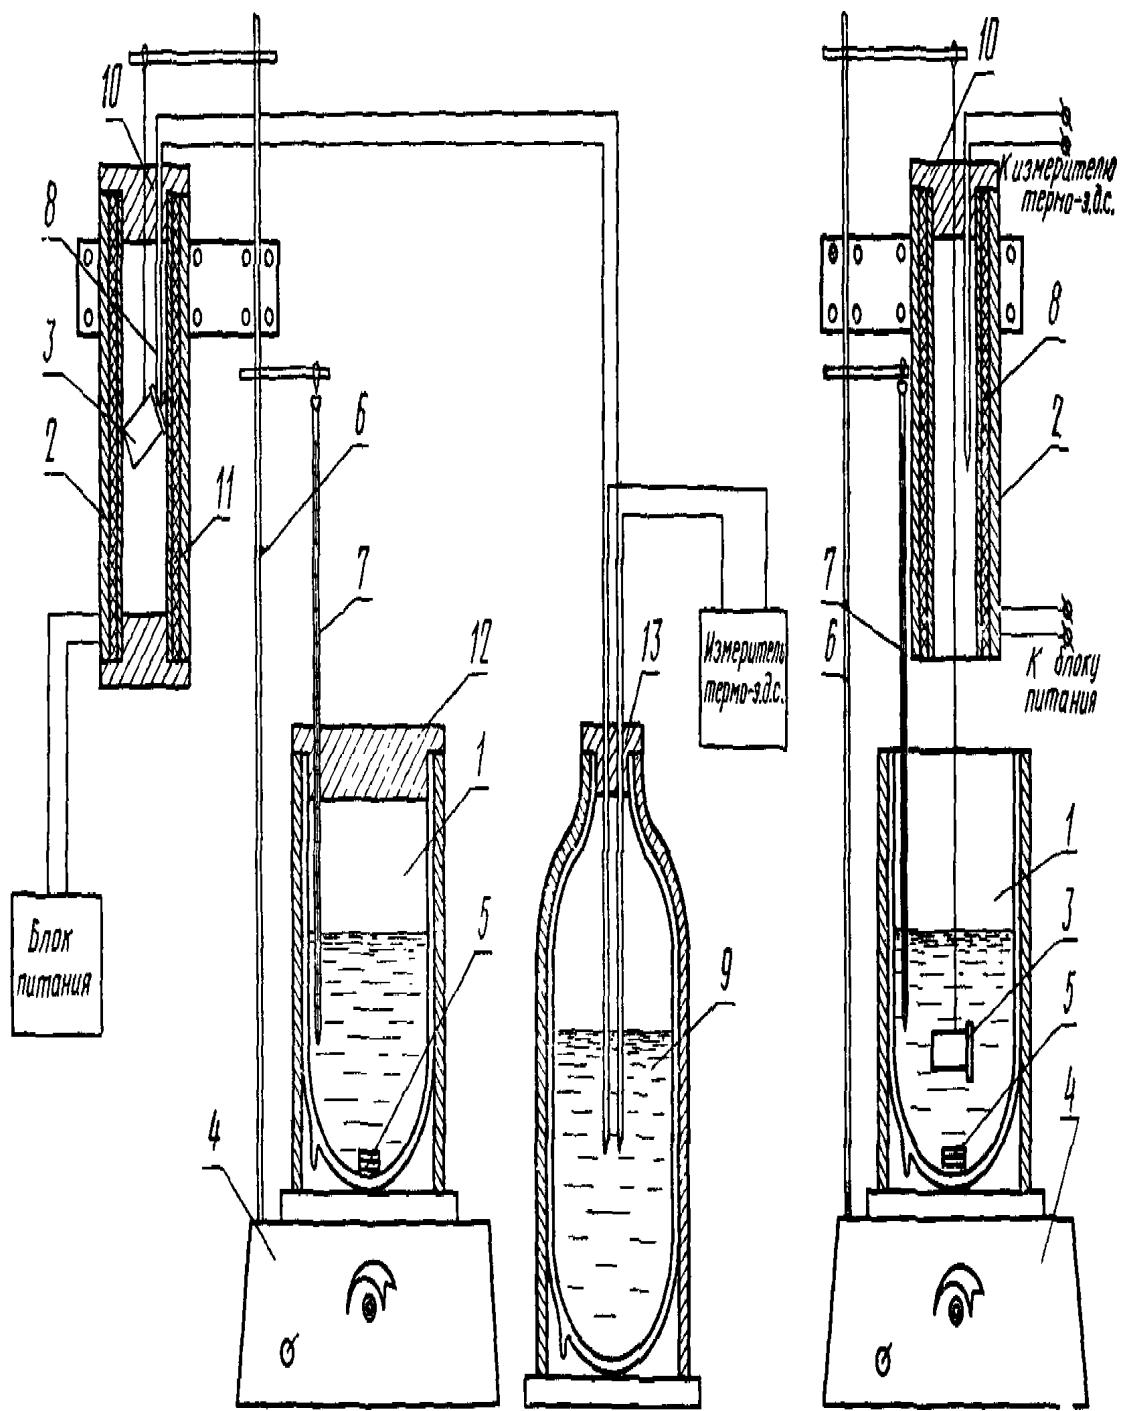

S/-OS7C7

1- ; 2- ; 3- ; 4- ; 5-  
; 5- ; 6- ; 7- ; 8- ; 9-  
; 10- ( ) ; 11- ; 12- ; 13- .

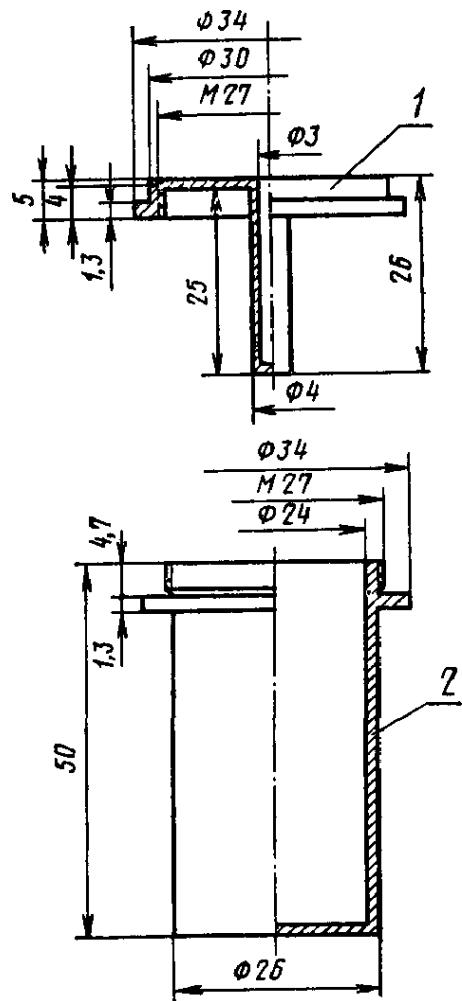

1—

; 2—

.2

0,15° ;

1

;

;

-1—2

1 ,

5072—72

2.2.

, . 2.1.

3.

3.1.

3.1.1.

3.1.2.

5

3.1.3.

0,001

5

3.2.

3.2.1.

3.2.2—3.2.5.

3.2.2.

3.2.3.

1°

3.2.4.

15—25

2

 $t_n$ 

£

3.2.5.

5

0,15°

3.3.

3.3.1.

±1°

±3°

3.3.2.

· 4 5,

3.4.



4.7.

1

20

10

4.8.

0,005 ,

5.

5.1.


100

, 1

5

1°

( . . . 3).

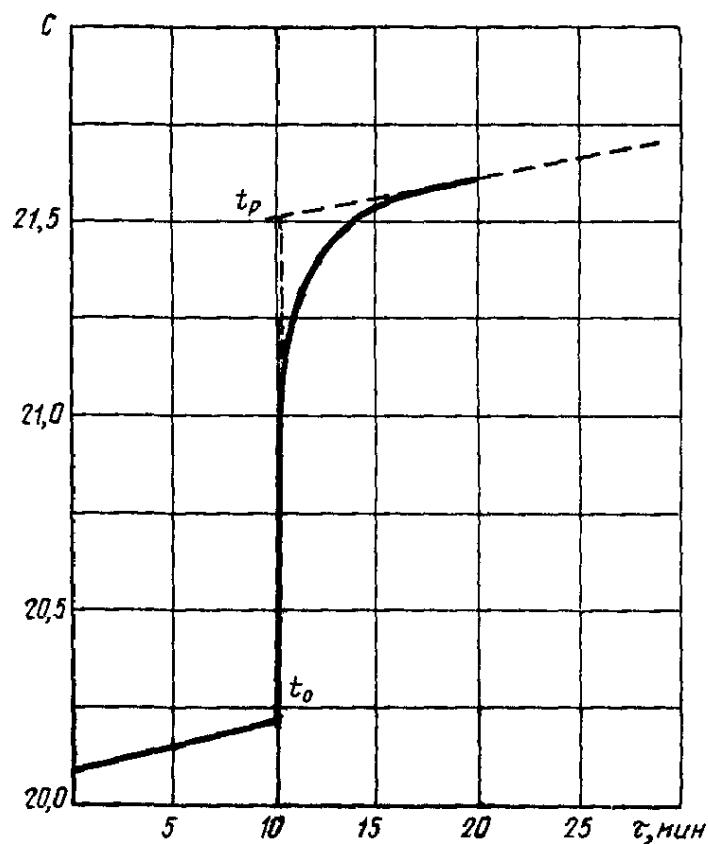

Черт. 3

5.2.

 $t_0,$

$f_p$ ,

5.3.

0,1

$$\begin{aligned}
 & (1 -^{\wedge} ) \\
 = & (* -^* ) \\
 - & , ; \\
 - & , , I( -^{\circ} ) \\
 I( -^{\bullet} ); & , ^{\circ} ; , ^{\circ} ; \\
 I( -^{\circ} ) & , , \\
 1 & , , \\
 to & , , \\
 & , , \\
 10 & I( -^{\circ} ) \quad 4187 \quad I( -^{\circ} );
 \end{aligned}$$

5.4.

0,01  $I( -^{\circ} )$ 

$$Q - \frac{(tp----I)}{[W]} jyj Q$$

$$\begin{aligned}
 t_B - & , ^{\circ} ; \\
 - & , , I( -^{*o} ) \\
 I( -^* ); & , \\
 0 - & , ,
 \end{aligned}$$

5.6.

 $(I -^{\wedge} >)$ 

$$\begin{aligned}
 5.7. \quad & , \\
 (t_B -^{\wedge} ) & . \\
 5.8. \quad & 5\%.
 \end{aligned}$$

23.11.78 . . 18.01.79 0,75 . . 0,49 . . . . 20000 3 .  
 « » . . , -557, . . 6. . 1638 . . 3.