

24073-80

Reduce tube connections with cut ring.
Construction and basic dimensions

15765—70
21839—76

8


1980 . 1586

01.07. 1981 .
01.07. 1991 .

3.

393 (120°).
2.

233 (40°)

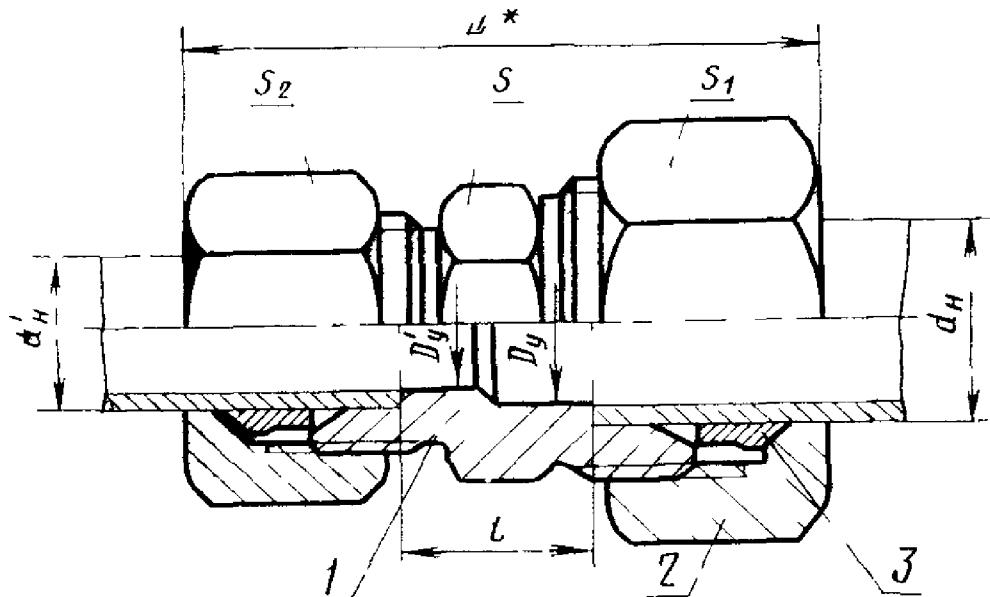

*

1 — 21857—78;
23353—78; 3 — 2 — 23354 — 78

	-		L	1	"			1000 ,	
					S	Si	s ₂		
1	5	4	3x2,5	33	10,5	12	12	10	34
	6	5	4X3	34	9,5		12		35
	8	6	6X4	36	10,5		14		45
2	8	6	6X4	41	11,0	14	17	14	60
	10	8	8x6	43	13,0	17	19	17	75
	12	10	10x8	46	14,0	19	22	19	100
	16		12x8	48		24	30		160
	12	12X10		14,5	22		170		
	18	16	15X12	51	16,0	27	32	30	235
	22	18	20X15	53	20,0	32	36	32	240
	28	22	25X20	58	21,0	41	41	36	380
	34	28	32X25	66	23,0	46	50	41	460
3	42	34	40X32	69	21,5	55	60	50	770
	10	6	5X3	50	17,5	19	22	17	115
	12	8	6x4	52	19,5	22	24	19	125
	14	12	8x6	58	20,5	24	27	24	180
	16	14	10X8	62	21,5	27	30	27	230
	20		12x8	66	23,5	32	36		295
	16	12X10			23,0		30	335	
	25	20	15 12	74	25,5	41	46	36	535
	30	25	20X15	81	26,5	46	50	46	790
	1 38	30	25X20	91	29,5	55	60	50	1145

L

1 =8 =6 :

1 8x6

24073—80

3.

22525—77,

1.

4.

,

,

15763—75.

26.10.89 3203

01.07.90

«and basic dimensions».

1 : «1. 41 9300.
2. 24°. : d_H D_H ; d_H / D_H ; 12 8 12, 15X12, 32X25,
40X32 (2) : (. . 140)

» £—	.		D	L	1	* "			1000 .,	
						S		S ₂		
2	15	10	12x8	48	15,0	22	27	19	114	
	(16)				14,5	24	30		133	
	15	12	12X10		15,0	22	27	22	126	
	(16)				14,5	24	30		143	
	18	15	15X12	51	16,5	27	32	27	187	
	18	(16)			16,0			30	203	
	(34)	28	32x25	66	23,0	46	50	41	517	
	35								509	
	42	(34)	40X32	69	21,5	55	60	50	763	
	42	35							757	

24, 45 « 1000 1000 19, 35
 27, 60 46, 75 64, 100 ». 34 19, 35
 10.8, 125 120, 1:80 173, 230 224, 295 290 268, 335 380 330, 535 353, 115
 790 817, 1145 1158; 317, 335 330 535 593,

— 2: «2.

».

(2 1990 .)