

24075-80

Elbow passage tube with cut ring.
Construction and basic dimensions

15767—70
21841—76

1980 . 1586


8

01.07. 1981 .
01.07. 1991 .

1.

40°) 393 (120°).
2.

, 233 (

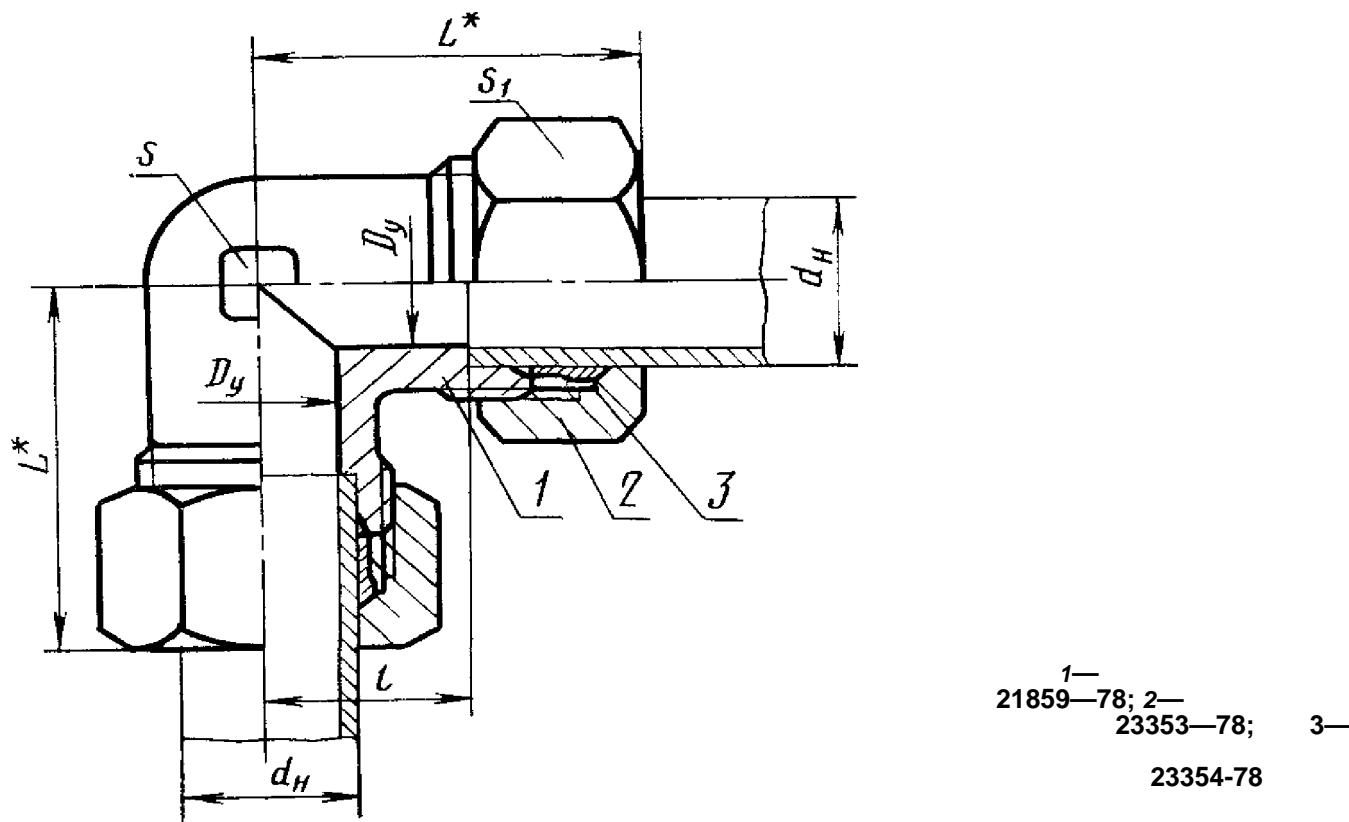

*

	<i>d</i>	<i>D</i>	<i>L</i>	<i>t</i>	"	*	1000 ,
					S	5	
1	4	2,5	21	11,0	7	10	23
	5	3,0	22	9,5	9	12	29
	6	4,0					31
	8	6,0	23	11,5	12	14	36
2	6	4,0	27	12,0			41
	8	6,0	29	14,0		17	61
	10	8,0	31	15,0	14	19	79
	12	10,0	33	17,0	17	22	105
	16	12,0	38	20,5	24	30	226
	18	15,0	40	23,5		32	242
	22	20,0	45	27,5		36	352
	28	25,0	40	30,5	36	41	457
	34	32,0	«8	34,5	41	50	784
	42	40,0	04	40,0	50	60	1154
3	6	3,0	31	16,0	12	17	75
	8	4,0	32	17,0"	14	19	106
	10	5,0	35	17,5	17	22	131
	12	6,0	39	21,5		24	t57
	(4	8,0	42	22,0	19	27	2
	16	10,0	45	24,5	24	30	271
	20	12,0	50	26,5	27	36	321
	25	15,0	55	30,0	36	46	803
	30	20,0	64	35,5	41	'50	1040
	38	120,0	174	41,0	50	6	1655

L

1 =6 :

1—6 24075—80

3.

22525—77,

1.

4.

,

,

,

15763—75.

—

(26.10.89 3203

01.07.90

«and basic dimensions».

: « 41 930'0.

1

: «1.

2'4°».

2.

(

2)

: d_H D_H ; 12,0 32,0

: (. . . 142)

(

24075-80)

	<i>I></i>	^{Dy}	<i>L</i>	<i>t</i>	“	**	1000 ., ,
					S	S,	
2	15	12,0	38	21,0	19	27	179
	(16)			20,5	24	30	236
	(34)	32,0	58	34,5	41	50	789
	35						774

45, 61 « 1 000 1000 .., , 277, 106 » .
 1655 66, 105 106, 282 91 321 : 31 30, 41
 1657; — 2: «2. , » .
 » .

(2 1990 .)