

24086-80

**Tee passage tube connections with cut ring the end
for connection sleeve.**
Construction and basic dimensions

8

1980 . 1588


01.07 1981 .

01.07 1991 .

1.

233 (40°) 393 (120°).

2.

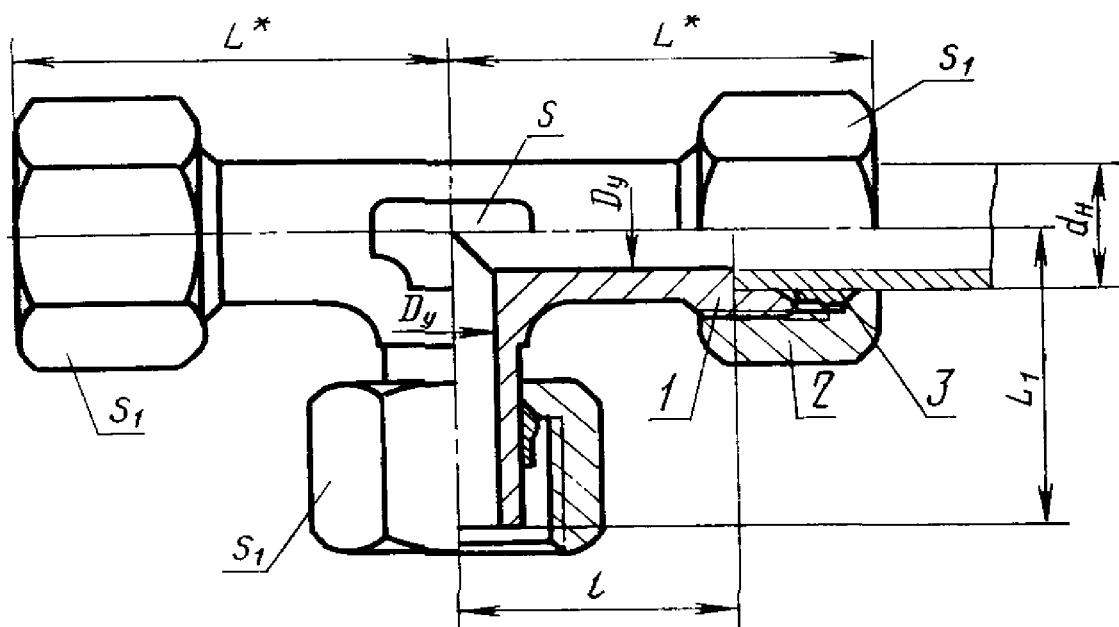

*

1—

24094-80; 2—

3—

23353-78;
23354-78

-			L	L _t	1	,,		1000 ,,
						5		
2	6	4	27	26,0	12,0	12	14	72
	8	6	29	27,0	14,0		17	104
	10	8	31	28,5	15,0	14	19	138
	12	10	33	29,0	17,0	17	22	174
	16	12	38	33,0	20,5	24	30	362
	18	15	40	35,0	23,5		32	444
	22	20	45	38,0	27,5	27	36	568
	28	25	49	41,5	30,5 1	36	4!	715
	34	32	58	51 ;0	34,5	41	50	1213
	42	40	64	56,0	40,0	50	60	1728
3	6	3	31	27,0	16,0	12	17	119
	8	4	32		17,0	14	19	146
	10	5	35	29,5	17,5	17	22	202
	12	6	39	30,5	21,5		24	249
	14	8	42	34,5	22,0	19	27	344
	16	10	45	36,0	24,5	24	30	414
	20	12	50	44,0	26,5	27	36	700
	25	15	55	49,5	30,0	36	46	1256
	30	20	64	55,0	35,5	41	50	1617
	38	25	74	63,0	41,0	50	60	2654

L

2 d_H = 8

2—8 24086—80

3.

22525—77,

1.

4.

,

,

, 15763—75.

26 10.69 3203

01.07.90

«and basic dimensions»;

».

1

41 9300.

«1.

24°

».

2.

(2)

 d_H D_H ; 12 32

(. . 146)

143

	D	D	L		1			*	1000	„
						S	S _t			
2	15	12	38	32,0	21,0	19	27	257		
	(16)			33,0	20,5	24	30	301		
	(34)	32	58	51,0	34,5	41	50	1062		
	35							1069		

138 « 1000 „, „, „. : 72 65, 104
 119 114, 174 149, 444 354, 568 490, 715 636, 1728 1460,
 1256 110, 146 137, 202 192, 249 239, 344 338, 414 402, 700 652,
 1141, 1617 1504, 2654 2247; — 2: «2. ,
 „.

(2 1990 .)