



24243—90

(1049-89)

4S9/06-8 £3

“ * SI

24243—90

Positive-displacement hydraulic drives.
Filter elements.
Overall and mounting dimensions



(CT 1049—89)

41 4550, 41 5300

01.07.91

1.

1 —
2 —
2.

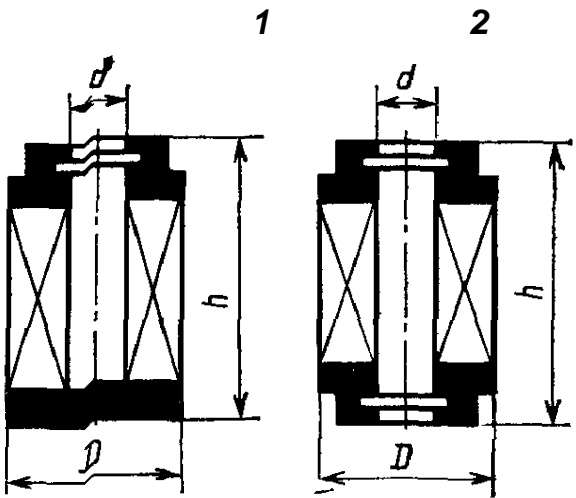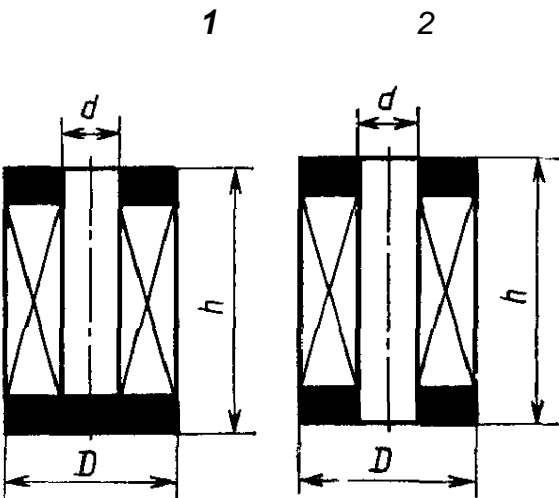

©

, 1991

I*11

D.	<i>h,</i>										
	63	100	125	160	200	250	315	400	630	800	1000*
	<i>d</i>										
40	12 20	12 20	12 20	12 20	12 20	—	1 —	r''	—	—	—
50	24 —	24 28	24 28	24 28	24 28	24 28	24 28	—	—	—	*—
60	24	24 34	24 34	24 34	24 34	24 34	34	—	—	—	—
70	—	34 —	34 —	34	34 38	34 38	34 38	1—	—	—	—
80	—	43 48	43 48	43 48	43 48	43 48	43 48	43 48	—	—	—
95	—	43 48	43 48	43 48	43 48	43 48	43 48 56	43 48 66	56	f • 56	56
125	—	—	—	—	60	60	60	60	60	60	63
150	—	*—	—	—	82 88 105	82 88 305	82 88 105	82 88 105	82 88 105	88 105	88 105
250	—	—	—	—	—	—	—	160 i—	160 18	160 180	3 60 180

1.

 $d:$
 — 12, —

2.

®

. 3 24243—90

1. -

· , , · · , , · ,
· ·

2. -
20.12.90 3213
1049—89 -
01.07.91

3. — 1996 .

4. — 5

5. 24243—80

· ·
· ·
· ·

9000 · 22.01.91 · 12.03.91 0,25 · · 0,25 · · , 0 0 · 15 · ·
« » , 123597, , 6. · 57 ·, 3
· « »