



24485-80 — 24489-80, 24492-80,
24493—80, 24499—80,
24502-80 — 24504-80

24485—80				-	
24486—80 3	
24487—80	.			-	6
24488—80		.		-	9
24489—80	.				13
24492—80		.		-	16
24493—80		.		-	19
24499—80		.		-	22
24502—80		.		-	29
24503—80	29
24504—80	.		.	-	34
			.	.	. 37

, 26.03.92. , < 27.07.92. . . . 2,5. . . - . 2,6. . - . . 2,1

1651

«

»

, 123557,

.. 3.

, 256. . 1335


Passage tube connections with ball nipple.
Construction

24485—80

41 9300

01.01.1982
01.01.2000

1.
- 24°.
2.
-

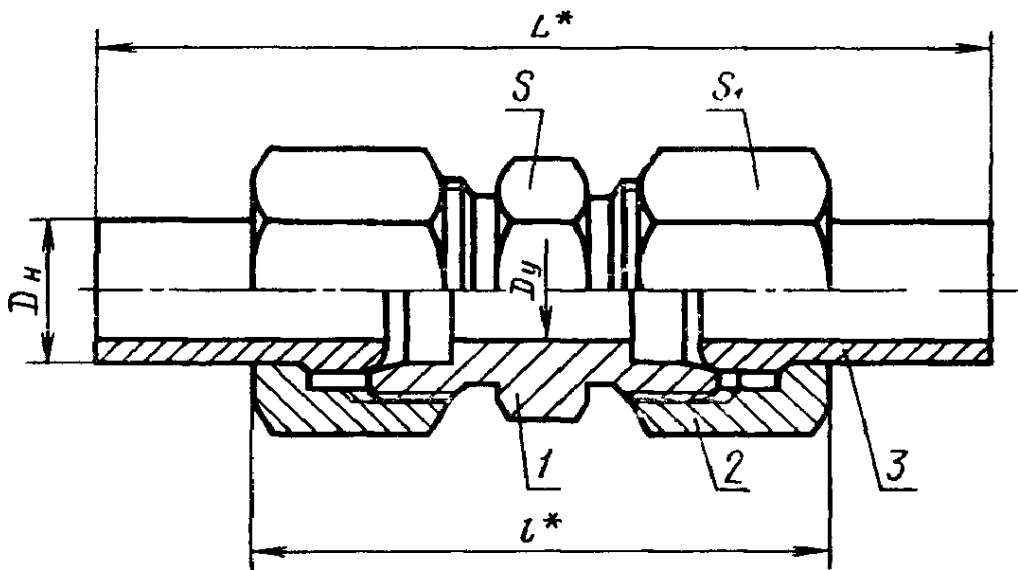

1*

1 — 23353—78; 3 — 21856—78; 2 — 23355—78



, 1980
, 1992

	D _H	°	L	1	«		1000 ,
					S	Si	
1	F						
	4	25	69	32	9	10	19
	5	3.0			12	12	28
2	6	4,0	78	42	12	14	43
	8	6,0	83	43	14	17	68
	10	8,0	89	45	17	19	90
	12	10,0	94	46	19	22	125
	15	12,0	100	49	22	27	158
	(161				24	30	243
	18	15,0	104	52	27	32	272
	22	20,0	108	59	32	36	382
	28	25,0		62	41	41	514
	(34)	32.0	122	69	46	50	774
	35						764
	42	40 0	123	71	55	60	1159
3	6	3.0	84	48	14	17	73
	8	4.0	90	50	17	19	101
	10	5,0	94	52	19	22	143
	12	6,0	100	54	22	24	184
	14	8,0	108	60	24	27	249
	16	.			27	30	298
	26	12.0	118	72	32	36	480
	25	15,0	127	79	41	46	858
	30	20.0	131	85	46	50	1141
	38	25,0	142	96	55	60	1745

=5 : 1 £>,, =

1—5 24485—80
1, 2. (, . 1).

3. -

4. 1 22525—77.

, , -

, -

15763—91.

1.

. . ; . . , . . ; . . -

2.

-
30.12.80

6078

3. — 1998 .

4. 20969—75; 22872—77

5. - -

15763—91
21856—78
22525—77
23353—78
23355—784
2
3
2
2

6. 1989 . 25.10.89 3180 01.01.2000 -

7. (1991 .)
1989 . (2—90) 1,