

24499—80

Cross passage tube connections with ball nipple.
Construction

41 9300


01.01.1982

01.01.2000

1.

24°.

2.

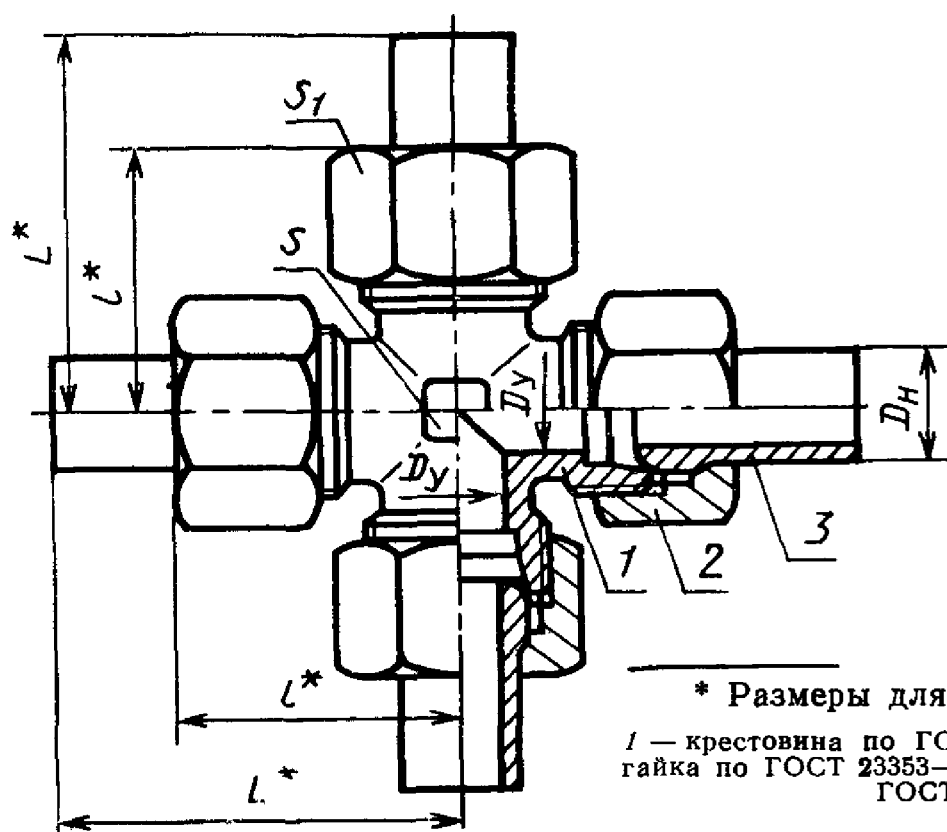

* Размеры для справок

1 — крестовина по ГОСТ 21869—78; 2 — накидная гайка по ГОСТ 23353—78; 3 — шаровый ниппель по ГОСТ 23355—78

Издание официальное

		°	<i>L</i>	1	« »		1000 ,
					S	Si	
1	4	2,5	40	21	7	10	37
	5	3,0			9	12	51
2	6	4,0	46	28	12	14	97
	3	6,0	50	30		17	149
	10	8,0	53	31	14	19	195
	12	10,0	57	33	17	22	278
	15	12,0	63	37	19	27	461
	(16)				24	32	541
	18	15,0	67	41			611
	22	20,0	71	47	27	36	824
	28	25,0	76	51	36	41	1137
	(34)	32,0	85	59	41	50	1692
	35						1700
	42	40,0	91	65	50	60	2485
3	6	3,0	50	32	12	17	159
	8	4,0	53	33	14	19	202
	10	5,0	56	35	17	22	298
	12	6,0	62	39		24	373
	14	8,0	65	41	19	27	540
	16	10,0	68	44	24	30	609
	20	12,0	74	51	27	36	949
	25	15,0	80	56	36	46	1688
	30	20,0	87	64	41	50	2334
	38	25,0	97	75	50	60	3588

1 $D_H = 5$:

1—5 24499—80

1, 2. (, . 1).

3.

1

22525—77.

4.

15763—91,

• \$

24499—80

1.

2.

30.12.80

6080

3.

4.

20982—75;

22885—77

5.

15763—91	4
21869—78	2
22525—77	3
23353—78	2
23355—78	2

6.

1989 .

25.10.89

3180

01.01.2000

7.

1989 . (1991 .)
2—90)

1,