



24767-81

24767-81*

Aluminium and aluminium alloys cold-formed
sections for wall and roof structures. Specifications

18 1140

7 1981 . 64

01.01.82

1.

1.1.


, 1987 .,
1986 . (2—87). 2 1,
(6)

, 1987

.2

24767—81

1.2.

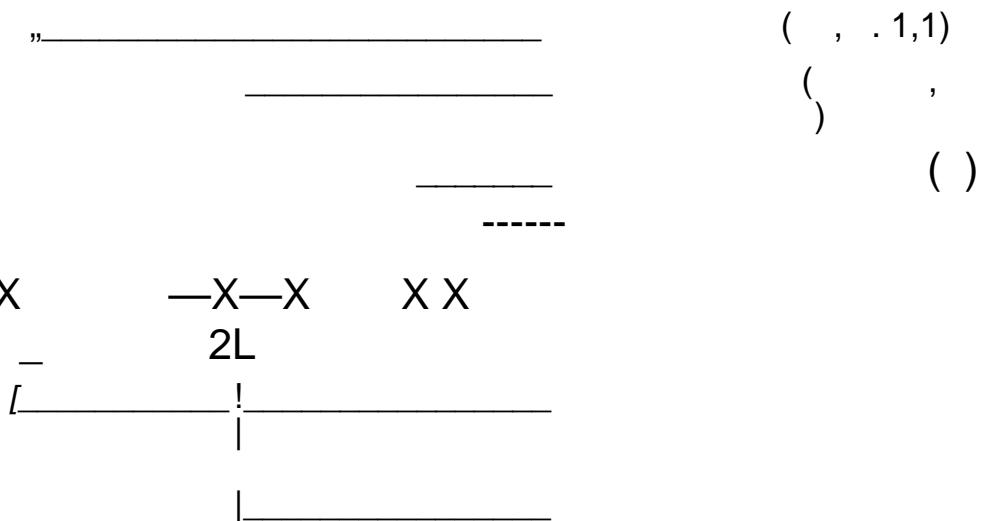

0,8 , 20 , (), 300 ,
, , () , 13726—78:

20—300—
13726—78

24767—81

1.3. 1 2, , , , , 1—14 , 1—14. 1


(1.4. , . . 1).

(300) 1,2 7,8 — 1,2 7,8 — ;

,
. 1—14.

(1,0) 2 %

to

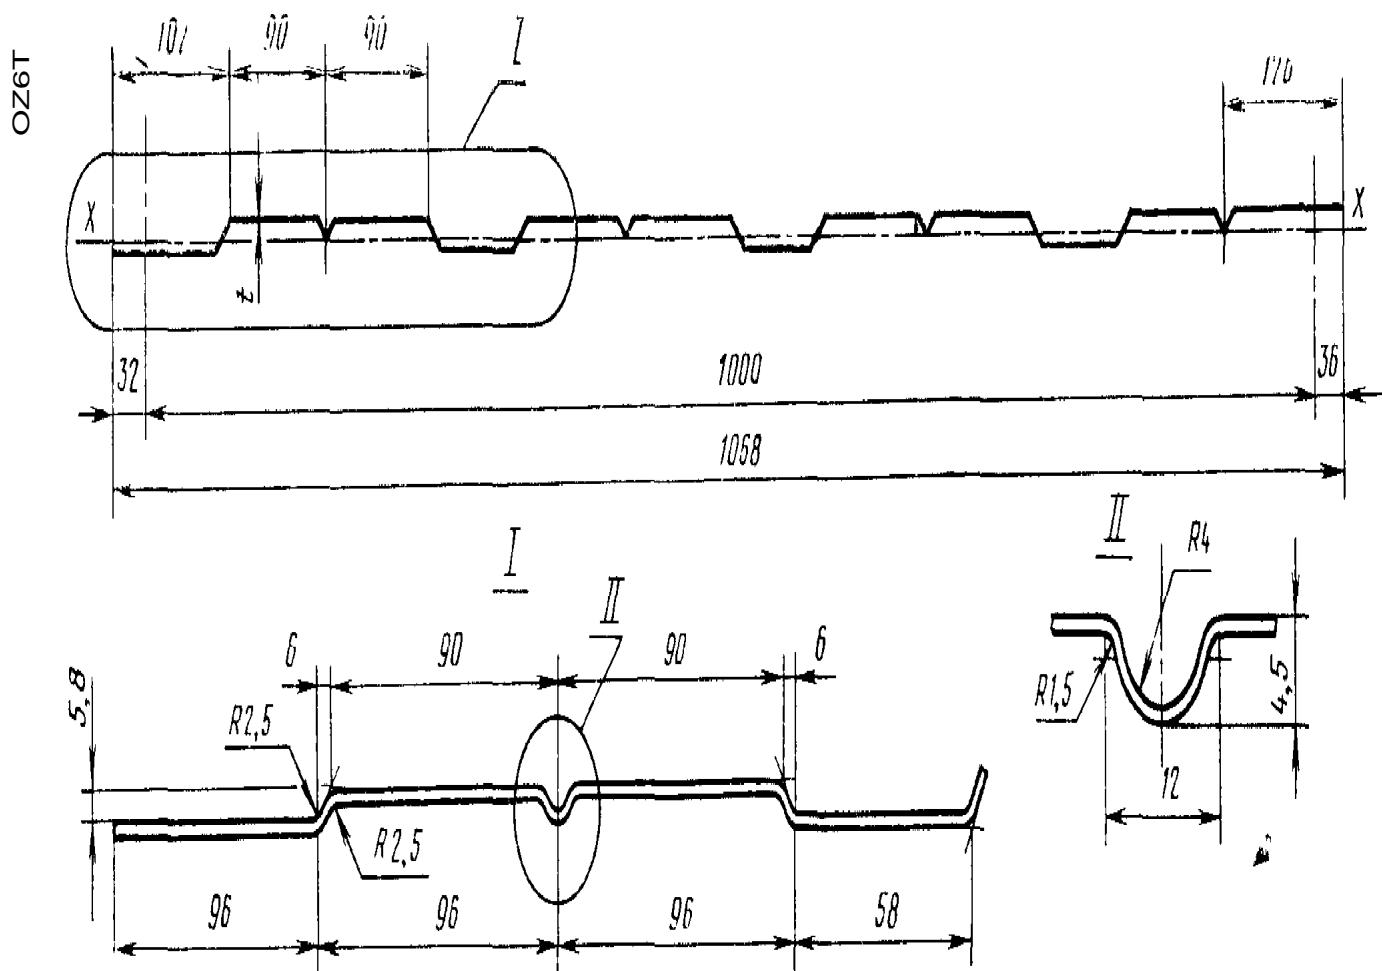


Черт. 1

1


	/,	,	- 2	1,	1 2	1	/ , * ,
-1000-0,8	0,8		7200	8,64	2,33	220	1,36
6-1000-1,0	1,0			10,80	2,92	2,74	1,72

W - \gg^* * ---Z9Zrr

II

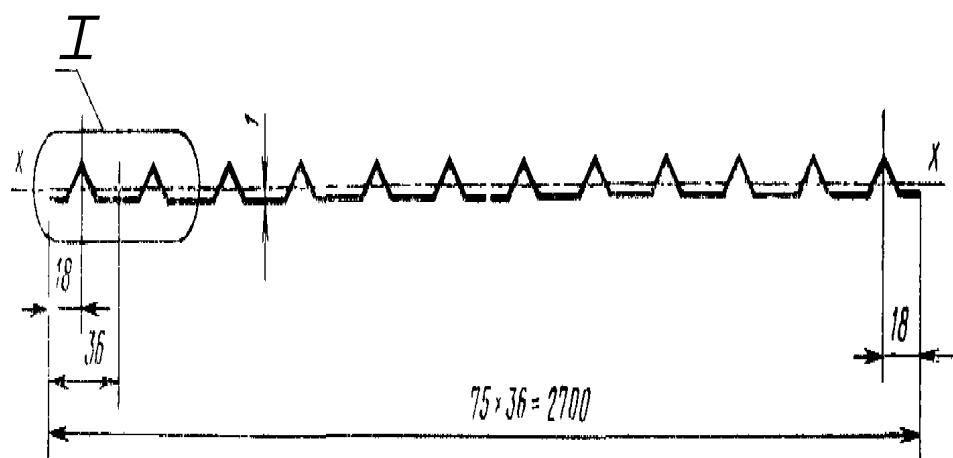


I

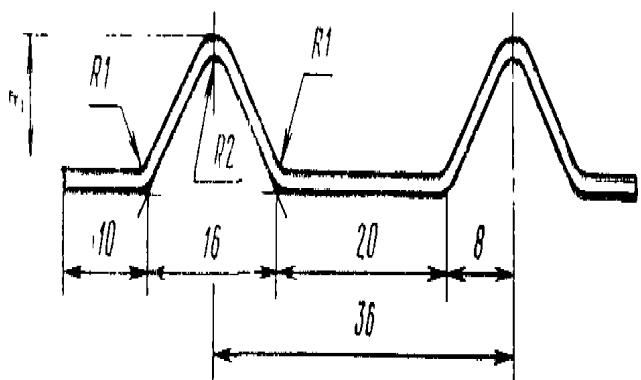

Черт. 2

2

			,				
	,	*	,	1	1 »	1,	*
8-270 0	1600	32,0		4	3,43		

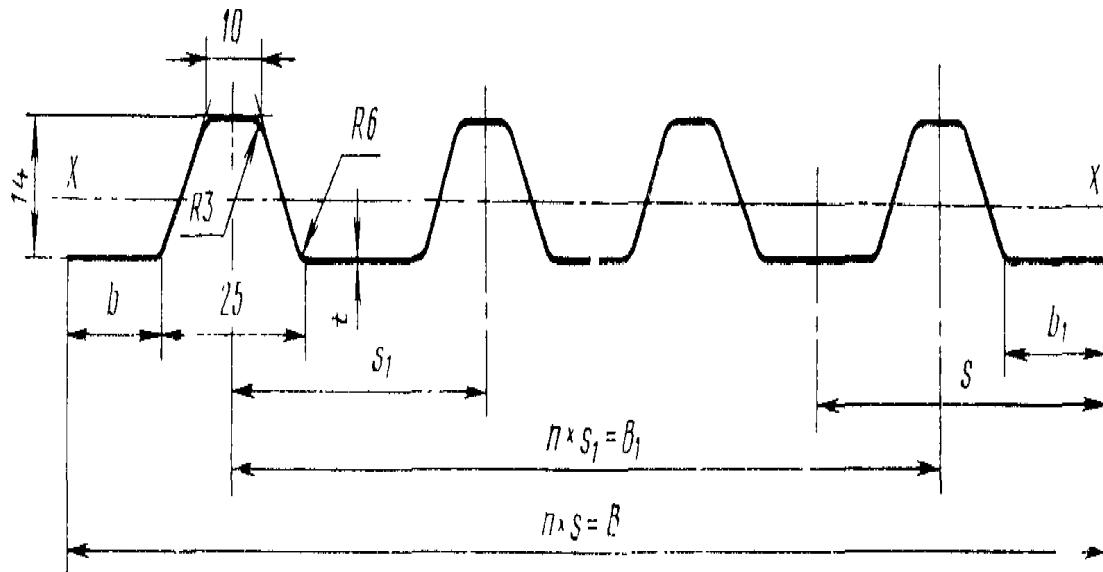


Черт. 3

3


	!							,							,							*						
	B_i	b	h_i	s	S_i	t				1	$,$	1		x														
14-900-0,8	970	900	22,5		50	0,8	18			10,31		2,78		2,87														
14-900-1,0						1,0				12,88		3,48		3,59													1200	
14-1000-0,8	1090	1000	27,5	37,5		0,8	10	2500		10,11		2,73		2,50														
14-1000-1,0						1,0				12,61		3,41		3,13														
14-1200-0,8	10	1200	52,5	62,5		0,8	12			10,27		2,77		2,07														
14-1200-1,0						1,0				12,84		3,17		2,59												ICAA		
14-1800-0,8	1800		37,5	100		0,8	18			16,82		4,54		2,52												1500		
14-1800-1,0						1,0				21,02		5,68		3,16												2000		
14-2100-0,8						0,8	18			25,63		6,92		2,88														
14-2400-1,0	2400		12,5	50		1,0		1200		32,04		8,65		3,61														
14-2700-0,8						0,8	27			25,22		6,81		2,52												UV3000		
14-2700-1,0	2700		37,5	100		1,0				31,53		8,51		3,15														
14-3600-0,8						0,8	36	1500																				
A14-3600-1,0	3600					1				9,08		2,62		*												4000		
										42,03																		

15

¥ *

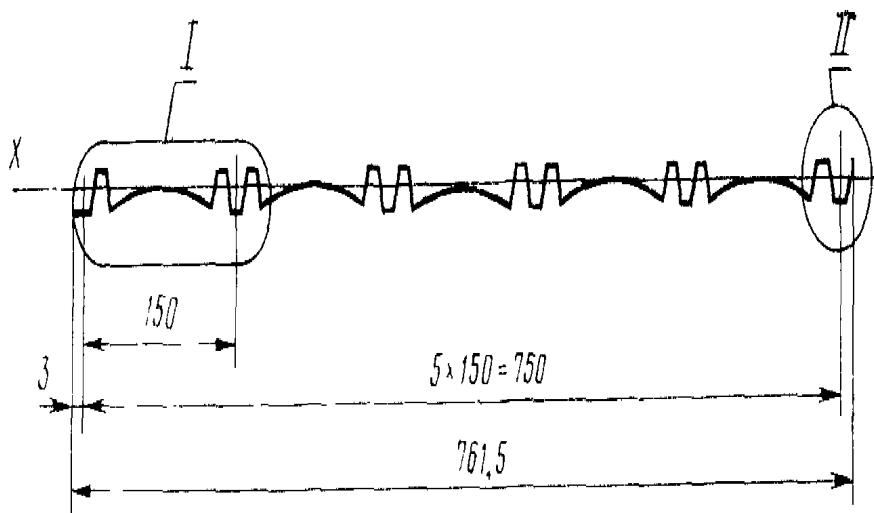

24767—81

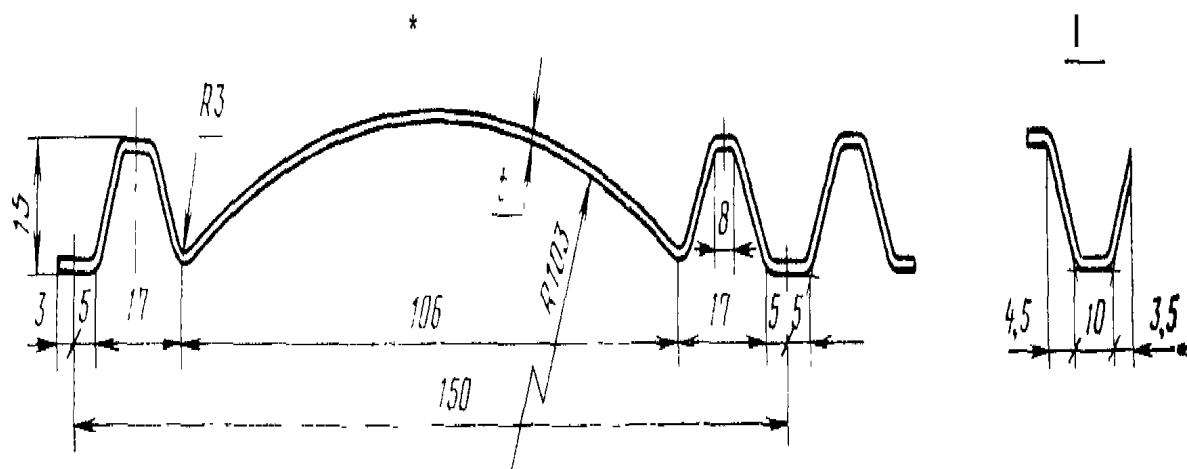


1,5 ,

Черт. 4

4

		,	,	1,	1 !	X	1 / ,
15-750-0,8	0,8	6000	8,22	2,20	2,92	2,26	1028
15-750-1,0	1,0		10,28	2,78	3,65	2,94	

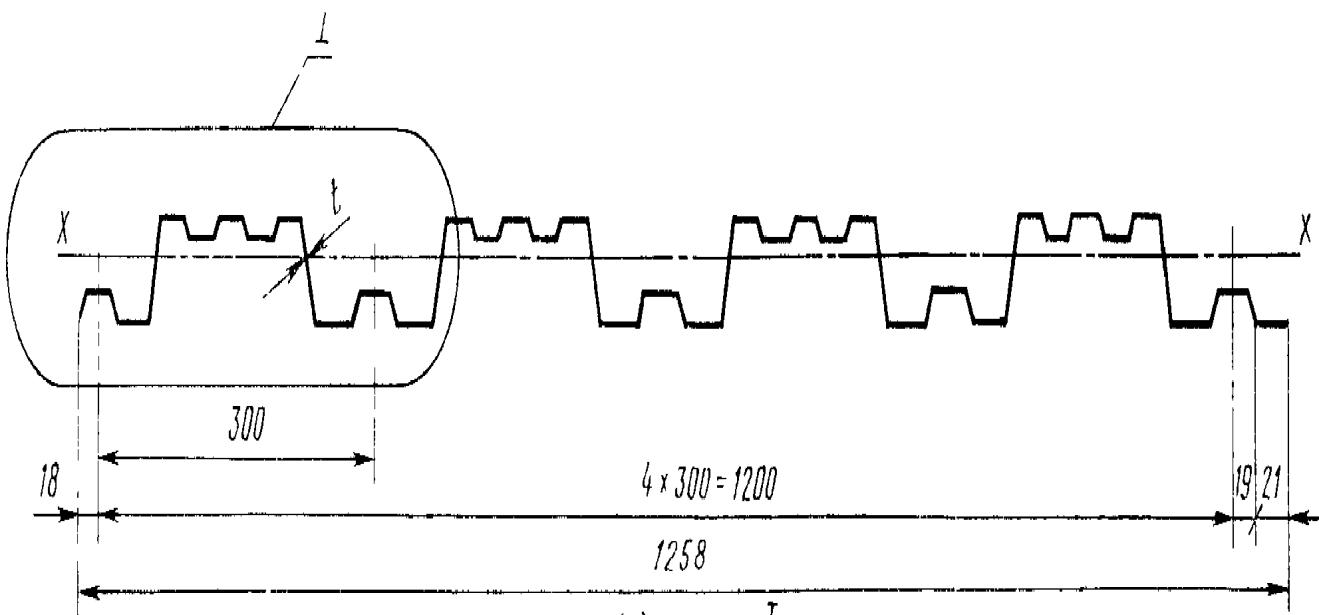


2

,5

1

5


28-1200-0,8	0,8	"	,	*	1,	1 2		x
28-1200-1,0	1,0		18,20		3,11	2,47	10,17	/ , 1
					3,89	3,09	12,72	*8- /9/

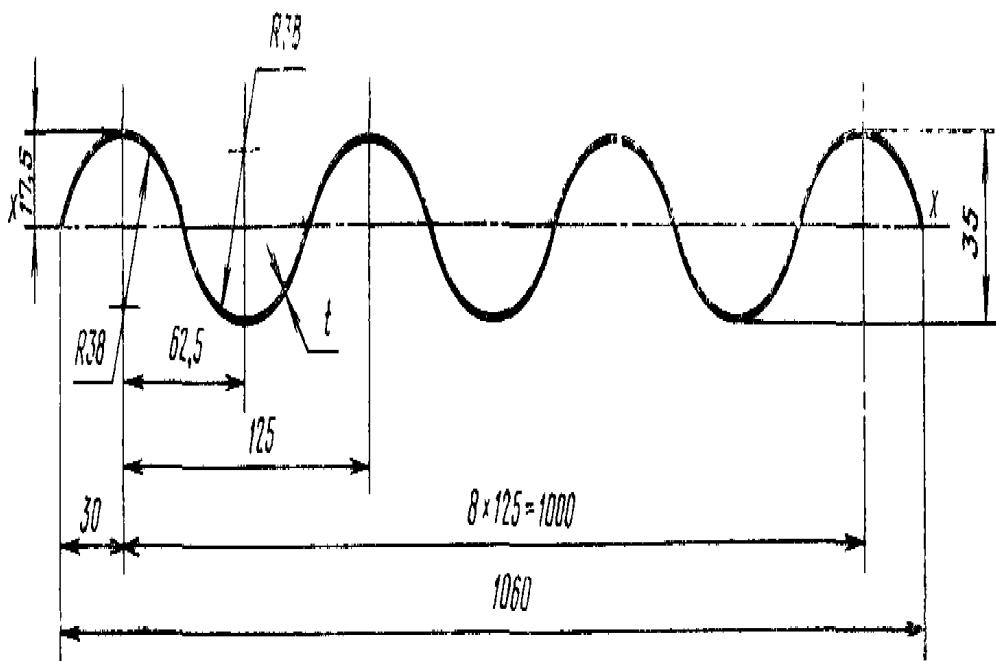

Черт. 6

6

35-1 8	,8	7000	5,53	2,58	2,53	8,24	1248
35-1000-1.0	1,5		12,41	3,35	3,18	15,32	

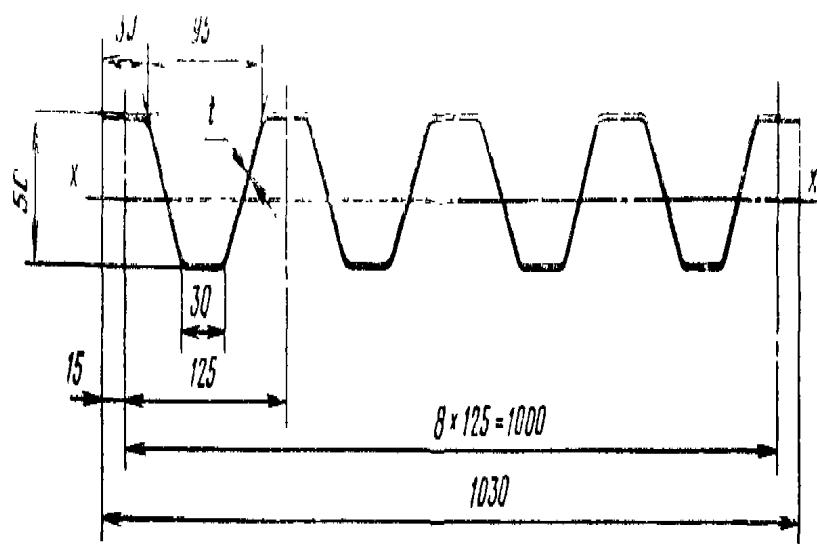

3 .

Черт. 7


7

	/,	,	,	*	, 1,	, 1	X	ih h /, 1	I ,
50-1000-0,8	0,8	7300	10,87		3,11	3,02		39,1	
50-1000-1,0	1,0		13,00		3,89	3,78		48,8	1440

8-Z9ZITZ

10



)

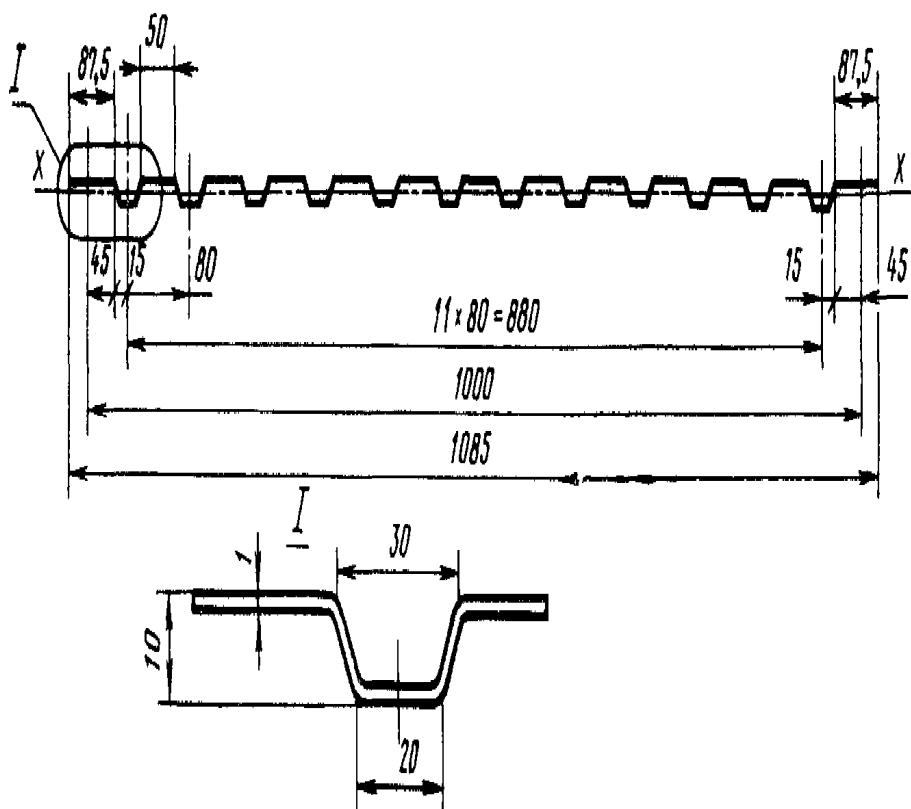

2 »,

9*

			1	1 *		
-1000-1,0	10	11,9	0,21	2,96	1,50	

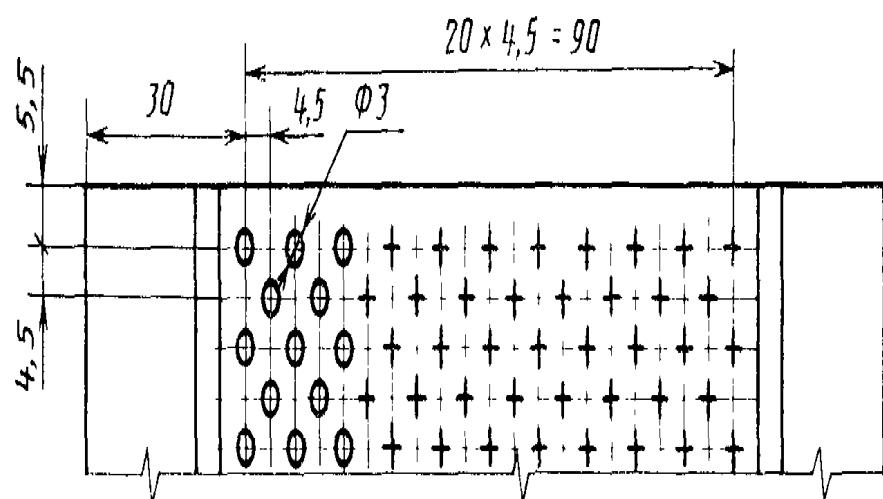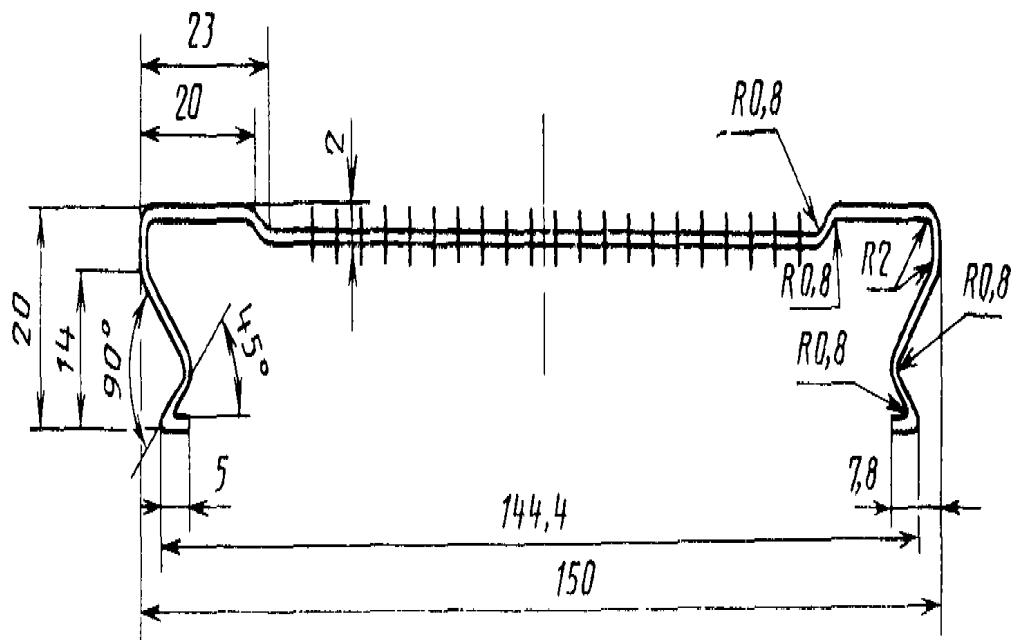

9

9

		,	,	,	
			1	,	1 2
20-150-1),8		1,248	0,337	2,247	
20-150-0,8	GOOD	1,248	0,296	1,973	208

.9 .9

,(. 1).

•0

N


•1

»

N

W



8

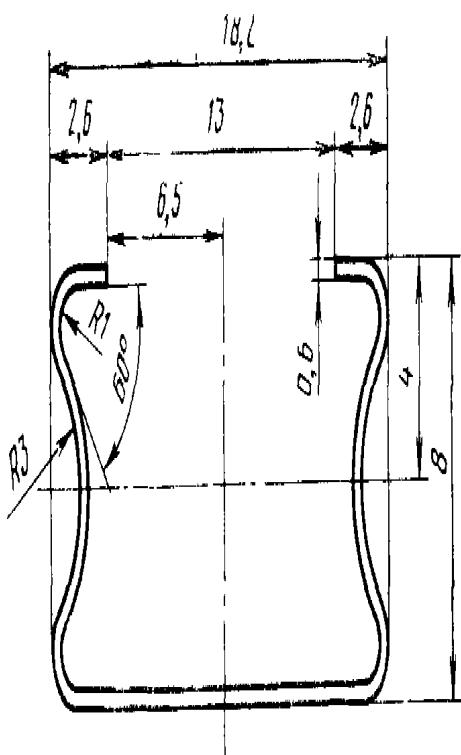

.10

10

CA8-13-fl.fl	31	0,26	1	3,41	38

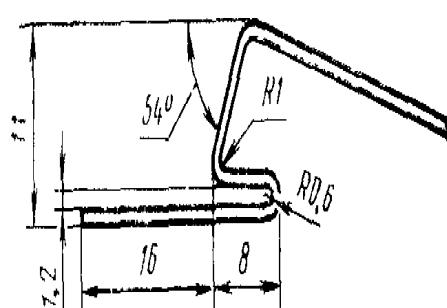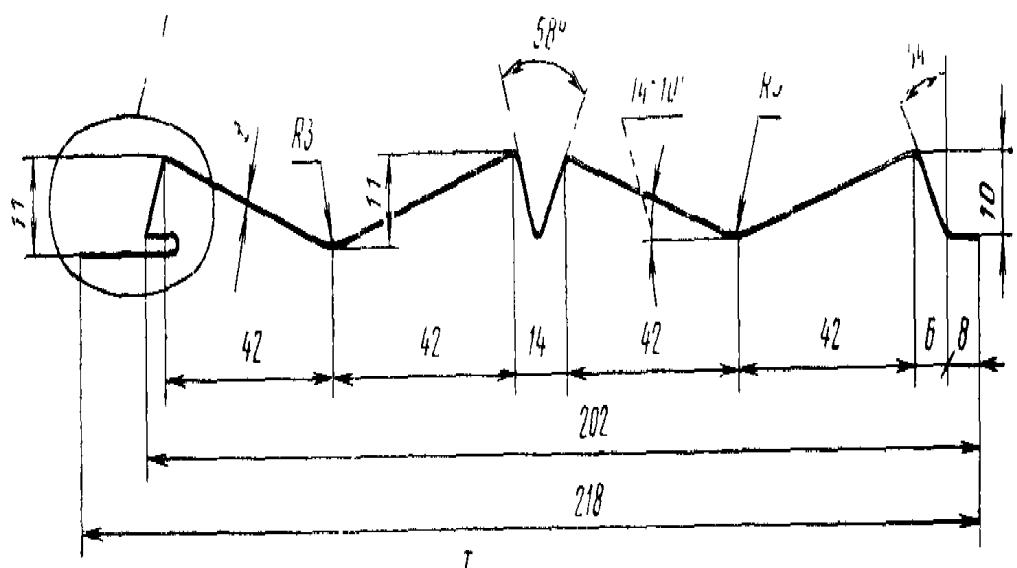

2 ,


Черт. 11

11

	1,	,	2	1	1 2	
-210-0,8	0,8	6000	2,05	0,55	2,52	256
-210-1,0	1,0		2,56	0,69	3,15	

15

TJ

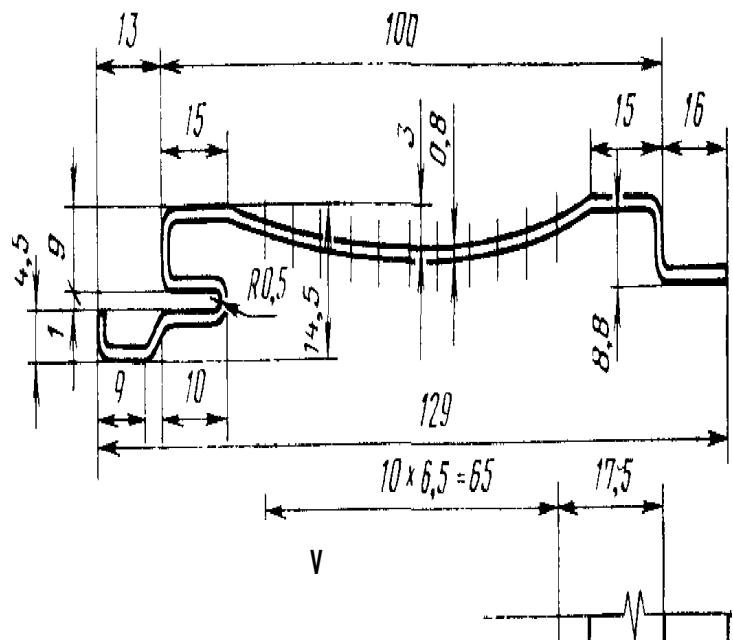


4 f

-4 4 f{ 4
if - ff

Черт, 12

12

15-100-0,8	7800	1,30	0,35	2,71
15-100-0,8		1,30	0,34	2,57

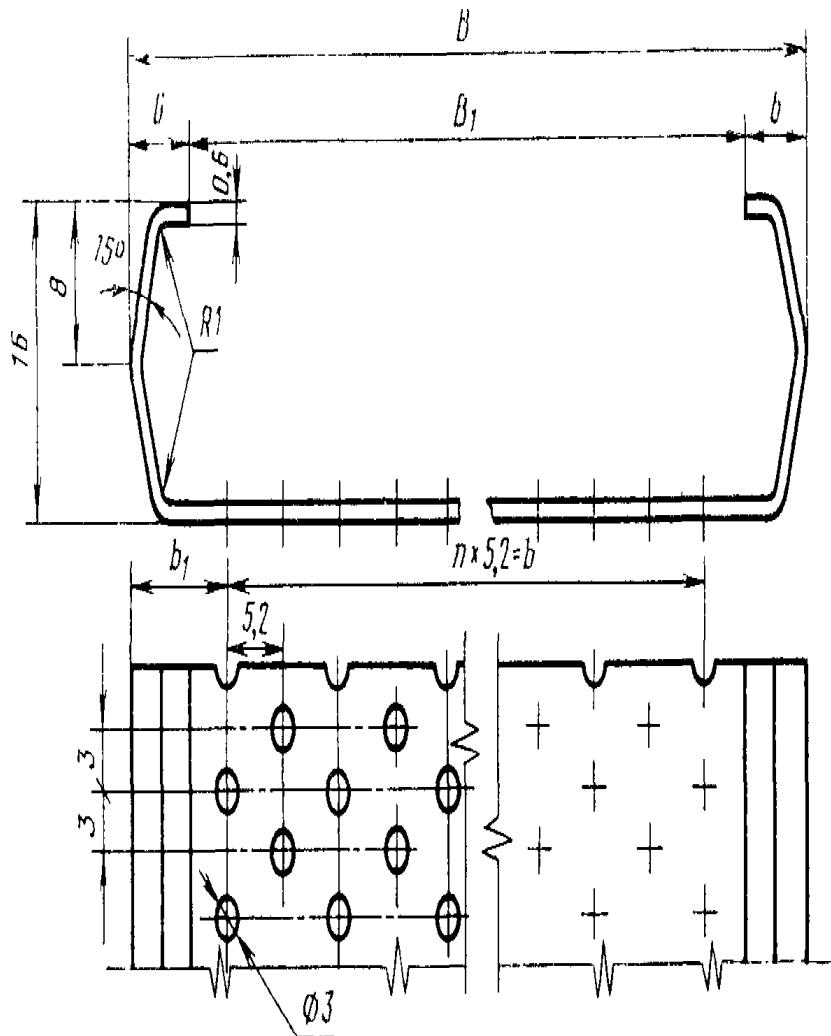


3 ,

.13

13

“1

	,						,		
	»	1)	1			2	1,	1	
CA16-72-0,6	81	72	-	-	-	3000	0,71	0,19	117
16-72-0,6			62,4	10,8	12			2,26	
16-122-0,6	134	122	-	-	-	1,01	0,27	0,16	167
16-122-0,6			114,4	9,8	22			1,90	
							0,23	2,02	
								1,72	

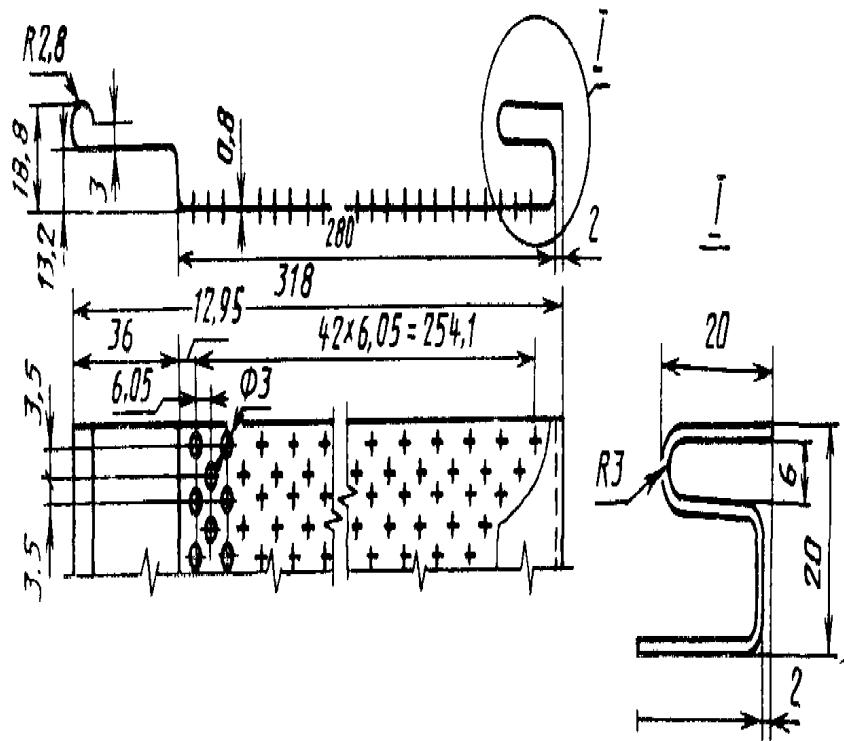

2 ,

Черт. 14

20—280—0,8	6000	3,09	0,74	2,33	386
20—280—0,8			0,83	2,61	

2.

2.1.

2.2.

13726—78

1

1).

21631—76

2

0,6; 0,8; 1,0

()

(72).

2.3.

, , ;

, ,

21631—76

2.4.

13726—78.

15.

1000	±1,0	± 1,0
1000	±3,5	±3,5
	= 5,0	±5,0
3000	±6,0	±8,0
	— 8,0	±10

2.5.

1).

21631—76

13726—78.

2.6. 5
1

2.7. 25
70

2.8. 5,0

2.9. 3,0
(1),

3

2.9. -28-73.

3.

3.1.

() ;

4.

4.1.

,

,

4.2.

4.3.

2.4—2.8 5 % , 3

4.4.

4.5.

,

,

,

4.6.

,

5.

5.1.

5.2.

; 7502—80,
427—75, 2,
164—80 166—80.
500 -

(5.3), ..., 1).

5.4

3749—77
427=75

5.5.

-23-76.

(, . . 1).

6.

6.1.

9.011 — 79

6.2

3000

300

6.3.

()

6.4.

(),

. 20

24767—81

;

6.5.

6.6.

,

—

15150—69.

1,

//.
Jl. fi.

. 26 12.85 . . . 18.04.86 1,25 . 1,38 . . . 1,05 . . .
12000 5

« » , 123840,
.. 3. , . , 256. . 1970