



26155-84

13 1984 . 1280

26155-84

Corrosion-resistant sled drums.
Specifications

14 1530

13

1984 . 1280

01.01.86
01.01.91

- () , () ,
 III) , , , II

3733—82

1. ,

1.1.

I —

3

:

,

II ;

— ,

150

3

,

III ;

— ,

250

3

,

1.2.



,


*

. 1.


©

, 1984

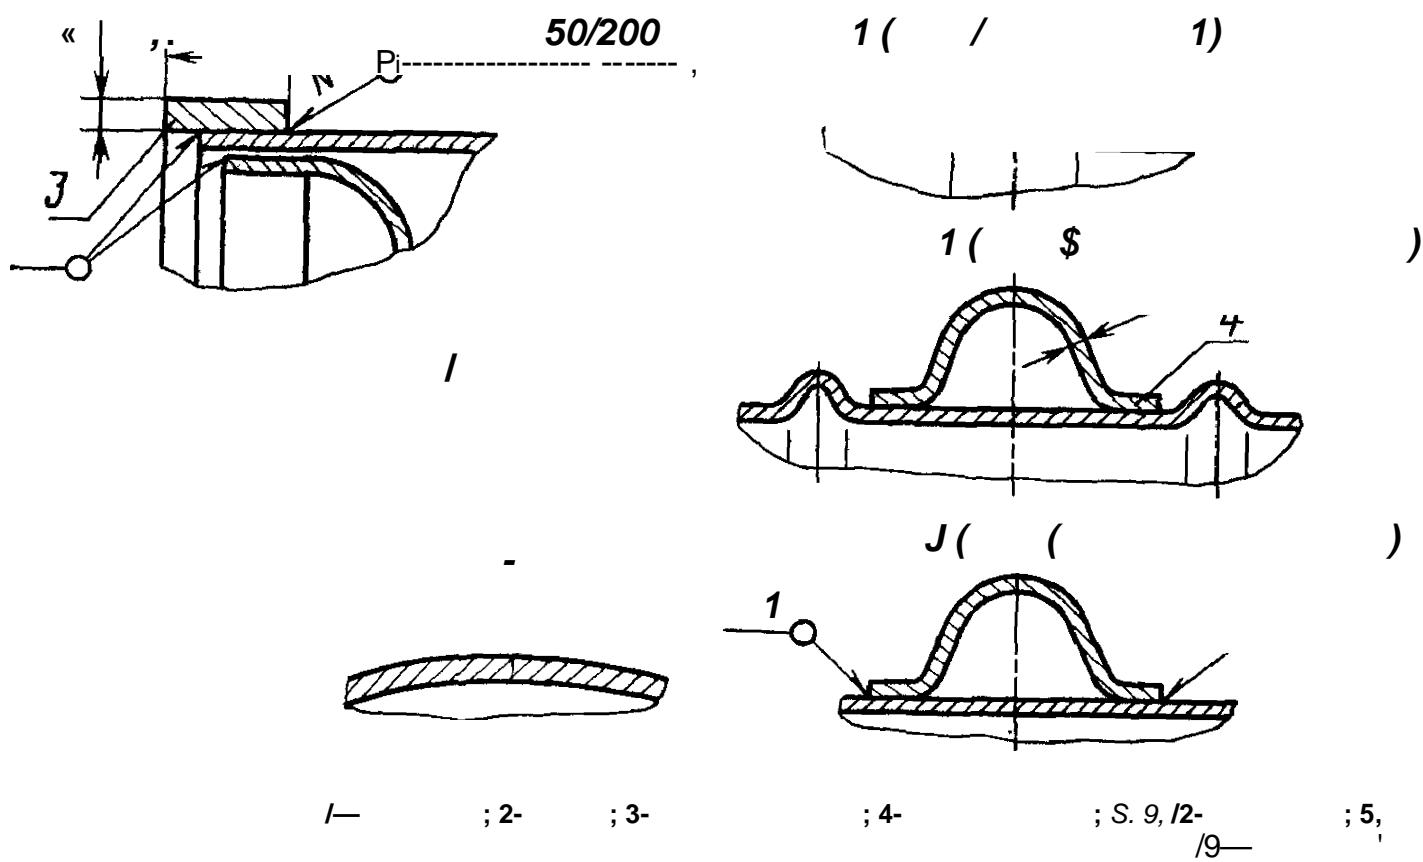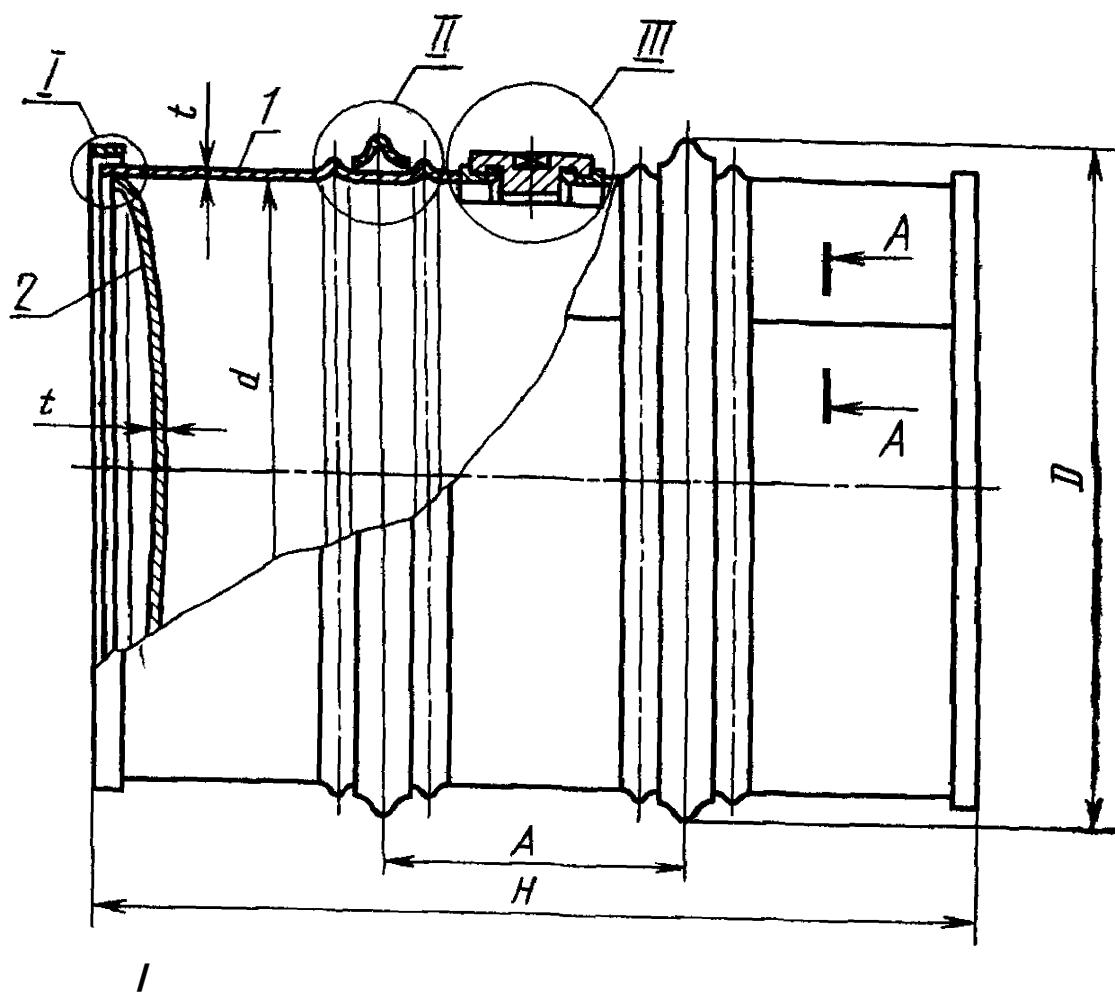

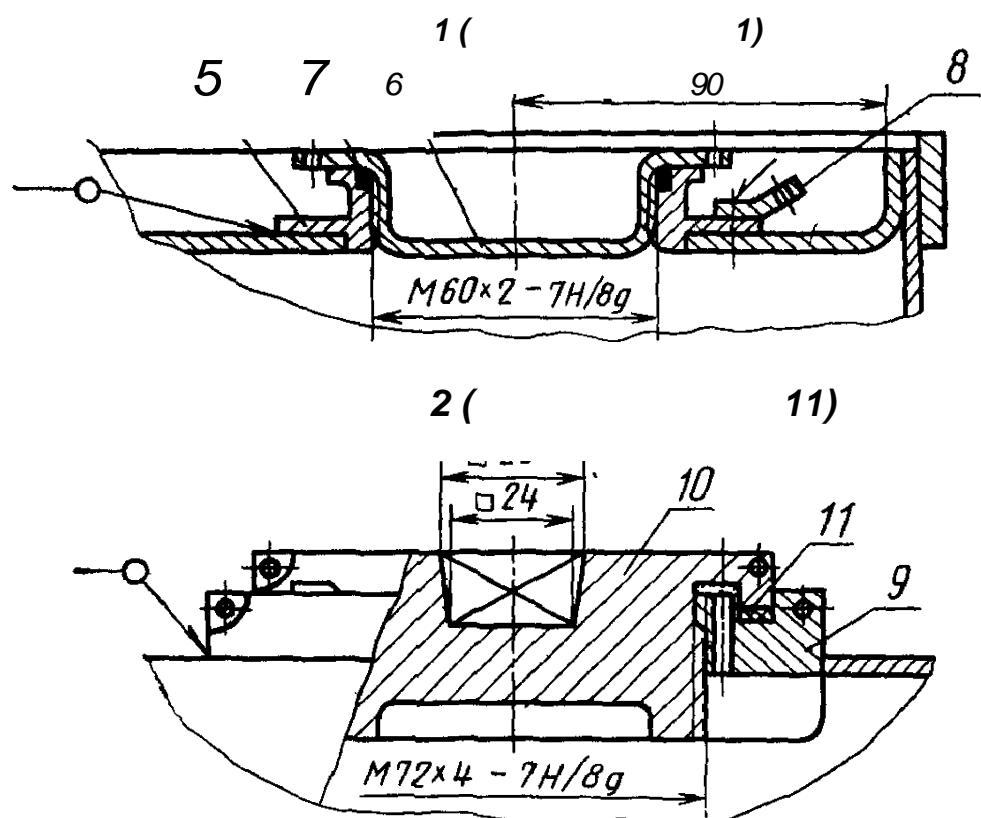

			es	EZ
d			££	
		—1		

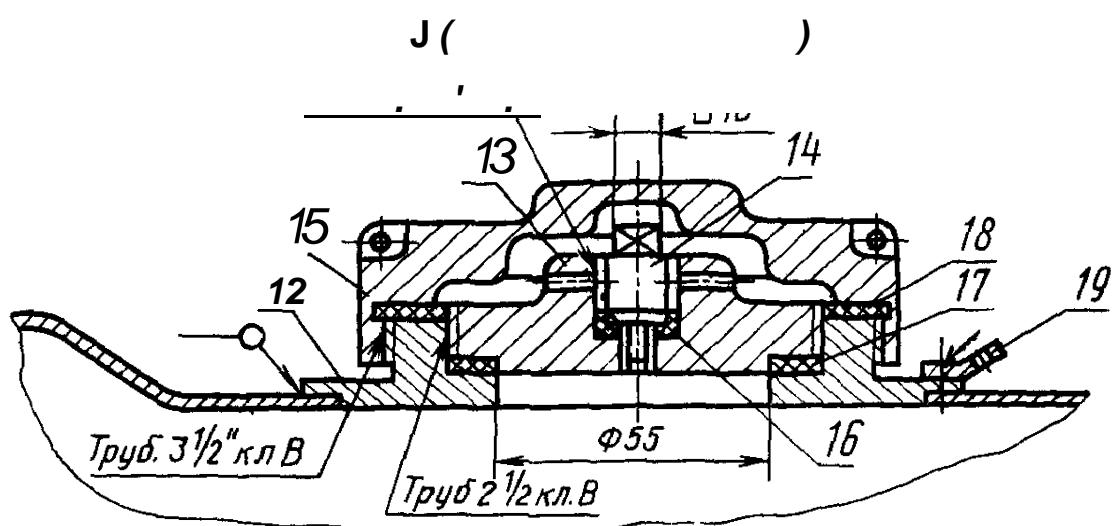

10, 18— ; 14— ; 15— ; 7, 11, 16, 17, 18— ; 8,

. 4

261S5—84

1

		*		D								
I	14 1532	100	463	463	800	2,0	-	270	3	25	28,0	
II	14 1533	150	545	600 ₆	748	2,5	2,5	250	5	25	47,0	
III	14 1535	250	544	600 ₅	1200 ₅	3,0	3,0	400	5	25	75,0	

1.3.

«

25347—82:
JT14

14,

h 14,

2

1.4.

150 3:

—150 26155—84

2.

2.1.

,

|

2.2.

1

15150—69.

,

2.3.

. 2.

2.4.

)

(

, , ,

I),

:

08 18 10

5632—72;

5582—75

12 18 10

	I	II	III
1, , (/ ²),	0.05(0.5)	0,07(0.7)	
2. , (/ ²), -	0,02(0.2)	0,025(0,25)	
3. , (), -	228 (55)	333 (60)	

) , — -

12 18 10	12 18 9 ,	08 18 10
7360—77;	II III) —	- -
) (

12X17 08X17

5949—75.

;

) — -

,	503—81	08 ,	1050—74
			0009—74

380—71.

380—71	16523—70,	, 08 ,	
	1050—74;		
)	—		
103—76,	2 2,	380—71;	
)	—		
	15	1412—79	(
)	2 2,	380—71.	-

;

) — -4

007—80.

2.5.

2.6.

,

2.7.

.

2.8.

,

200

(

).

2.9.

,

2

,

2.10.

,

,

-

8713—79,

14771—76

5264—80.

15878—79.

2.11.

20

2.13.

<

-07 18 9 , -05 20 9
 -26 , -26 , -26

2246—70
 9087—i81;

-07 18 9 , -05 20 9 ,
 2246—70,
 -08 20 9 2 -08 19 10 2
 9466—76.

-07 19 10
 —
 10052—75

10052—75 9466—75.

-02 19 9

9466—75.

2.14.

46

50

9467—75

24306—80.**2.16.****2.16.****2.17.****2789—73.****2.18.** **$0^{\circ}30'$.****2.19.****3 (****'5)****2.21.****5****2.22.****2.23.****2.24.****2.25.****0,20 (2,00) —****I,****(/ ²):****0,22 (2,25) — »****» II,****0,30 (3,00) — »****» III**

, (/ ²):

0,02 (0,2) —

I,

0,025 (0,25) —

II III.

2.26.

,
1,2 .

2

2.27.

2.28.

2.29.

-785

7313—75

-710

9355—81

-010

9355—81

-059

23494—79.

2.30.

9.402—80.

2.31.

VII

9.032—74.

3.

3.1.

I II (: ,

III

3.2.

5%

4.

4.1,

4.2.

4.3.

. 3.

3

		, %		
1.	: -	5 () -	1.2 2.20 2.8 -	5.2 5.2 5.2
	,	100	2.18 1.2 1.2 ; 2.9 6.1 2.27 2.29 2.31 2.17 2.23	5.2 5.2 5.3 5.3 5.4 5.3 5.3 5.3
2.	:)))	100 5 / 1 () 10 ()- 1	2.14 2.14 2.11 - 2.14 2.14	5.5 5.5 5.7 5.6 5.8
3.)	100	2.25 2.25	5.9
4.		5		5.10

II III.

. to 16155—«4

4.4.

4.5.

(

4.6.

4.7.

4.8.

2

5.

5.1.

AM

6032—75.

5.2.

5.3.

5.4.

5.5.

3242—79.

5.6.

(1 1

7512—75.

10%

5.7.

— 6996—66.

5.8.

3242—79.

5.9.

5.9.1.

20°

2.25,

5.9.2.

2.25,

5 , (

5

0,05 (0,6 / m^2), 0,5%-

5.10.

2.25,

5

$$5.11. \quad (18425 - 73) : (30^\circ -).$$

, . 5.9 . 5.10. (-

6. , ,

6.1. ,
14192—77 :

() . () -

— , 2930—62 (

6.2. ()

)
18573-78

6.3.

14192—77.

6.4.

65  ©

21020 76

6.6-
-1313-13.

50—69,

6.7.

7.

7.1.

7.2.

II III — 1,5

7.3.

II III — 1,5

