

26543—94

—

2-96/72

,

26543-94

1

(

)

,

2


(

6—94

21

1994 .)

:

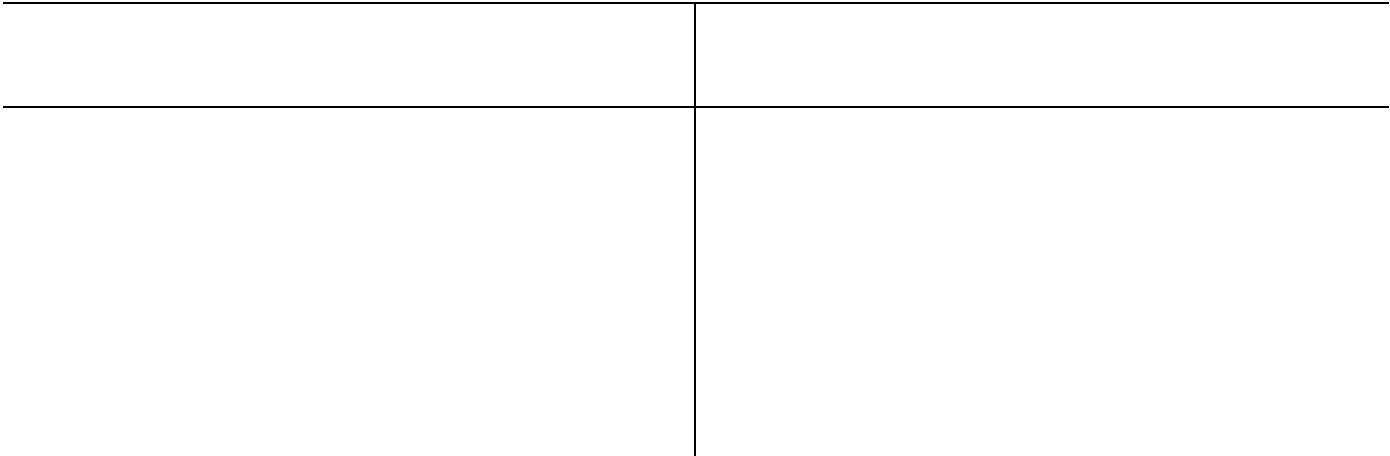

3

,

**10
26543—94**

1996 .

3

1 1996 .

4 26543-85

©

, 1996

,

II

Planetary gearmotors.
Basic parameters

1996—07—01

1

0,06 (—) 0,45
315,00 / ,
, 1,2 3.

2

24266—80

24386—91
25484—93

26543—94

3

3.1

d

(4).

3.2

1,

— ,

2.

3.3

0,06; 0,09; 0,12; 0,18; 0,25; 0,37; 0,55; 0,75; 1,10; 1,50; 2,20; 3,00; 4,00;
5,50; 7,50; 11,00; 15,00; 18,50; 22,00; 30,00; 37,00; 45,00 .

3.4

,

3.

3.5

—

25484.

—

24266.

3.6

3.7

24386.

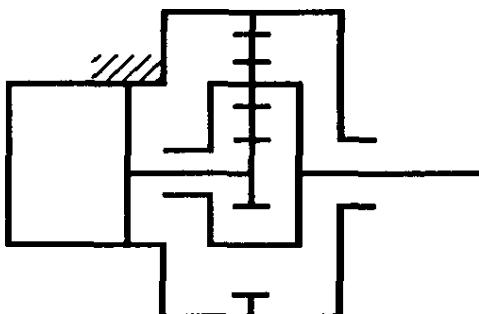


Рисунок 1


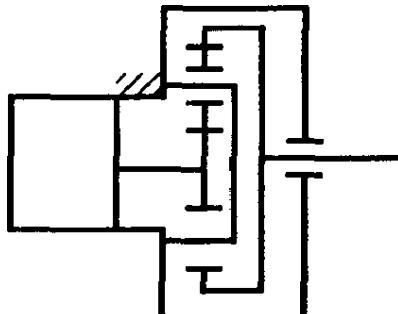


Рисунок 2

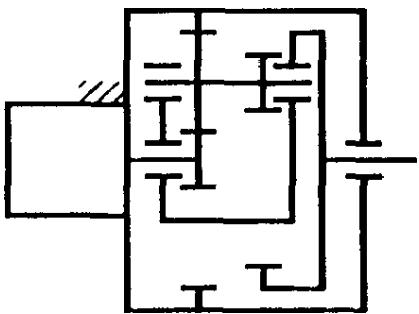

3

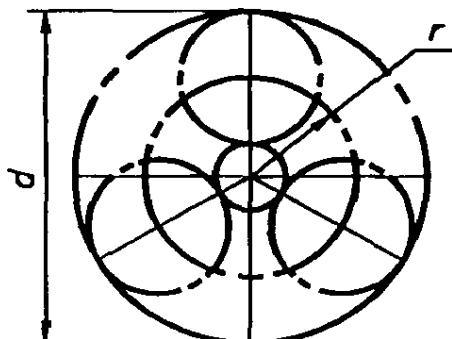


Рисунок 4

В миллиметрах

Ряд 1	Ряд 2	Ряд 1	Ряд 2
—	90	—	355
100	—	400	—
—	112	—	450
125	—	500	—
—	140	—	560
160	—	630	—
—	180	—	710
200	—	800	—
—	224	—	900
250	—	1000	—
—	280	—	—
315	—	—	—

1
2

1

2

1	2	1	2
31,5	—	—	112
—	35,5	125	—
40,0	—	—	140
—	45,0	160	—
50,0	—	—	180
—	56,0	200	—
63,0	—	—	224
80,0	71,0	250	—
—	—	—	280
100,0	90,0	315	—
	—	—	—

1
2

1

3

/ (*)

1	2	1	2
-	0,45(0,007)	12,50(0,208)	14,00(0,233)
0,50(0,008)	0,56(0,009)	16,00(0,266)	18,00(0,300)
0,63(0,010)	0,71(0,012)	20,00(0,333)	22,40(0,373)
0,80(0,013)	0,90(0,015)	25,00(0,416)	28,00(0,466)
1,00(0,017)	1,12(0,019)	31,50(0,525)	35,50(0,591)
1,25(0,021)	1,40(0,023)	40,00(0,666)	45,00(0,750)
1,60(0,027)	1,80(0,030)	50,00(0,833)	56,00(0,933)
2,00(0,033)	2,24(0,037)	63,00(1,050)	71,00(1,183)
2,50(0,042)	2,80(0,046)	80,00(1,333)	90,00(1,500)
3,15(0,052)	3,55(0,059)	100,00(1,666)	112,00(1,866)
4,00(0,067)	4,50(0,750)	125,00(2,083)	140,00(2,333)
5,00(0,083)	5,60(0,093)	160,00(2,666)	180,00(3,000)
6,30(0,105)	7,10(0,118)	200,00(3,333)	224,00(3,733)
8,00(0,133)	9,00(0,150)	250,00(4,166)	280,00(4,666)
10,00(0,166)	11,20(0,186)	315,00(5,250)	-

1	1	.	
2			
3	10 %.		
	3.4	3	
50	.	60	
20 %.			-

629.114.066:006.354

21.200

15

41 6172

: - , , , , -

021007	10.08.95.		23.04.96.		12.07.96.
,	.047.	-	.037.	372	.3599. .327.
107076,				, 14.	
			—	"	"
			,	.6	