



26649-85
(4890-84)

EL

10

1985

3558

26649-85Hydrodynamic torque converters for building and
road machines. Acceptance rules and testing methods**|CT 4890—84)**

41 4720

1985 . 3558**10**01.01.87

25783-83 26216—84.

4890—84.

1.

1 1.

. 1.

1

		25783—83 26216—84

()

, 1986

1.2.

1.3.

1

1.4.

. 2.

2

	+ + + +	
()	+ + + +	+ + + 4~ + +
,	-	+ + + +
	-	+ + +
	+ +	+ +

2.

2.1.

2.1.1.

, , 15—25°

75%.

2.1.2.

, ,

. 2.2.3.

2.1.3.

,

70 100° .

,

2.1.4.

, ,

,

,

2.1.5.

, ,

,

,

25783—83,

,

2.2.

2.2.1.

2.2.2.

1,0 23676—79,

2.2.3.

, ,

,

)

,

;

)

(

, 3000 m^{-1});

)

,

)

;

;

)

;

,

:
2%;

0,5%;

3%;

2,5;

2° ;

)

,
12 1.026—80

12.1.028—80;

)

(
),

2.

2.3.

2.3.1.

2.3.2.

—

7,5 * / .

3°30'.

2.4.

2.4.1.

2.4.1.1.

25783—83

2.4.1.2.

2.4.1.3.

,

(

)

2 4 3

2 4 2

2 4 3
2 4 3 1

223

24 32

\ = 600, 800 1000

1

— 70 10 ° ,
— 15

2 4 3 3

\ *m3LX*

20%.

70 100°

— 20

2 4 3 4.

. 2.43.2

2 4 4,

. 24 6

2.4.3.5.

2.4.4. ()

2.4.4.1.

2.4.4.2. . 2.4.3.2.
 $\lambda_2 = 0)$ (. 3.

3

* , , — i 6000 1000 1500 (filraax 1500) 2000 (2000) ^mai	, 90 » 60 » 60 » 45 30
--	---------------------------------------

2.4.4.3.

| λ_2 70 100° , Qi

2.4.5.

2.4.5.1.

Af_b 20%

2.4.5.2.

— 60

2.4.6.1.

2.4.6.

2.4.6.1.

. 2.4.3.4

)

(

200 m^{-1} «1 = 600 m^{-1} « *);

)

Q_b

)
||

|

80 90°

2.4.6.2.

(«

«2, ^),
()₂

2 4.6.3.

$\pm 1\%$

2.4.6.4.

0.
2.4.6.5.

2

| 0,7

2.4.6.6.

)
 Q_b («1)[{]
()₂ 0

),
 N_2 ;
)

)

|

)
)

$d_{\gamma s};$

Q_b ;

)
)
2.4.6.7.

{ 2
/21 = 600 ^1 | , 200 ~1

,
3.
2.4.6.8.

, d₇5 0,75,

2.4.6.0.

, (%)

2.4.6.10,

,
4, 5.
2.4.6.11.

,
(,),

2.5.

2.5.1.

2.5.2.

12.1.026—80 12.1.028—80.

. 2.4.6.

300 (1000±50)

2 5 3

,

26

5

) ,

262 |,], > ^75*

2 62

$$t \sim \frac{1}{\sqrt{\lambda}} \quad 1 = -1; \\ \text{---} \quad \text{---} \quad \text{---} \\ \text{---} \quad \text{---} \quad \text{---}$$

$$2 \overline{,} \quad , \quad - \quad , \\ \overline{,} \quad , \quad -1 \overline{,} \quad , \quad / \overline{,}$$

$$D_a^q - , \quad / \quad 3,$$

,

= 0.75 —

S. —

) = 0,75 —

= 0,75,

) = 0,75 —

$$= 0,75$$

263

$$Mi = f(rii) \quad t = \text{const}, K = \quad = / 0 > \\ M_2 = f(n_2)y \quad Mi = f(n_2) \quad Hi = \text{const}$$

$\text{rti} = \text{const}$ $i = \text{const}$,

3, 4, 5.

\

\ max

2

Mi

2

26216—84

) i

(

(


) \


Mi -

q — / 3,
(Oi —Z>_a — , / ,
26216—84,


26216—84

25783—83

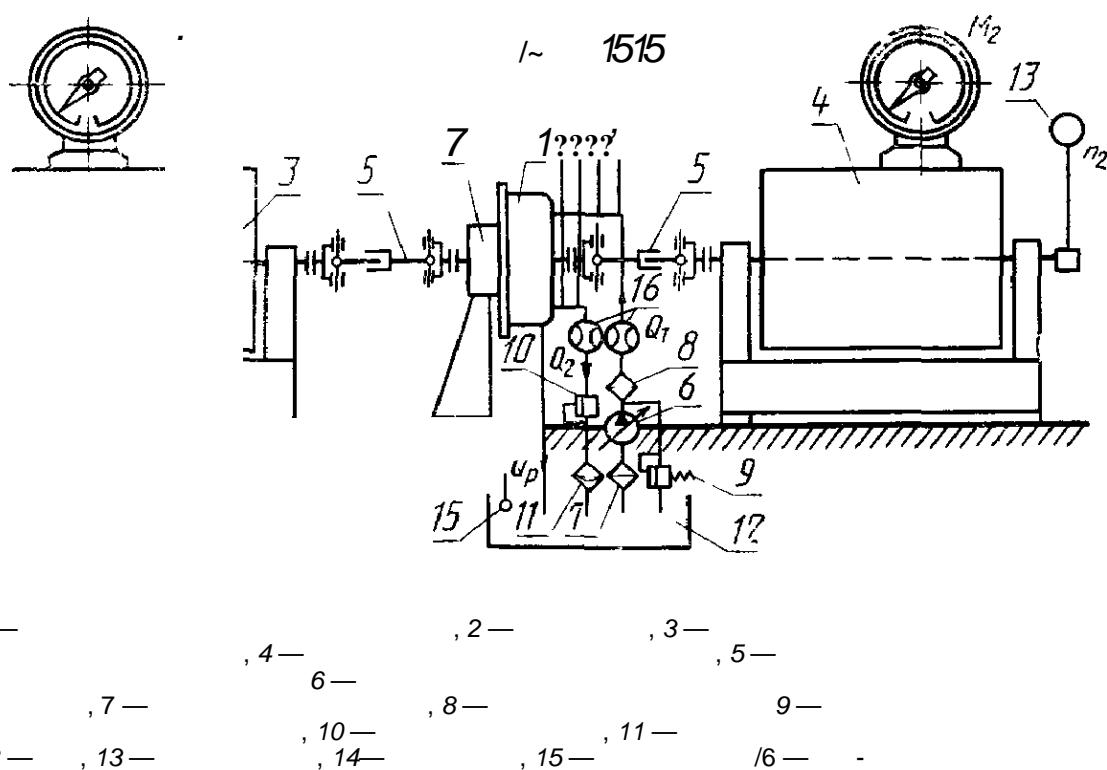
**1**—**2**—**3**—**4**—**5**—**6**—**7**—**8**—**9**—**12**—**10**—**11**—**16**—**13**—**14**—**15**—**17**—

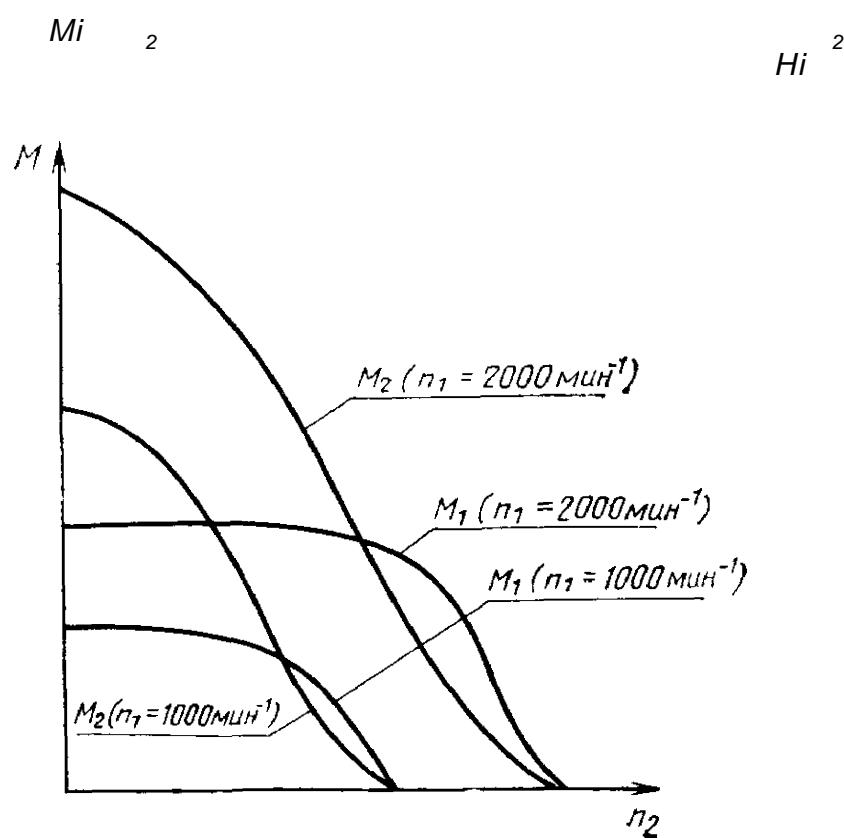

M_i ()
—

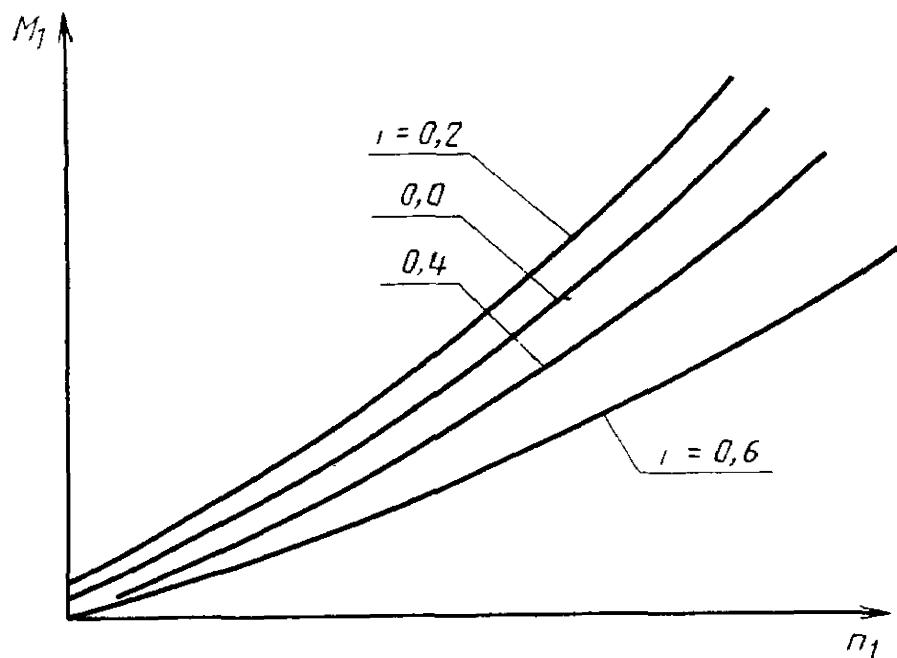

() i

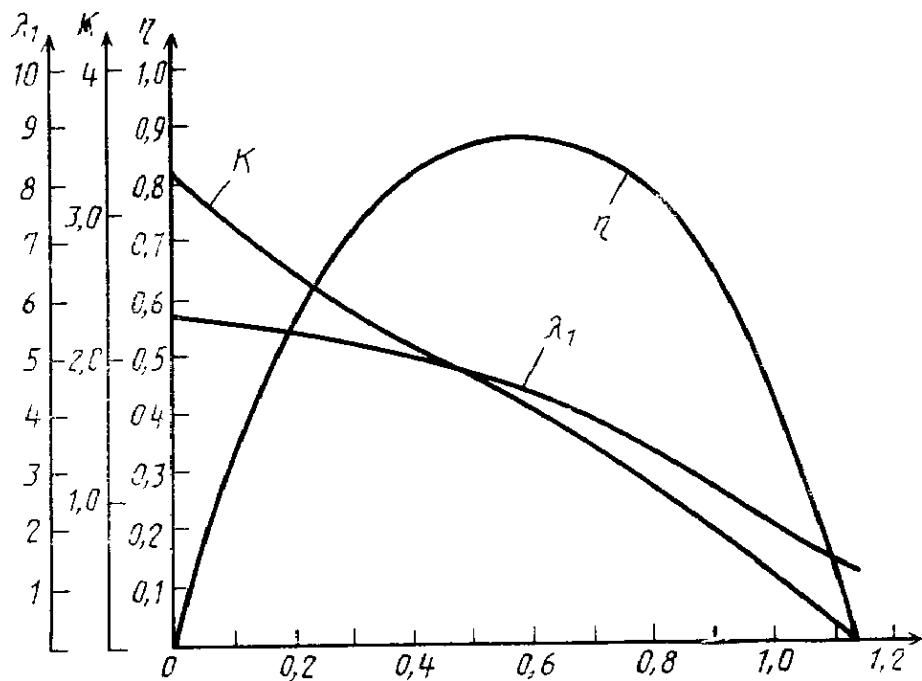

. 10 000 . 03 12.85 . . . 20.01 86 1,0 . . . 1,0 . . . 0,91 . . .
 « . » . . . , 123840, . . . , 6. . . 1568 . . . 3 . . . 5 . . .