

,

2715—75

2715-75* *

Metal wire screens. Types, basic parameters and dimensions

2715—44


1201 0

24 1975 . 3986 -
01.01.77
1986 . 24.06.86 9 1682
01.01.97


1.

1.1.


— : () (-
,) (. 1);
— (. 2);
— (. 3);

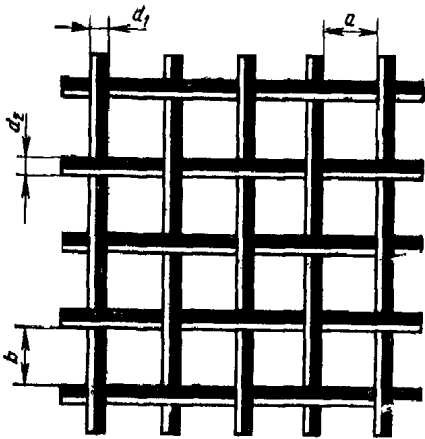

Чепр. 1

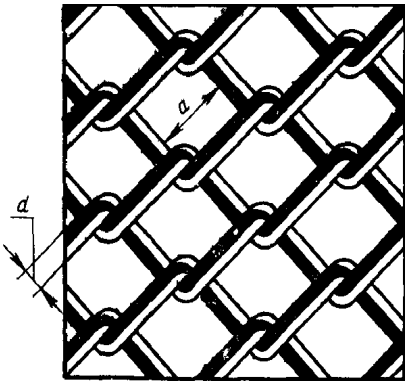

. 2

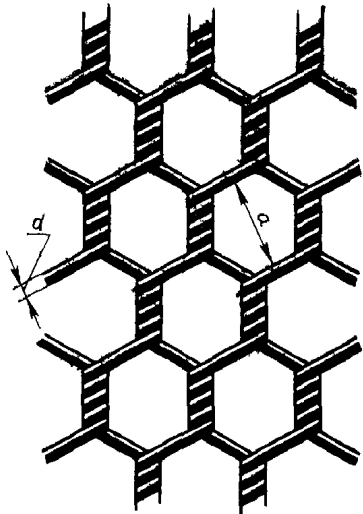


. 3

* (1987 .) L
1986 . (9—86).


(. 4);

(. 5);


(. 6);

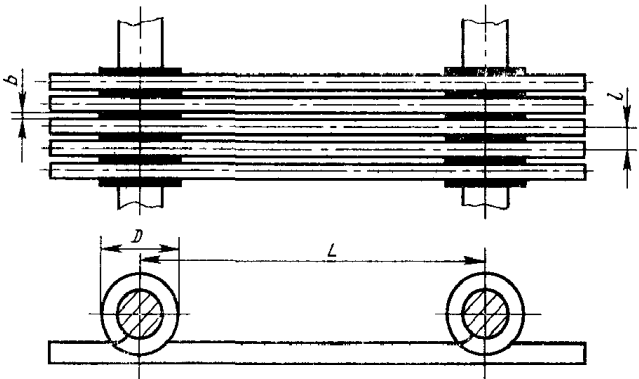

. 4

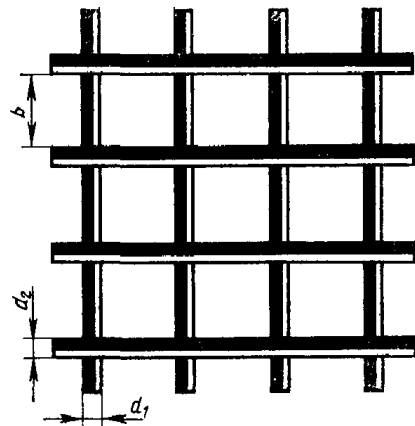

. 5

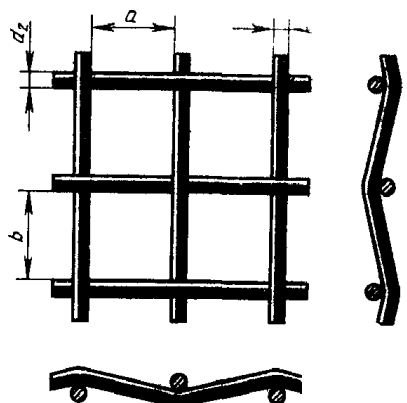

. 6

1.2.

1.3.

1.4.

1.4.1.
()

1.4.2.

— 25 %
— 25 50 %
— 50 75 %
— 75 %




a-fr-100

$\wedge(a+d\wedge ib+d^*)'$


b —
 d —
 d_2 —





$$= \frac{2-100}{(a+d)a} \sin a'$$

d —
 a —

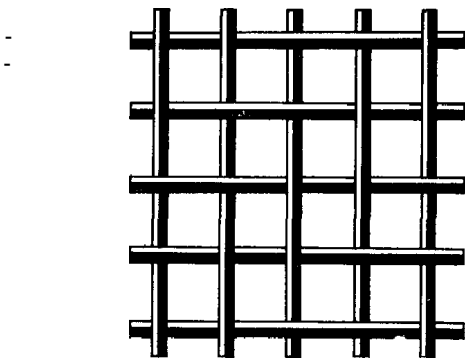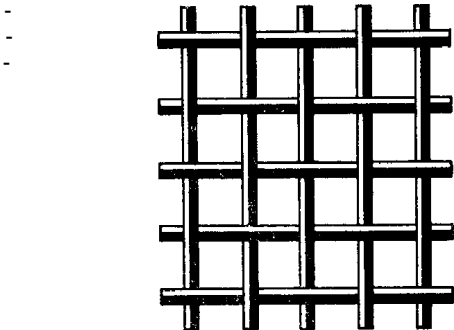


» «



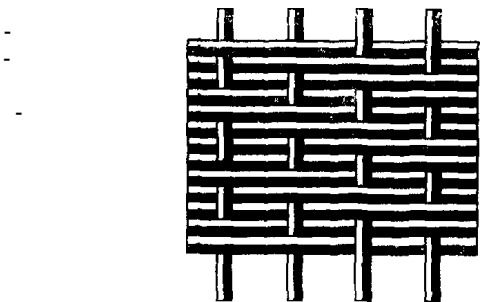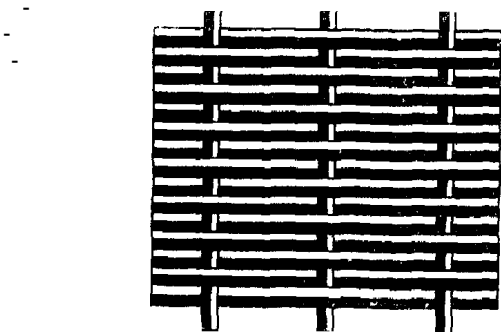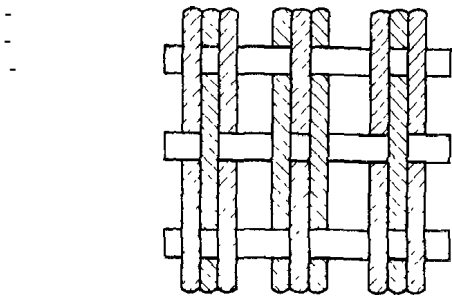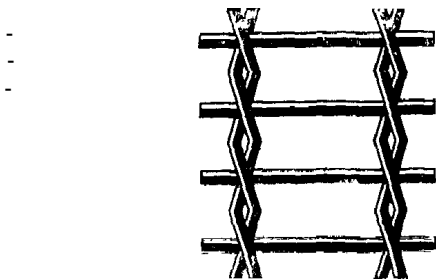


()




1

) (




1

) ,



() ,







， ，
-
0,2 1,0; 0,14 (, -
0,6)) . -
1 : 24 (, , -
200; 260 1100 , , -


-
0,18;
0,12
1 140, -
5;
1 140;
8

10 100 1,6 5,0 (-
,) , -
-

3,0 15,0 1,0 3,0 (-
,) , -
-

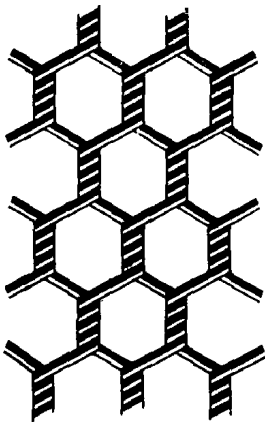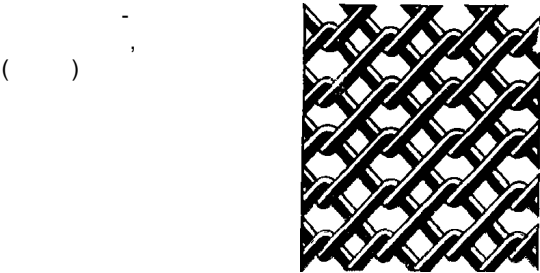






120°

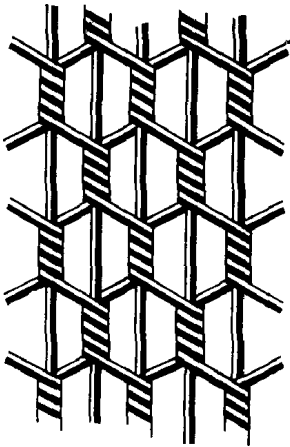

120°,
*,

		1	1 !!	L		
		1 1	1	1 L		
		1 J 1				

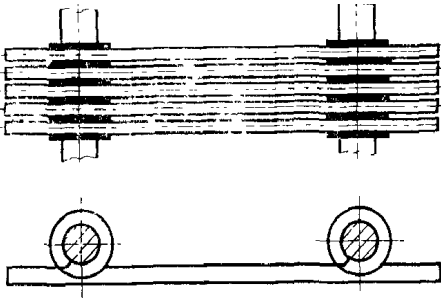

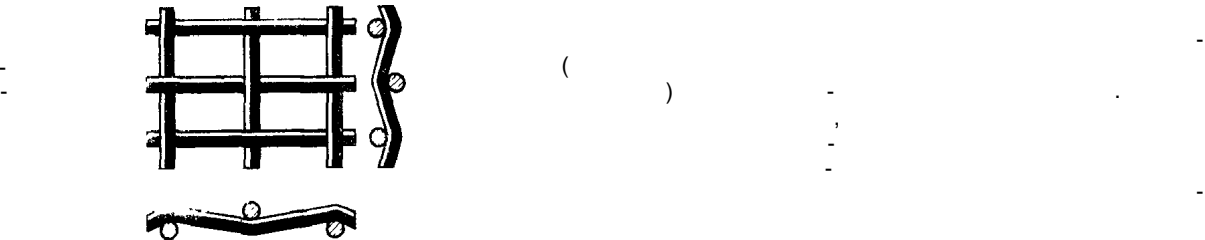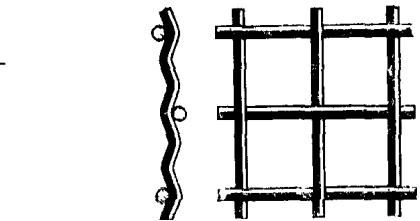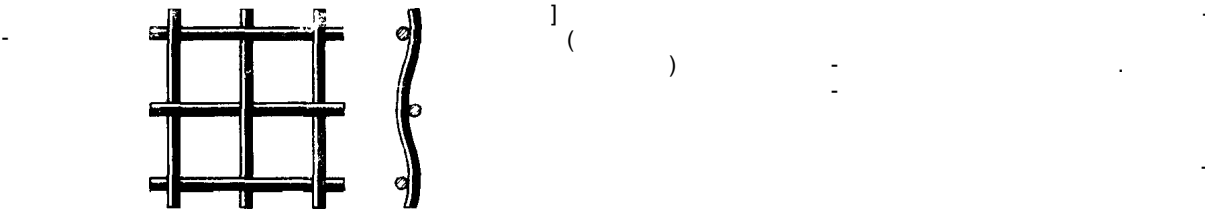

‘ ‘


1,6 25,0 0,9 4,5 - -
,
() -

4,0 25,0 1,6 6,0 -
,
-


20,0 100,0 5,0 10,0 -
,

0,7 2,5; - 0,5 1,8 - -
2,3 50,0) (-
() -

?,



^

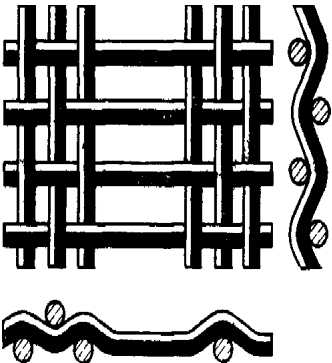

(, . 1).

Новопреченский пер. 3,
Калужская типография станшартов, ул. Московская, 256, Зак. 587

W

Сдано в наб. 28.01.87 Подп. в печ. 18.04.87 2,5 л. л. 2,5 усл. кр.-отт. 1,56 ур.-изд. л.
Тир. 12000 Цена 10 коп.

Редактор Л. И. Курочкина
Технический редактор Л. Я. Муроманова
Корректор Л. В. Мамаская