





27790—88

**Slip-in cartridge hydraulic valves.
Mounting dimensions of cavities****27790—88****41 4400****01.07.89**


100	32	16
1.	1.	—
2.	—	—
3.	32	—
— 2 * *	—	—
4.	—	—
24242—80.	—	—
5.	G	—

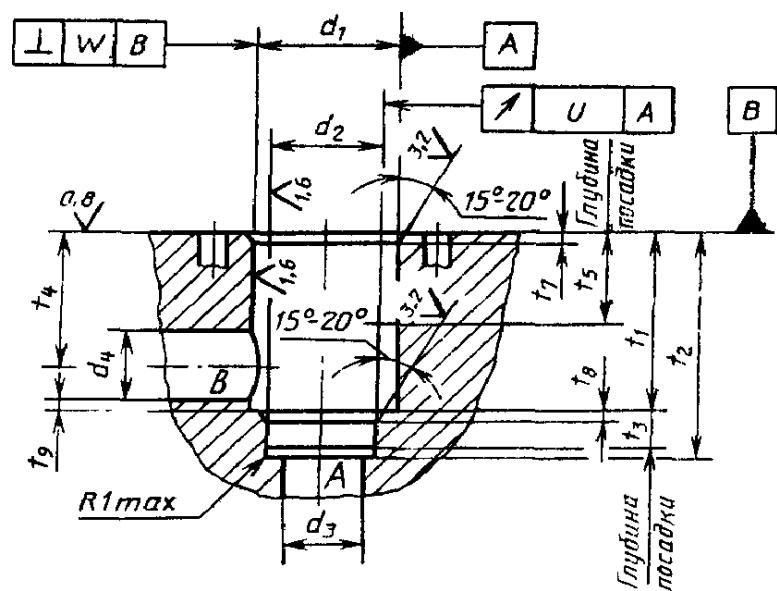

By 16 63

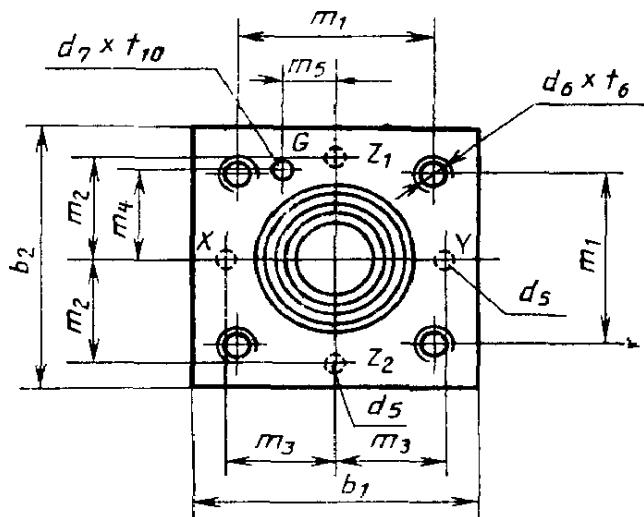

By 30

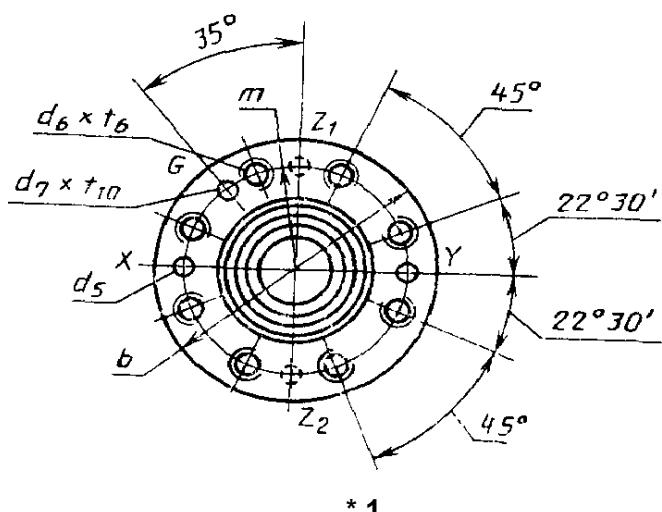

* 1

,



		6. min	mih		<i>di</i>						13	± ,	,	,	,	,	«1 ±«2	
16		65	65	32	25	16	25	16	25	4	8	4		46	25	25	23,0	10,5
25		85	85	45	34	25	34	25	32	6	12	6	—	58	33	33	29,0	16,0
32	—	102	102	60	45	32	45	32	40	8	16	6	—	70	41	41	35,0	17,0
40	—	125	125	75	55	40	55	40	50	10	20	6	—	85	50	50	42,5	23,0
»		140	140	90	68	50	68	50	63	10	20	8	—	100	58	58	50,0	30,0
63		180	180	120	90	63	90	63	80	12		8	—	125	75	75	62,5	38,0
80	250				80		80	100	16	«24		10	200	—	—	w4	**	
100	300	*	*	180	135	100	135	100	125	20		10	245	—	—	«#»	—	

,

	1,	<1		<i>it</i>	<i>h</i>	<i>ii</i> (<i>jtnax</i>)	<i>h</i>	<i>h</i>	<i>h</i>	<i>t</i> 9	flo	13	1^	<i>f</i> t
16	43	56			34	29,5	20	20	2,0	2,0	0,5	10	0,03	0,05
25	58	72	+01	12	44	40,5	30	25	2,5	2,5	1,0	10	0,03	0,05
32	70	85		13	52	48,0	30	35	2,5	2,5	1,5	10	0,03	0,10
40	87	105		15	64	59,0	30	35	3,0	3,0	2,5	10	0,05	0,10
50	100	122		17	72	65,5	35	40	4,0	3,0	2,5	10	0,05	
83	130	155		20	95	86,5	40	55	4,0	4,0	3,0	10	0,05	0,20
80	175	205	+02	25	130	120,0	40	45	5,0	5,0	4,5	10	0,05	
100	210	245		29	155	142,5	50	55	5,0	5,0	4,5	10	0,05	0,20

49

32

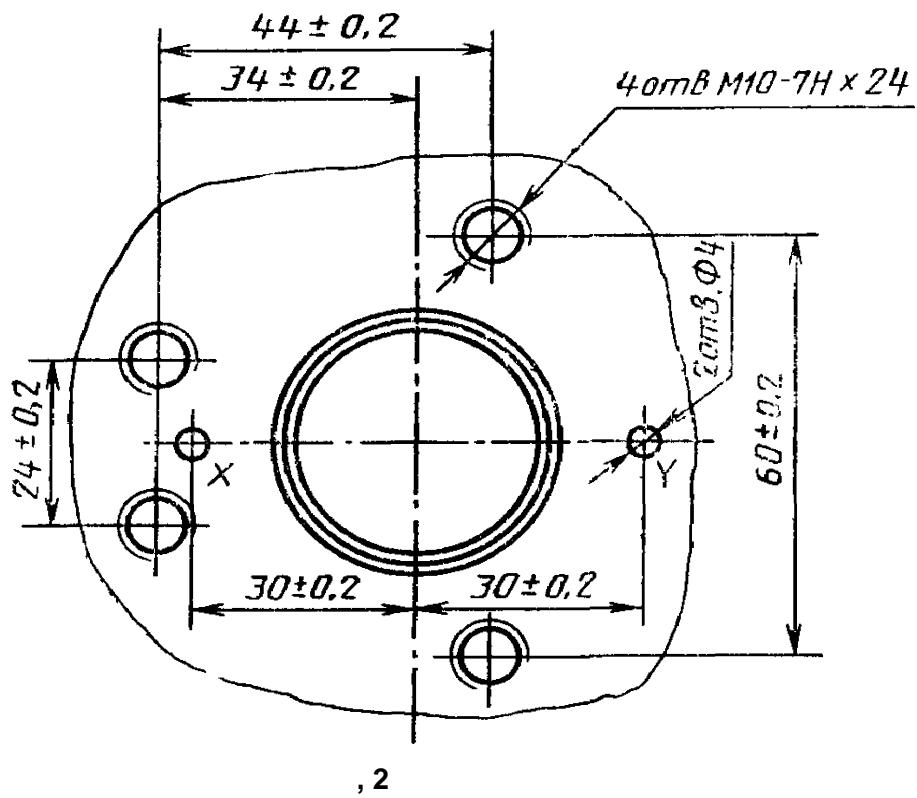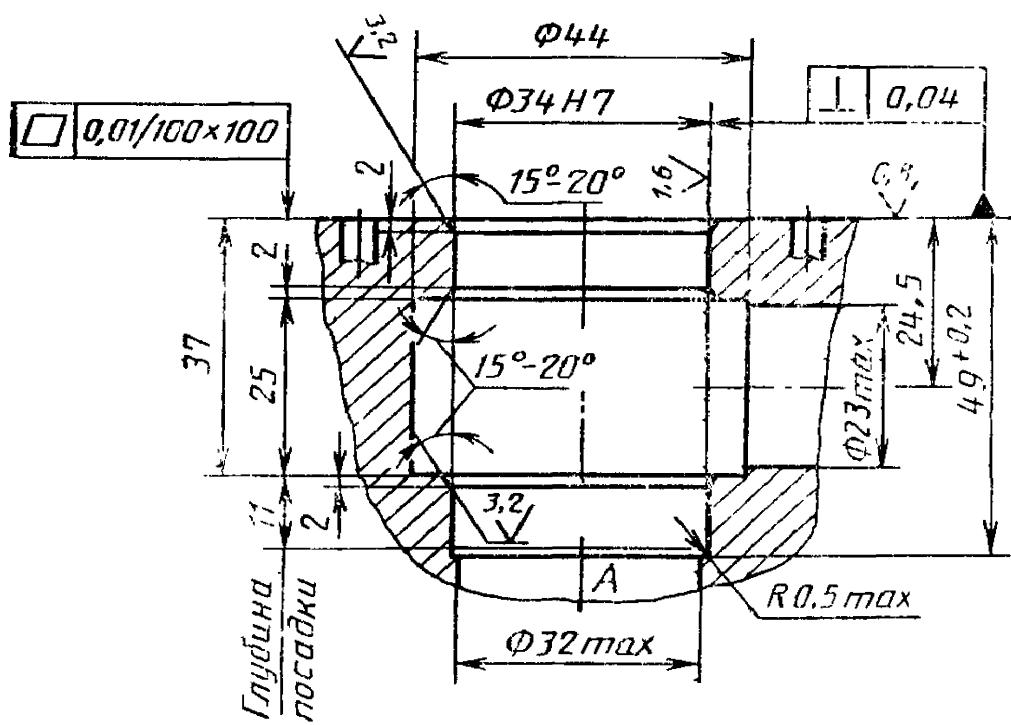

, 2

1.

2.

27.07.88

2768

3.

1995.

4.

5.

24242—80

4

« .11.08.S828.09.88 0,50,50,25
60003
« » ,123840,
. ,3.
. ,256,1788