



28009 — 88
(6015 — 87)

1—89/43

28009—88

**Rubber conveyer belts for general use.
Test methods**

(CT 6015—87)

2502

01.01.91
01.01.97

(—) -

983—78.

1.1.

16

1.2.

1 2.

1

5099

1

»

. 2

©

, 1989

2—279

. 2

28009—88

, 1

, 2

5000

1

—

. 2.

2

,

500 > 1000
1000 > 2000
2000 3500
3500 5000
5000 » 7000
» 7000 10000
» 10000

1
2
3
4
5
7
4000

2.

2.1.

()

0,5

2.2.

50

2.3.

50

2.4.

1—4

. 3.

3

630	1		1
800 » 1250	3	4	3
>1600 » 3150	2		3


$$3 \quad (65 \pm 5) > \%$$

3.


3.1.

32


三

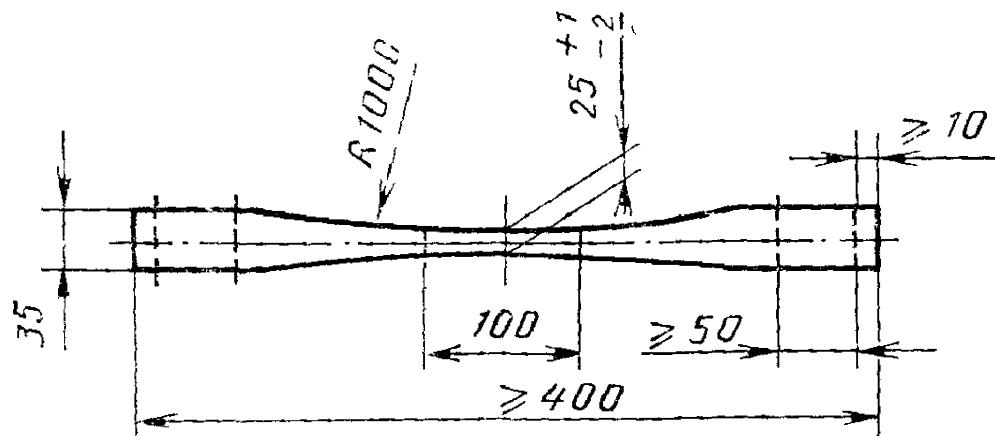


1

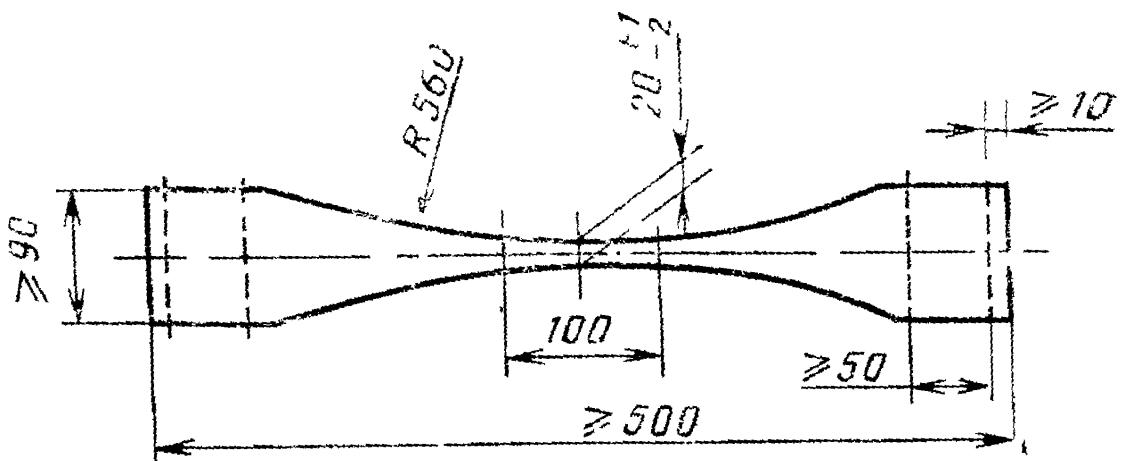

Черт. 2

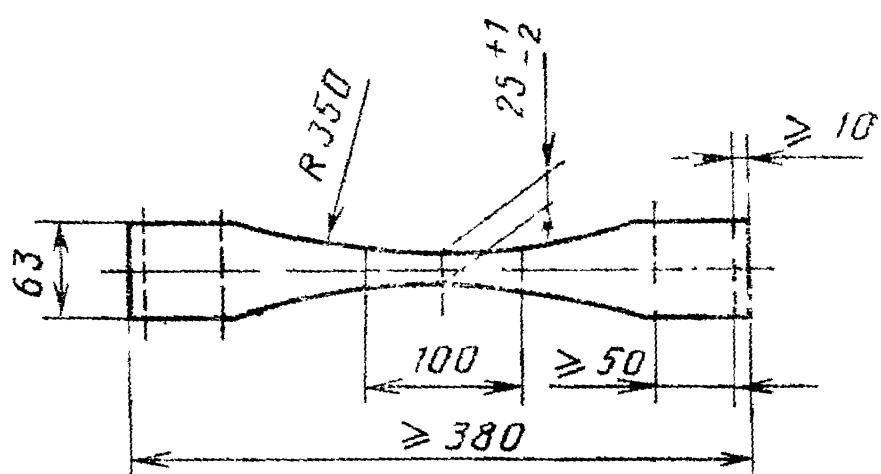


Черт. 3

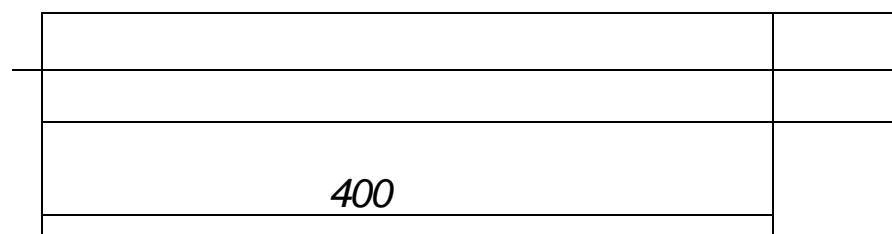

.4

3.3.

3.3.1.

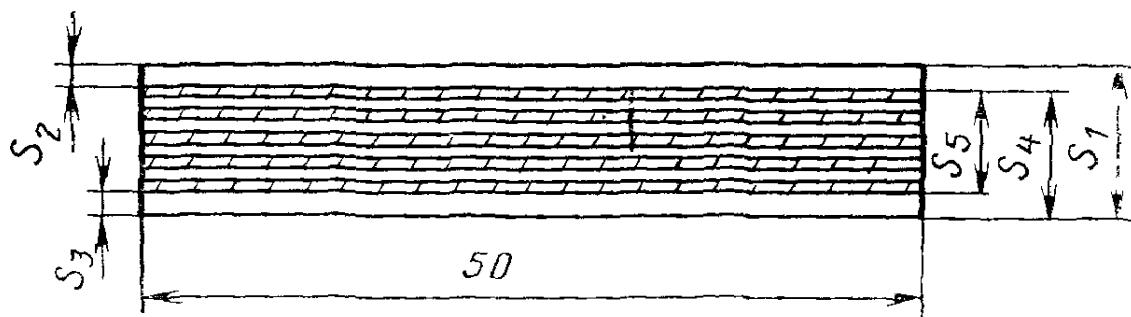0,2 ,
983—78.

. 5

3.3.2. Si (* 5)

()
 S\$, ()
 0,1
 S_b S₄

\$₅. 3.3.3. Si S₄ Sg (5₂; S₃)


3.4.

3.4.1.

. 6

3.4.2.

(100± 0,5)

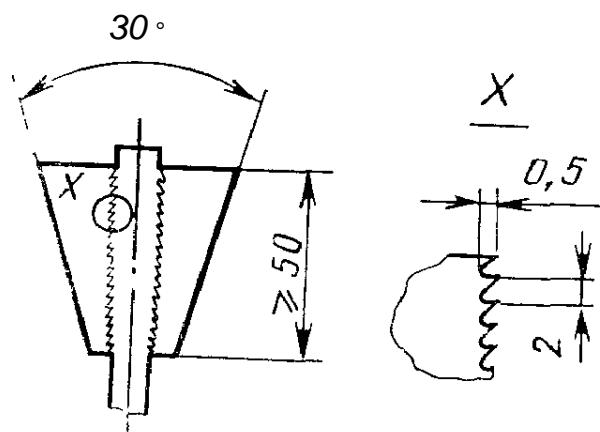

Черт. 6

3.4.3.

(ilOOihIO) /

3.4.4.

().

3.4.5.

(. 3.4.3).

3.4.6.

10%

(100=) /

3.5. — 6020—87 (100+10) $\frac{(25+1)}{/}$.
 3.6.
 2594—80 1 3.
 3.7. ,
 2049—79
 : (70±1) $^{\circ}$;
 168 . ,
 (100±1) $^{\circ}$
 24 .
 (70±1) $^{\circ}$ 168 . — 6019—87.
 3.8.

1.

2.

**29.12.88 4650
6015—87 «**

»

01.01.91

3.

4.

— 1995 .

5.

*		
3.3.1 3.7 36 38 3.5	983—78 2049—79 2591—80 6019—87 6020—87	269—66 9 024—74 270—75 23509—79 6768—75

8 000

23 01 89

0,75

0,75

<

0,49

3 1

«

»

«

» , 123840,

,

, 3aiKi 279

*

