



2833-77

11-97

—

1.

., . . . ; . . . , . .

2.

16.12.77 2920

3.

— 1992 .
— 5

4.

2833-65

5.

,	
9.306-85	5
1759.0-87	5
9389-75	3, 6

6.

,
____ (5—6—93) ^{3—93}

7.

(1998 .) 1, 2, 1983 .,
1988 .(9-83, 10-88)

021007 10.08.95. 24.02.98. 10.06.98. 0,47. 0,32.
235 . / 4787. 297. , 107076, , 14.
— . “ , , , 6.
080102

2833-77

Spring rings for screw stoppering and grooves for them.
Construction and dimensions


01.07.78

1.
,

2.
,

(
2).

D 20 170

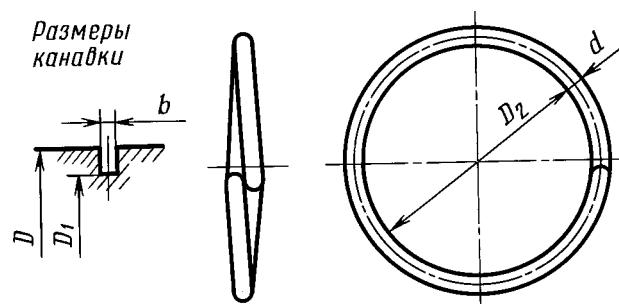

MM

() <i>D</i>					() <i>D</i>					
	<i>i</i>	<i>b</i>	<i>z</i>	<i>d</i>		<i>i</i>	<i>b</i>	<i>z</i>	<i>d</i>	
20	16,5		15		52	36	32		30	0,7 100
21	17,5		16		55	38	34		32	106
22	18,5		17		58	40	35		34	110
24	20,5		19		64	42	37		38	115
25	21,5		20		68	45	40		40	126
26	22,5		21		71	48	43		42	134
28	24		22		75	50	45		45	140
30	26		24		81	52	47		48	145
32	28		26		88	55	49		50	154
34	30		28		93	60	54			168

+

©
©

, 1986
, 1998

() D	<i>i</i>	<i>b</i>	<i>d</i> ₂	<i>d</i>	() D	D,	<i>b</i>	<i>d</i> ₂	<i>d</i>
63	57		55		180	105	98	95	310
65	59				184	110	103	100	325
70	64		60		200	120	113	110	356
75	69		65		215	125	118	120	368
80	74		70		230	130	123	130	388
85	79		75		248	140	133	140	418
90	84		80		263	150	143	150	450
95	89		85		278	160	153		481
100	94		90		294	170	163	160	514

D = 50

II

3

50II01 3 2833- 77

(3. 1, 2).

3. II, III 9389.

4.

5.

6. Z), — 1759.0.

9389. — 9.306.

6. Z), — *h* 14; *b*, *D*₂ — 14; *d* —

(7. 1).

() D,	1000 ..	() D,	1000 ..	() D,	1000 ..
20	0,157	42	0,710	90	2,335
21	0,166	45	0,777	95	2,469
22	0,175	48	0,827	100	2,611
24	0,193	50	0,864	105	6,181
25	0,205	52	0,895	110	6,481
26	0,214	55	0,968	120	7,099
28	0,227	60	1,495	125	7,338
30	0,245	63	1,598	130	7,737
32	0,266	65	1,634	140	8,335
34	0,281	70	1,776	150	8,973
36	0,302	75	1,909	160	9,591
38	0,320	80	2,042	170	10,249
40	0,679	85	2,202		

(1, 2).