



**2891-78**

1.

$\frac{1}{2} \times \frac{1}{2} = \frac{1}{4}$

**2.**

**10.02.78 423**

**3.**

**2891-68**

4.

—

7926—75 9389-75	1.3, 3.1 2.1

**5.**

,

( 11—95)

**6.**

1988 . ( 6-83, 10-88) ( 1998 . )

1, 2,

**1983** .,

Rubber for shoes bottom.  
Method for determination of pulling  
out pin resistance

2891-78

2509

01.01.79

1.

1.1. (20,0 ± 0,5) (100 ± 1) . - -

(10,0 ± 0,5) (70 ± 1) .

( , . 1).

1.2. , -

1.3. — 7926.

2.

2.1. (44 ± 1,0)  
(2 ± 0,03) , 9389.  
40° + 5°.

0,5 .  
2.2. , :  
(500 ± 25) ± 1 %;  
/ .


( , . 2).

2.3. , 2°

5 .

2.4. 40 6,0 ± 0,2 ( . ),

( , . 1).

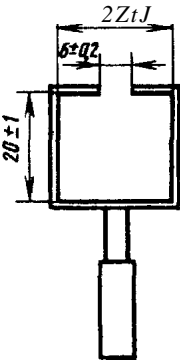

2.5.

3.

3.1.

7926

0,01

3.2.

100

70

(20 ±1)

9

3.1. 3.2. (

, . 1).

4.

4.1.

4.2.

( , . 2).

5.

5.1.

( ) / ( / )

= ,

— , ( ),  
h— , ( ).

5.2.

1,0 / (0,1 / ),

10 %

10 %,

5.1, 5.2. (

, . 1).

021007 10.08.95. 30.04.98. 16.06.98. . . 0,47.  
- . 0,33. 133 . 731. . 479.  
, 107076, , „14.  
— .” „, , „6.  
080102