

30304-95
(4674-77)

11-96

1

« (»)

2

(8—95 12 1995 .)

:

	,

3

4674—77 «

»

4

4
30304—95

1996 . 559

5

1 1997 .
16010—70 (

)

©

, 1997

1	1
2	1
3	1
4	
5		
6		
7	
8	
9	

**Fabrics coated with rubber or plastics.
Determination of tear resistance**

1997*-01-01

1

(Aj 2)

Aj 2

2

166—89
29062—91

3

4

0,10

(. .

)

(

)

5

1.

	1	—	2	3	4
	0	—	2	3	4
K	2	—	4	5	4
	0	—	0	5	4
	3	—	5		
	0	—	0		

1

6

16

4

2

3

3

7

29062.

24

8

8.1.1

$(5,0 \pm 0,2)$ / , 300, 12,0 / $(1,70 \pm 0,17)$ / , 100,0 \pm 10,0 / ().

15 85 %

2 %

0,4 %

75

3

30304-95

0,4

166.

8.1.2

..

8 2.1

(

1)

(225,0±1,0)

(75, ±,0)

(100,0±,)

(25,0±0,5)

8 2.2

,

(

2)

ab cd

25

8.1.2.3

50 %

8.1.3

8.1.3.1

(225,0±1,0)

3)

(75,0±0,5)

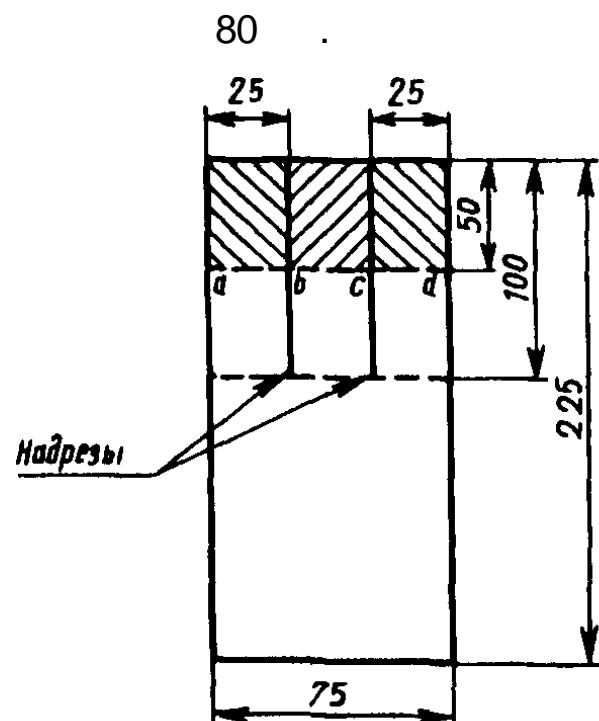


Рисунок 2


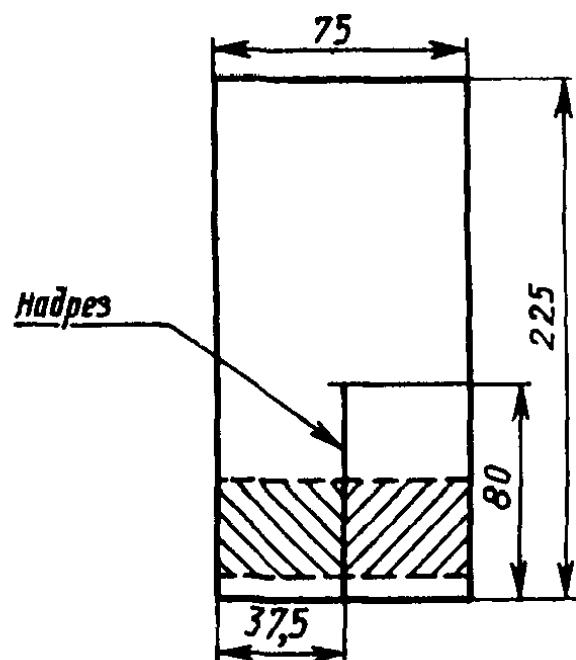


Рисунок 3

8.1.3.2

4,

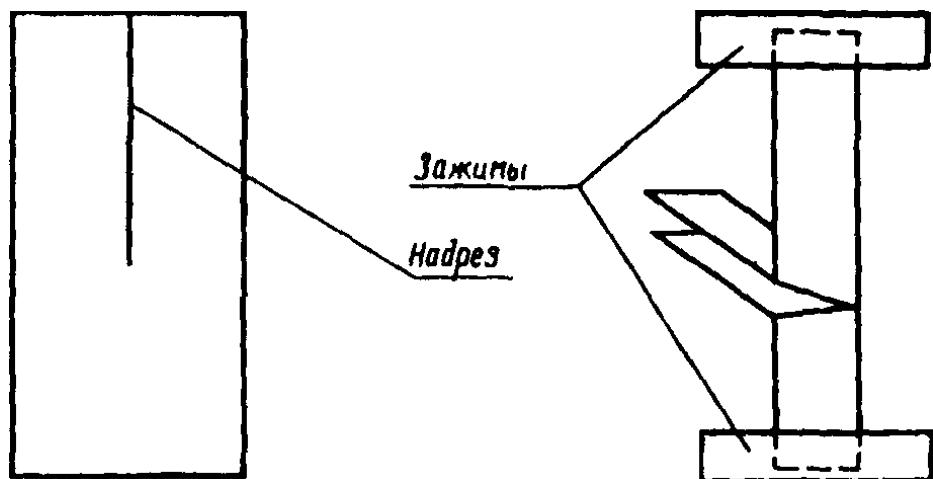

4

8 .3.3

50 %

9

$(A_t \quad 2)$

677.077.65.001.4:006.354 83.140 69 2566

;

,

,

,

P C.

021007 10.08.95. 24.12.96. 17.03.97.
0,70. . . 0,53. 211 . 28 . 42.

107076, , ., 14.

— “
, ., 6. ”