



6527—68

5—92

-

10

Screwed ends with
pipe cylindrical thread
Dimensions

6527—68

01.01.69


01.01.96

1.


25' / 2;

2

1.

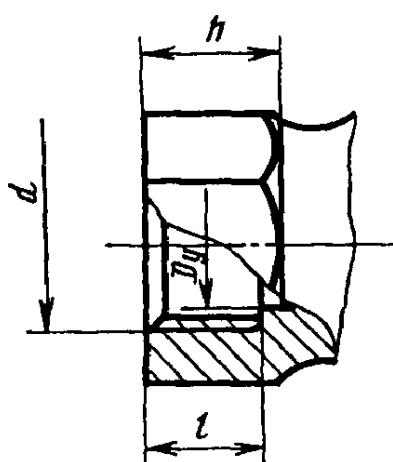

16 / 2

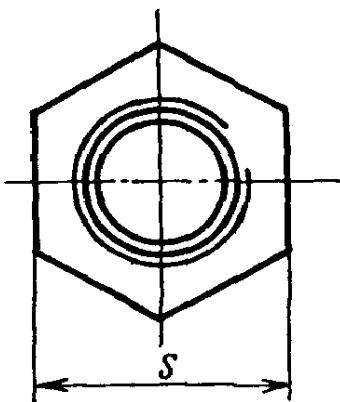

©

, 1993

3													
>.	<i>d</i>											<i>Jh</i>	
X * *>		5			5			5		<16	<25	<18	<23
6	<i>G'U</i>	19	9	10	—	—	—	19	9			7	
10	<i>G³I_s</i>	22	10	12	27	12	14	22	10	12	8	12	
15	<i>G'U</i>	27*	12	14	30	14	16	27	12	15	9	13	
20	<i>G4«</i>	36	14	16	36	16	18	32	14	i 7	10	14	
25	<i>G1</i>	41	16	18	46	18	21	41	16	19	12	16	
32	<i>GI</i> — 4	50	<i>ib</i>	21	55	20	23	50	18	22	14	18	
40	<i>oi-L</i> 2	60	20	23	60	22	26	60	20	—	16	—	
50	<i>G2</i>	70	22	25	75	24	28	70	22	—	18	—	
65	<i>G₂i</i>	90	25	28	90	26	30	90	25	—	20	—	
80	<i>G 3</i>	100	28	31	105	30	34	100	28	—	22	—	

*

30

.

(3. (, . , 2, 3).
4. — 3).

5. — 356—80.

6357—81.

(, . , 2).

6. () — 10549—80.
7* , — *

6424—73.

() » . 1). « »
8. ,
. 2.

2

«	» S	
19	30	—1,3
32	50	-2,0
55	60	—2,4
70	105	-2,8

(, . 1).

. 4

6527—68

1.

, . . (), . .

2.

,

29.07.68

3. 1994 ., — 10

4. 6527—53

5.

,	
356—80	4
6357—81	5
6424—73	7
10549—80	6

6. (1993 .) 1, 2, 3,
1989
1974 ., 1985 .,
(5—74, 4—85, 4—89)

7. 1984 .
30.01.85 213 01.01.96

20 01 93	15 03 93	0,375 0,21	1112	0,375
«	»			
			, 107076,	
			, 6 ,	56

.. 14