



**799-73**

10-96

**799-73**

Fishplate bolts for broad gauge.  
General requirements

**01.01.74**

38      43.

16018

( 6305—4—85),

( , . 2).

1.

1.1.

. L

©



©

, 1973

, 1997

.2

799-73

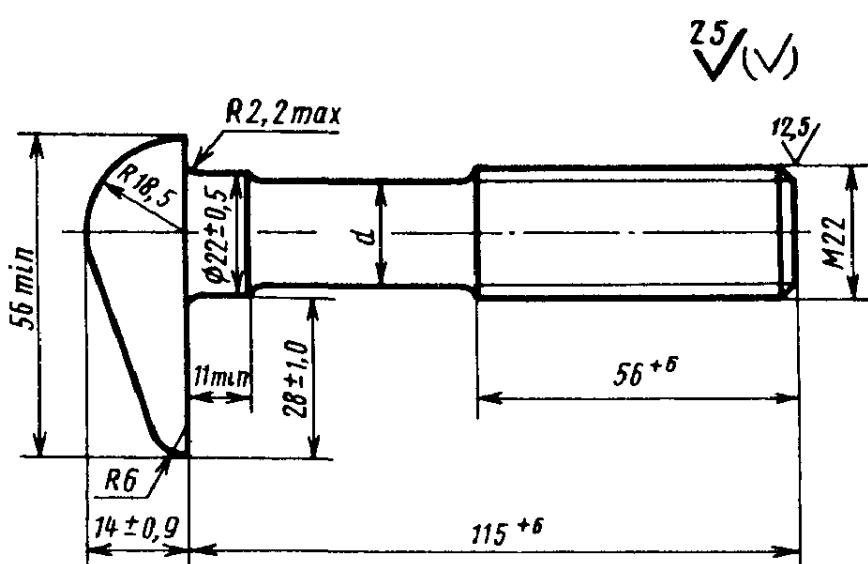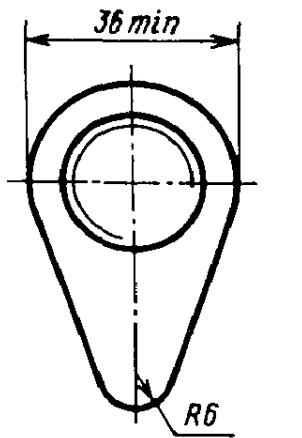

$d^*$

.1

, 22 ,  
8g, 115 , 3.6:  
CM22~8g 115.3.6 799-73.

( , . 1, 2).  
1.2. ( , . 2).

2.

2.1.

1759.0.

2.2.

3.6

1759.4.

2.3. —

24705.

— 8g

16093.

2.4.

0,9

2.5.

16018.

2.6.

1759.2.

2.7.

2.8. 1000 .

( ) — 400 .

2.9.

1759.0.

2. ( , . 2).

3.



3.1. — 17769

3. ( , . 2).

4.

4.1. — 1759.4.

. 2.

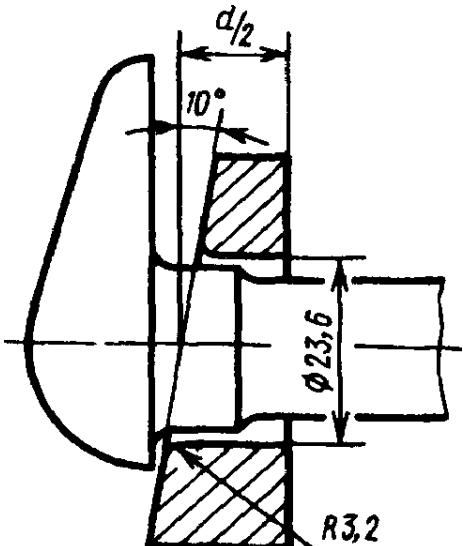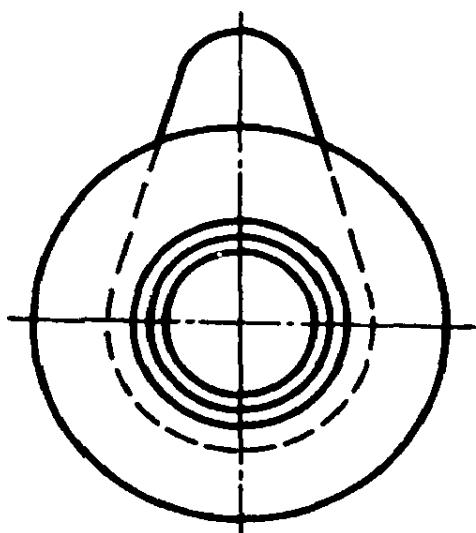

. 2

( , . 2).

5.

5.1. — 18160.

. 4

**799-73**

1.

( - )

- . , . . , . . , . .

2.

**22.02.73 431**

3.

**799-41**

4.

,	
17590—87	2.1, 2.9
1759.2—82	2.6
1759.4-87	2.2, 4.1
16018-79	, 2.5
16093-81	2.3
17769-83	3.1
18160-72	5.1
24705-81	2.3

5.

**28.12.92 1573**

6.

( 1997 .)  
1983 ., 1992 .( 4—84, 3—93)

1, 2,

-

*\twumw*

<b>Ns 021007</b>	<b>10 08 95</b>		<b>12 05 97</b>		<b>27 05 97</b>	
	0,47	-	0,30	151	546	397
				, 107076, , 14		
				—	“	”
					080102	