



8144—73

8144.73..

Fishplate bolts for narrow gauge.

8144—56

22 1973 . 431

01.01.74

1983 . 19.12.83 6329


01.01.94

(, . 1).

1.

1.1.

1

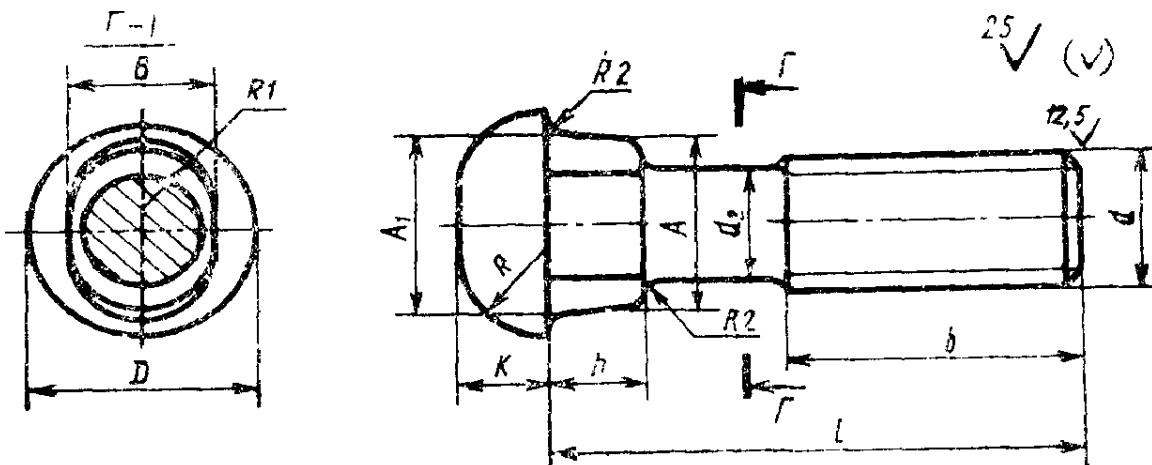

$d_2 \approx$ среднему диаметру резьбы.
Черт. 1

1983 . (I,
4-84).

©

, 1985

	<i>d</i>	12	16	18
		1,75	2	2,5
	<i>D</i> (. . . h_{i_5})	20	27	31
	(. . . jsie)	7,5	9,5	11,5
	<i>R</i>	8	11	12
	<i>R%</i>	1		1,5
	(. . . h_{i_5})	15,5	21	23,5
	1 (. . . jsie)	16,5	22	24,5
	(. , - h_{i_5})	12	16	18
	<i>h</i> (. . . his)	7	9	10
	<i>Ri</i> ^	6,5	8,5	9,5
	1 (. . . jsiy)	58	72	88
	.	30	35	45
	.	+ 3,5	+4	+5
,			0,9	

d = 12 ,

5,8:

12.58

8144—73

(, . . 1).

1.2. — 24705—81, 8g —
16093—81.

2.

2.1. 12

16 18 — 3.6 5.8, 5.8 1759—70.

2.2. :

) ; 1 , -

) V ; ;

) 0,5 () -

) ;

)

2.3.

5915—70.

5 1759—70.

2.4.

2.5. — 1759—70

(, . 1).

3.

3.1. — 17769—83.

4.


4.1. — 1759—70

. 2.24:

(. 2).

. 4

8144—73

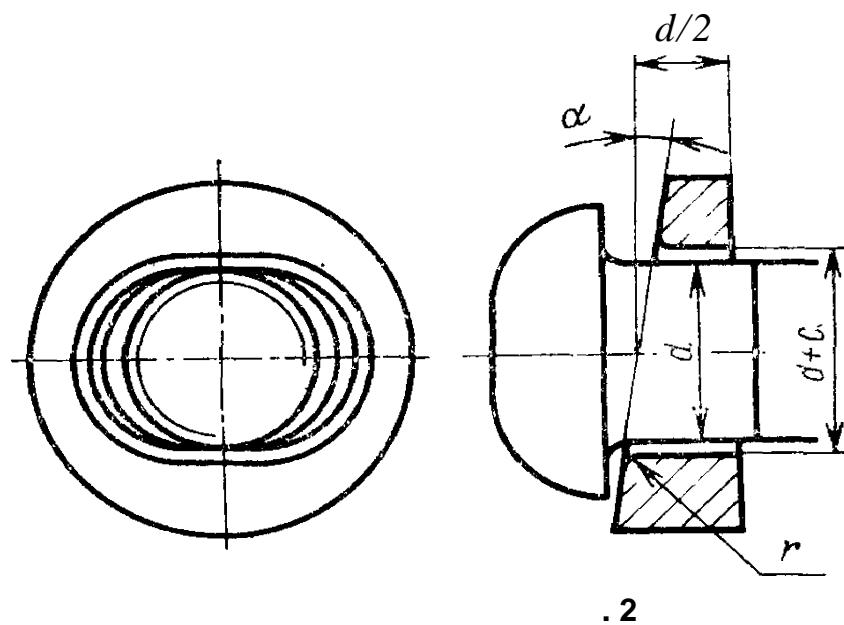

. 2

5.

5.1.

—

18160—72.

8144—73

<i>d</i> ,	, 1000
12	59,16
16	135,83
18	207,42

27.09.84 . . . 20.02.85 0,5 . . . 0,5
 6000 3
 « * 123840, , ,
 , . 3. , . , , 12/14. . 4633