



89-73

4.97

I'

) 3

89-73*

Rolled-in lead sheets.
Specifications

89-41**IS 3620**» **12** **1973 . 75****01.01.74**(**11 — 12—94** **5—94** ,)(. . . **2, 3).****I.**

1.1.

	2150	2800	2150	2800
1.0	± 0.14	—	123	—
2.0	± 0.14	—	450	—
3.0		± 0.15	—	900
4.0	—	± 0.20	—	1100
5.0		± 0.22	—	1350
6.0	—	± 0.27	—	1450
7.0	—	± 0.27	—	1700
8.0		± 0.35	—	1700
9.0		± 0.35	—	1650
10.0		± 0.38	—	1850
12.0	—	± 0.38	—	1450
15.0	—	± 0.38	—	1850

I -

*

(**1997 .)**
1985 ,**Ns I. 2. 3.**
1990 . (/0-77. 5-85. 6-9(0**(97? .,**

&

©

, 1973


, 1997

1.2.

1.3. (

.. . 2).

±1 %.

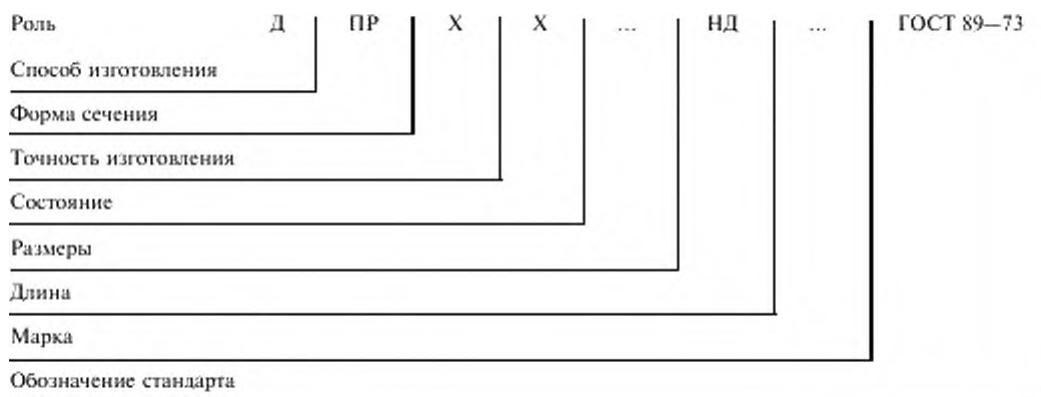

10.0 . 2800

10.0 2800 I 89-73.

(

2).

2.1 .

(

2.1.

2.2.

10

(

2).

3.

3.1.

(

3.2.

3.3.

10000

10000 .

10000

3.4.

3.3. 3.4. (. . . 2).

4.

4.1.

4.2.

100

20

6507—90

7502—89

4.3.

24231—80.

20580.0-80 -

20580.8-80.

4.2. 4.3. (. . . 2).

4.4. (, . . 2).

5.

, , ,

5.1.

; ; ; ;

5.2.

10198-91.

1—2

—2

3000

5.3.

— (15846—79.

».

5.4.

— 14192—96.

5.5.

(

3).

5.6.

(

, . . 2, 3).

	1 2	
		1 , ,
1.0		11.37
2.0		22.74
3.0		34 1)
4.0		45.48
5.0		56.85
6.0		68.22
7.0		79 59
8.0		90.96
9.0		102.33
10.0		113.70
12.0		136.44
15.0		170 55
	I -	
11.37 / 5.	.	

pci

021007	10.08.9\$.	28.10.97.	12.11.97.	0.93.
	. . . 0.47.	112 . C1088.	. 800.	
		, 107076.		.. 14.
		"	"	.. 6.
		080102		