

**8955-75**

■



2010

**8955-75**

Ductile iron fittings with  
parallel thread for pipelines.  
Straight long sockets. Basic dimensions

**8955-59**

23 040.60

14.11.75 2901

01.01.77**2-92**

( 2-93)



1 .  
1 — ;  
2 —

3303-81.

( , . 2).  
1.

1

2

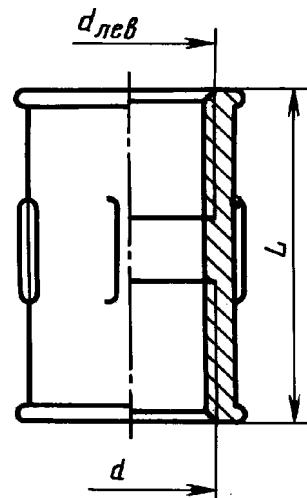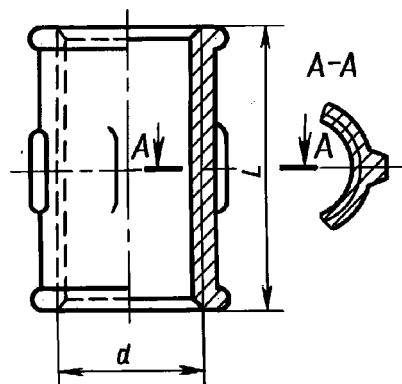

( 2010 .)

1, 2,  
( 11-80, 7-83).

1980 .

1983 .

©  
©, 1975  
, 2010

$D_y$	$d$	$L$		, , *	
				8944—75	
				1	2
8	G %-	27	2	0,034	0,036
10	G $\frac{123}{8}$ -	30	2	0,044	0,047
15	G $\frac{2}{2}$ -	36	2	0,074	0,079
20	G $\frac{3}{4}$ -	39	2	0,108	0,111
25	G 1 -	45	4	0,173	0,173
32	G 1 $\frac{1}{4}$ -	50	4	0,245	0,245
40	G 1 $\frac{2}{2}$ -	55	4	0,342	0,296
50	G 2 -	65	6	0,560	0,506
(65)	G 2 $\frac{2}{2}$ -	74	6	0,780	0,703
(80)	G 3 -	80	6	1,000	1,010
(100)	G 4 -	94	6	1,975	1,805

\*  
1.  
5 %.  
2.  $D_y$ ,  
1       $D_y = 40$  :  
1—40      8955—75  
,  
1- -40      8955—75  
(      , . 1, 2).  
2. —      8944—75.