

8961—75



2010

8961-75

Ductile iron fittings with parallel thread for pipelines.
Locknuts. Basic dimensions

8961-59

23.040.60


14.11.75 2901

01.01.77

2—92

(2—93)

1.

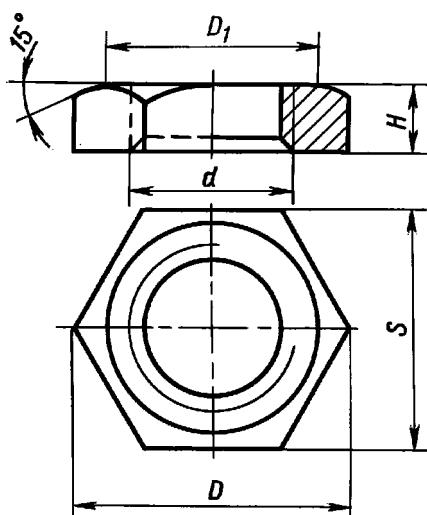

D_y	d		S	D		$\cdot \cdot \cdot$
8	G $\frac{4}{4}$ "	6	22	25,4	20	0,013
10	G $\frac{3}{8}$ "	7	27	31,2	25	0,023
15	G $\frac{2}{2}$ "	8	32	36,9	30	0,034
20	G $\frac{3}{4}$ "	9	36	41,6	33	0,041
25	G 1-	10	46	53,1	43	0,077
32	G 1 $\frac{1}{4}$ "	11	55	63,5	52	0,109
40	G 1 -	12	60	69,3	56	0,127
50	G 2 -	13	75	86,5	70	0,212
(65)	G 2 $\frac{2}{2}$ "	16	95	110,0	90	0,425
(80)	G 3 -	19	105	121,0	100	0,513
(100)	G 4 -	21	135	156,0	128	0,938

*

1.

5 %.

2. D_y D_y 50

50 8961—75

-50 8961—75

(1).

— 8944—75.

(2010 .)

1,

1980 . (11—80).

©

, 1975

©

, 2010