

0 650°


9065-75*

Washers for flanged connections with medium temperature from 0 to 650 °C
Types and main dimensions

9065-69

1985 .	27.12.85 4667	28	1975 .	794	-
					01.01.76
					01.01.96

1.
, , ,
0 650° .
4 (40 / 2).
(1).
2.

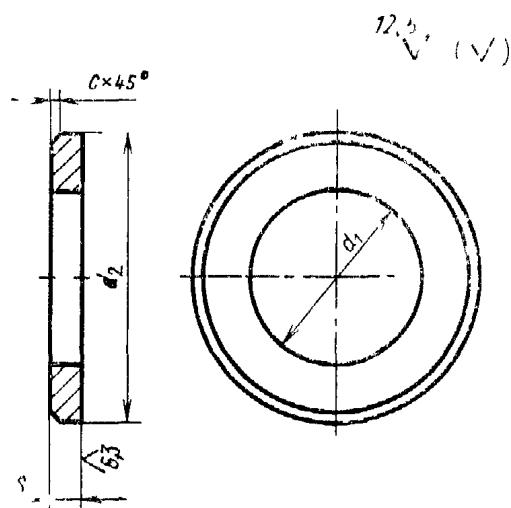

* (1986) 1, 2 (9-80, 4-86). 1980 ., 1985 .

	<i>d</i>	10	12	16	20	(22)	24	(27)	30	36	42	48
12)	<i>d\l(</i>		13	17	21	23	25	28	31	37	43	50
<i>h4)</i>	(18	24	30	37	33	44	50	56	66	78	90
<i>h4)</i>	<i>s(</i>		2,5			4		5		6		10
			0,5			1,0			1,6			2.0
		0,5				0,6					0,7	

	<i>d</i>	(52)	56	(60)	64	(68)	72	(76)	80	90	100	110	(120)	125	140	160
#12)	<i>d\l(</i>	54	58	62	66	70	74	78	82	92	102	112	122	127	142	162
<i>hU)</i>	<i>ds(</i>	95	100		115	120	126	132	138	155	174	190	208	215	242	276
④ 14)	<i>s(</i>				10				12			14				16
							2,0			3,0					4,0	
							0,8			0,9				1,0		1,2

1.
2. : , ,
— *h 14,* — ,
3. ,
20, III, > 4, 0,2, 9 : 48
48.20.111.4.029 9065—75

(, . 1, 2).
 3. ?
 4. — 20700—75.
 5. (, . 2).

	1000 .	()	1000 .
	,),	, «
10	4,20	60	508,57
12	6,27	64	546,35
16	9,41	68	555,20
20	22,87	72	640,64
22	24,44	76	838,25
24	32,30	50	910,69
27	52,55	<0	1177,18
30	66,99	100	1713,76
36	110,40	110	2031,47
42	156,52	120	2447,49
48	344,96	125	2595,48
52	376,31	140	3784,70
56	408,79	160	4921,30

(, . 1).

2 . (, . 2).