

,

JP_y 20—100
(200—1000 / *)

9400—81

—92

,

20—100 (200—1000 / *)

9400—81

Threaded connecting ends for valves, fittings and
pipes with lens-shaped seals for P_n 20—100 MPa
(200—1000 kgf/cm²). Dimensions

36 8380

27

1981 . 1138

01.01.82

1.

,

20—100 (200—1000 / ²) D_r 6—200
50 510° .


(2. , . 1,2).

©

, 1981

©

, 1993

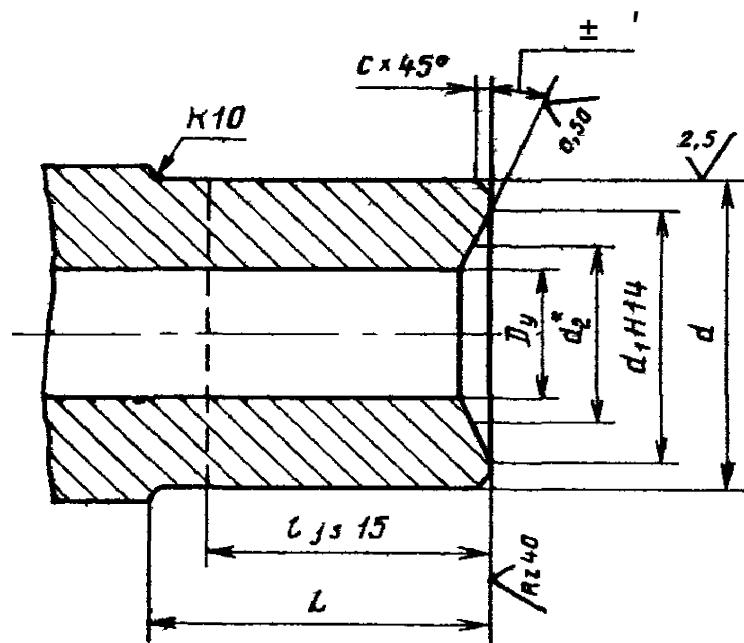

*

D_y	d	di	$di ($)	L	I	«		
6	14 1,5	10	,2	32	22	1,6		
	16 1,5*							
10	24 2	18	13,7		28			
15	2	28	20,5	42	35	2,0		
25	42 2	37	41,0					
	48 2	40	(5)	40				
32	48 2	43						
	56	48	60	50				
	64	55						
40	64	49,9	65	55	3,0			
	80					65		
50	80	72	67,0	75		65		
		82						
65	1 0	90	78,7	80	70	3,0		
	110	95						
	125 4	85		7				

>	<i>d</i>	<i>di</i>	<i>d_s</i> ()	<i>L</i>	<i>l</i>		
80	110	100	95,7	80	70	3,0	
	125 4	115		85	75		
	135 4			95	85		
	155 4	120		100	90		
	125 4	115	109,4	85	75	4,0	
	135 4	125		95	85		
	155 4	132		100	90		
	175 6			115	105		
125	155 4	145	136,8	100	90	3,0	
	175 6	162		115	105	4,0	
	190 6			120			
	2 5 6	165		130	120		
150	190 6	175	166,2	120	110		
	215 6	195		130	120		
	240 6			140	130		
	265 6			165	155		
200	240 6	225	212,0	140	130		
	265 6	245		165	155		
	295x6						

•

,

(

, . . 1).

3.

,

4.

, — 16093.

24705

6 g —

5.

— /;

10549;

9150.

4, 5. (

, . M1).

. 4

9400—81

,

,

,

,

,

,

,

,

7. — 28338.
8. — 356.

1.

(), . ,

2.

27.02.81

1138

3.

— 1991 ,

— 5

4.

PC 2374—70

5.

9400—75

6.

356—80 9150—81 10549—80 16093—81 24705—81 28338—89	5 5 4 4 7

7.

1990 .

26.02.91 176

8.

(1993 .)
1988 . , 1991 . (1, 2,
12—88, 5—91)

.. Af.

» . ISj CM.9^ , . 14 07.93. . 0.47. . 0.47*
0j3Q. . 765 . {357.

« . »
, « . »
» , . 107076, . 6. , . 34 . , 14-