



9592—75

9592-75* *

Ball bearings with broad inner race.
Specifications.

9592—61

27 1975 . 3672

01.01. 1977 .
01.01. 1982 .

1. -

, -
-

1 "1.

2. 900000— -

980000 — ;

981000— ;

971000 — -

80700— -


3. . 1—5 . 1—5.

* (1079 .) 1978 . (2—79)^{1,}

®

, 1979

900 000

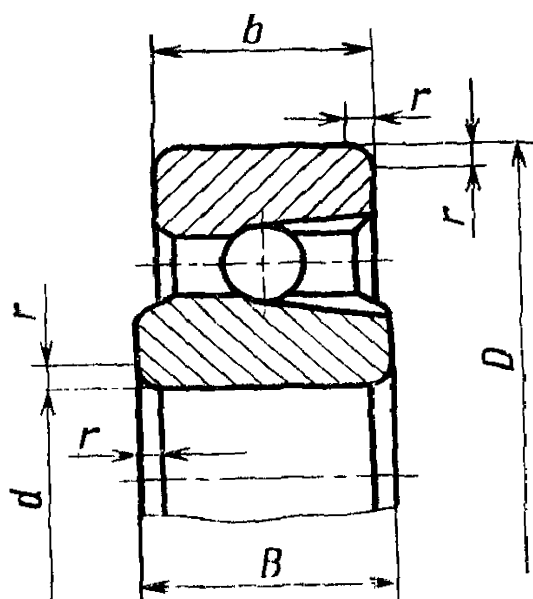


. 1

	d	D			1
900000					
900803	17	26	6,0	7,0	0,5
900904	22	35			
900805	25	37			
900705		42	6,0	7,0	
900706	30				
900907	34	45			
900808	40	52			
900709	45	58^			
900810	50	65			
900811	55	72			
900912	58	73			
7900812	60	78			

2

980 000

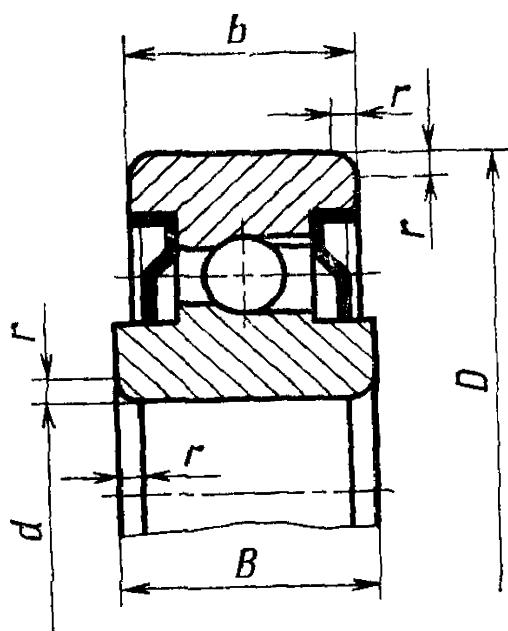


Черт. 2

	d				
980000					
980055		16	5,5	7	
980065	5				
980085		20	7	8	0,5
980077	7	19	6		
980067		24	9	12	
980079	9		7	9	
980800	10	30	9	13	
980700		37	J2	16	
980704	20	42	10	11	1,0
980705	25	52	12	15	
980706	30	55	13	16	
980708	40	68	15	18	

981 000

3

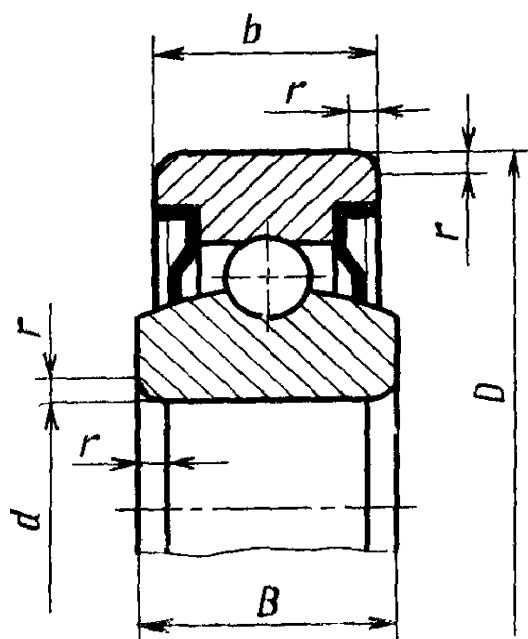


Черт. 3

981000		D			
981065	5	20	7	8	
981067	7	24	9	12	
981028	8	24	12	16	0,5
981068		30	10	14	0,8
981700	10	37	12	16	0,5
981701	12	42	13	17	0,8
981702	15	52	15	20	1,0
981704	20				
981805	25	62	17	22	1,5
981806	3Q	72	19	24	


971 000

4

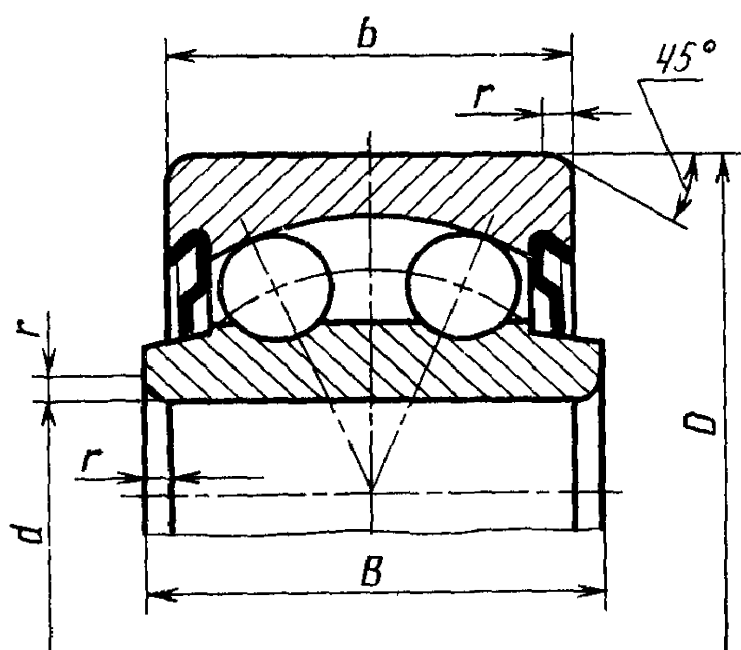

971000	d	b			
971067	7	24	12	18	0,5
971800	10	37	16	20	1,0
971801	12	42	13	19	1,5
971802	15	52	15	24	2,0

. 4

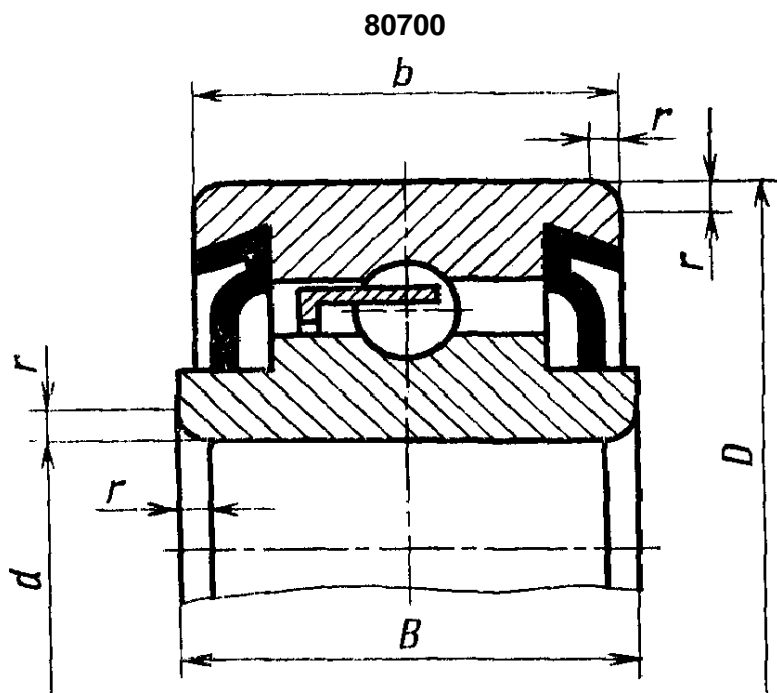

5

	d	D			
80700					
80701	12	30	8	10	0,5
80702	15	35	11	14	
80703	17	40	12	16	
80704	20	47	14	18	
80705	25	52	15		1,5
80706	30	62	16	20	

. 5

d — 15 ,

D — 35 , b 1 [, 5= 14 :

80702

9592—75

4.

4.1.

520—71 (

0)

4.2.

900000

. 6 7.

6

d_t						
	\wedge		d			
2,5 30	— 1C	+ 10	— 13	+ 13	—120	0
. 30 50	— 12	+ 12	—15	+ 15		
. 50 80	—15	+ 15	-19	+ 19		

$D_{\text{т}}$				
	D_{op}		D	
6 30	— 18		—21	-f 2
. ,30 50	—22	0	—24	+3
. ,50 80	—26		—27	+ 4

4.3. — 3325—55. -

4.4. -

0,2 .
4.5. -

4.6. -
- -

4.7. -

4.8. .
4.9. .

, -

4.10. — 24 12 , -

- 9.014—78. -
4.11. , , -

— 520—71. ,

5.

5.1. -

4, 5. (, . 1).

· 06.08.79 · 06.09.79 0,5 · 0,24 · - · 10000 3 ·
« » , , -557, , 12/14, , 3665” · 3.